





























Manual tile cutting
Manual Tile Cutters
Scoring wheels and accessories for manual cutters

02.	Circular saw
16	Cutting

03.	Handling and installing
24	Handling
26	Installing

04.	Electric tile cutting			
34	Electric cutters and mitre saws			
48	Accessories and Vacuums Cleaner			

05.	Diamond blades
56	Dry cutting diamond blades
60	Wet cutting diamond blades

06.	Drilling
66	Tools for drilling ceramic tile, stoneware, marble, granite and other materials



























07.	Grinding & polishing
74	Bevelling, Grinding wheels and blades
82	Polishing pads
08.	Mixing
86	Electric Mixers
94	Mixing Paddles
09.	Tools for fixing tiles and finishings
98	Trowels, Brick Trowels, Floats, Rubber grout, Spatulas
102	Scrapers, Makers, Supports and Templates, Mallets
105	Suction cups, Work Table, Tools box, Hammers, Shovels, Chisels
10.	Accessories for fixing tiles and finishings
114	Measuring systems
115	Tile Spacers
118	Levelling Systems
11.	Buckets and tubs
124	Plastic products for construction

Safety equipment

Cleaning and maintenance

Safety equipment for construction professionals


Products and accessories for cleaning and installing ceramic tile

12.

130

13.

134

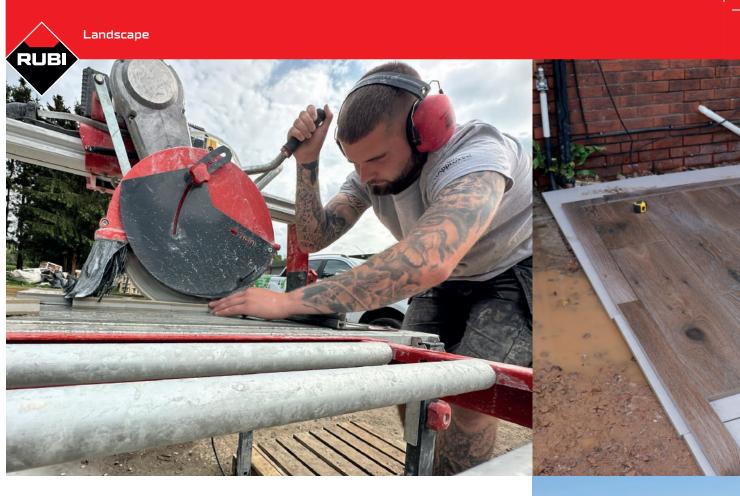

LANDSCAPE


As a leader in the field of professional tile installation tools, RUBI Group constantly develops new solutions based on the market and the needs of the professional trades' person.

We produce high-quality tools and accessories that make the demanding work tilers, landscapers and construction workers carry out as easy and hassle-free as possible.

As the materials used in the landscaping market has evolved and developed, we recognised a need to produce products that are capable of performing to the high quality that is now expected within the industry. Materials such as 20mm porcelain require specialist tools for the professional to make accurate cuts with a high-quality finish.

From internal bathroom and kitchen tiles to large format wall tiles and porcelain paving slabs, RUBI continues to be at the forefront of the industry.




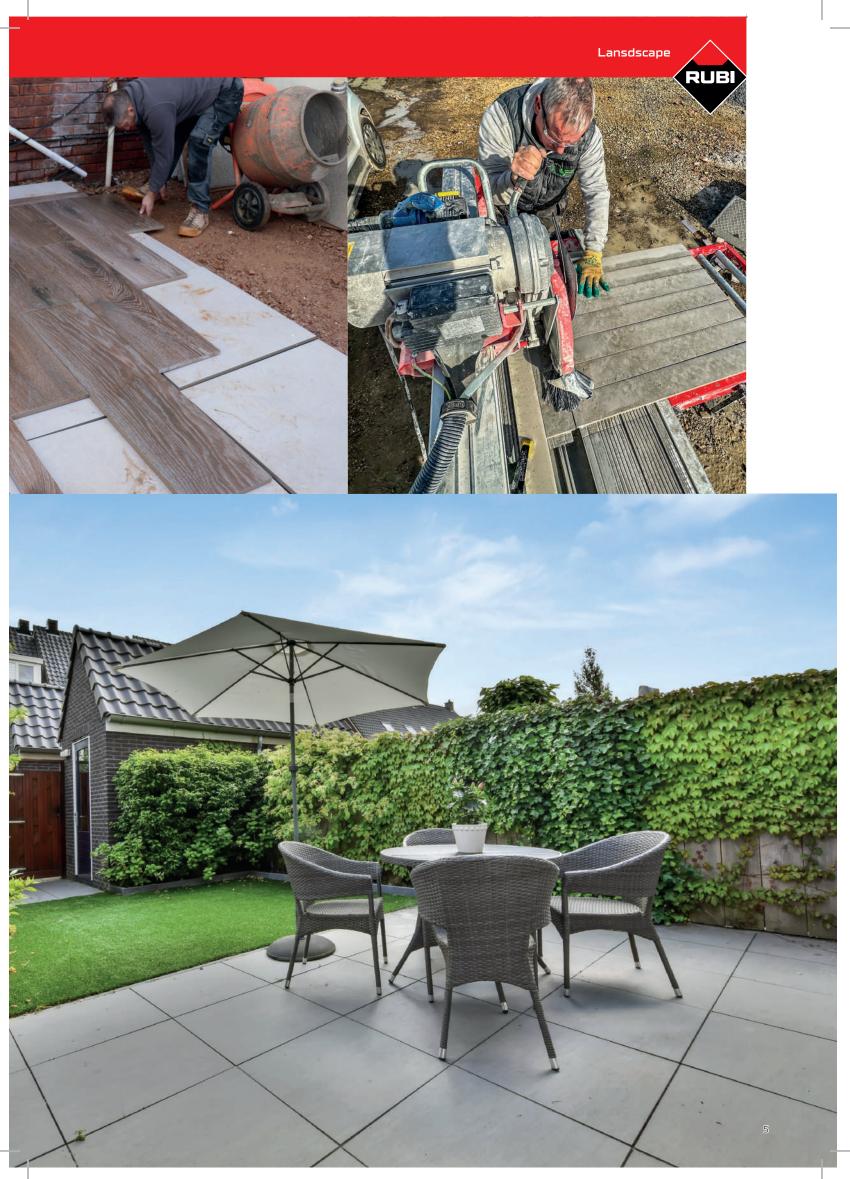



MANUAL TILE CUTTING

Manual Tile Cutters
Scoring wheels and accessories for manual cutters

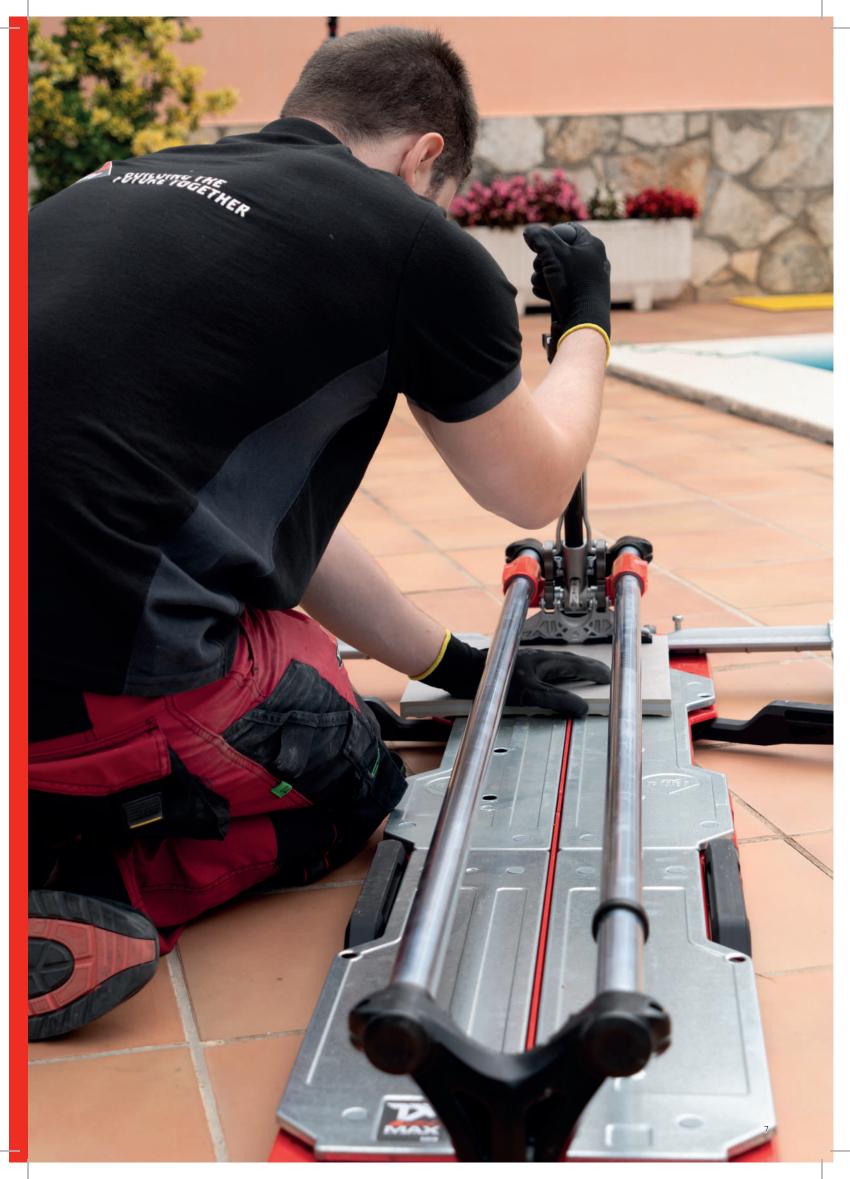





TZ

























For intensive cutting of all types of ceramic tile, ideal for porcelain stoneware and extruded stoneware.





























PATENTED





- · Powerful breaking system (up to 1.500 kg), operable with just one hand.
- · Accurate with soft slider movements.
- · Large cutting capacity, up to 21mm thickness. Ideal for large format tiles*.
- · Robust with a foldable structure for high strength and easy transportation.
- Excellent performance breaking system: Clean cuts with soft motion.
- Robust chassis, guides and breaking system.
- Swivel square with central pivot for fast and accurate measurements in angle cutting.
- · Adjustable lateral stop for repetitive cuts.
- · Support base for excellent tile placement.
- Easy to transport: rubber wheels with bearings and handle.
- Interchangeable scoring wheels ranging from Ø 8mm -22mm.
- Includes Ø 8 mm SILVER and Ø 22 mm EX TREME scoring wheels. Reinforced textile bag for transport and protection.
- On models 1300/1550/1800: The reinforced textile bag of these models includes 2 built-in wheels.







































1		.3.4.5
	Cut & Drill	

	REF.		\longleftrightarrow		and a			=	
TZ-850	17952	٧	85 cm	60x60 cm	3-21 mm	1500 kg	22,4 kg	1	12
TZ-1020	17951		102 cm	70x70 cm			24.6 kg		12
TZ-1300	17953		130 cm	90x90 cm			30 kg		9
TZ-1550	17954		155 cm	110x110 cm			33 kg		6
TZ-1800	17924		180 cm	120x120 cm			36,26 kg		

*Some materials with a thickness greater than 15 mm may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibility and alternatively suggest cutting these types of material using an electric tile cutter.



REF. 18980 Maintenance Kit





TX-MAX





























PROFESSIONAL MANUAL CUTTER WITH HIGH-PERFORMANCE MULTIPOINT BREAKER.

For intensive cutting of all types of ceramic tile, ideal for porcelain stoneware and extruded stoneware.





























- · Highly precise scoring.
- · Entire system highly efficient.
- · Reinforced components. Heavy duty.
- · High breaking power (1,200 kg) MASTER POWER. One-handed operation.
- Head with extra-long aluminium sliders with "self-lubricating" friction bearings.
- · Portable breaker with aluminium pressure pad, equipped with plastic protector to avoid marking delicate surfaces. Better visibility of the scoring and cutting zone.
- · The pressure pad is locked by a ratchet mechanism and is unlocked by the trigger, allowing one-handed scoring and breaking for faster use. Increases performance with both thin and thick materials.
- Injected-aluminium base, reinforced with a central rib, for increased strength.
- · Floating tables and supplementary arms for large-size ceramic tile, increases cutting stability.
- Rotating square, with central pivot point and lateral end stop. Greater precision in angle cuts.
- Handle with soft grip for better ergonomics and comfort.
- Equipped with Ø 8 mm SILVER and Ø 22 mm EXTREME scoring wheels. Compatible with the entire plus line of scoring wheels.
- · Includes a carrying case (the 1250 model is equipped with wheels to transport the machine).









































	REF.		\longleftrightarrow		and a	`	ô	=	
TX-710 MAX	17909		71 cm	50x50 cm			13,3 kg		
TX-1020 MAX	17915	√	102 cm	70x70 cm	3-21 mm	1200 kg	19,4 kg	1	10
TX-1250 MAX	17921		125 cm	85x85 cm			26 kg		

*There are some materials over 15mm thick which, due to their physical properties, possible inner or surface tensions, are difficult to cut manually. It is recommended to make some sample cuts to determine the compatibility of the product.





REF. 18980 Maintenance Kit

































PLUS SCORING WHEELS FOR TZ & TX-MAX PROFESSIONAL CUTTERS.







8MM PLUS SCORING WHEEL (05/16") SILVER

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for smooth and slightly textured surfaces.
- · Tungsten carbide scoring wheel of high resistance and duration.
- Shaft made with a patented geometry for a maximum precision and minimum vibration

	REF.	=	
8MM PLUS SILVER SCORING WHEEL (05/16")	01959	10	3600



8MM PLUS SCORING WHEEL (05/16") ENDURE

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for smooth, textured and highly textured surfaces.
- · Wheel made of tungsten carbide.
- Patented geometry shaft, for maximum precision and minimum vibration.
- Extra-long life.

	REF.	=
8MM PLUS SCORING WHEEL (05/16") ENDURE	01903	10



10MM PLUS SCORING WHEEL (03/8") SILVER

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for smooth and slightly textured surfaces.
- Tungsten carbide scoring wheel of high resistance and duration.
- Shaft made with a patented geometry for a maximum precision and minimum vibration.

	REF.	=	
10MM PLUS SILVER SCORING WHEEL (03/8")	01991	10	3600



18MM PLUS SCORING WHEEL (03/4") SILVER

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for highly textured.
- Tungsten carbide scoring wheel of high resistance and duration.
- Shaft made with a patented geometry for a maximum precision and minimum vibration

	REF.	=	
18MM PLUS SILVER SCORING WHEEL (03/4")	01992	10	3600



22MM SCORING WHEEL PLUS (0 7/8") EXTREME

- For ceramic walls, ceramic floor, porcelain and rustic ceramic floor, ideal for highly textured and structured surfaces.
- Tungsten carbide scoring wheel with a superficial titanium treatment.
- · Mounted on bearing. Enhanced smooth user perception.
- · Extra-long life.

	REF.	=	
22MM SCORING WHEEL PLUS EXTREME (Ø 7/8")	01900	10	-



PATENTED





ACCESSORIES FOR MANUAL TILE CUTTERS







MAINTENANCE KIT

• Cleaning, lubricating & maintenance oil suitable for regular maintaining of cutter parts that are regularly used; guides, sliding system, tilted axes, spiral, metallic surfaces.

	REF.	=	
MAINTENANCE KIT	18980	8	640

CELLULAR CONCRETE SAW

• FOR DIFFERENT TYPES OF BUILDING MATERIALS.







CELLULAR CONCRETE SAW

- · Saw with 29 Tungsten Carbide teeth.
- · Length: 29" (75cm).
- · Beechwood and varnished handle.

	REF.	
CELLULAR CONCRETE SAW	70930	2




































CIRCULAR SAW RAIL CUTTERS

Cutting

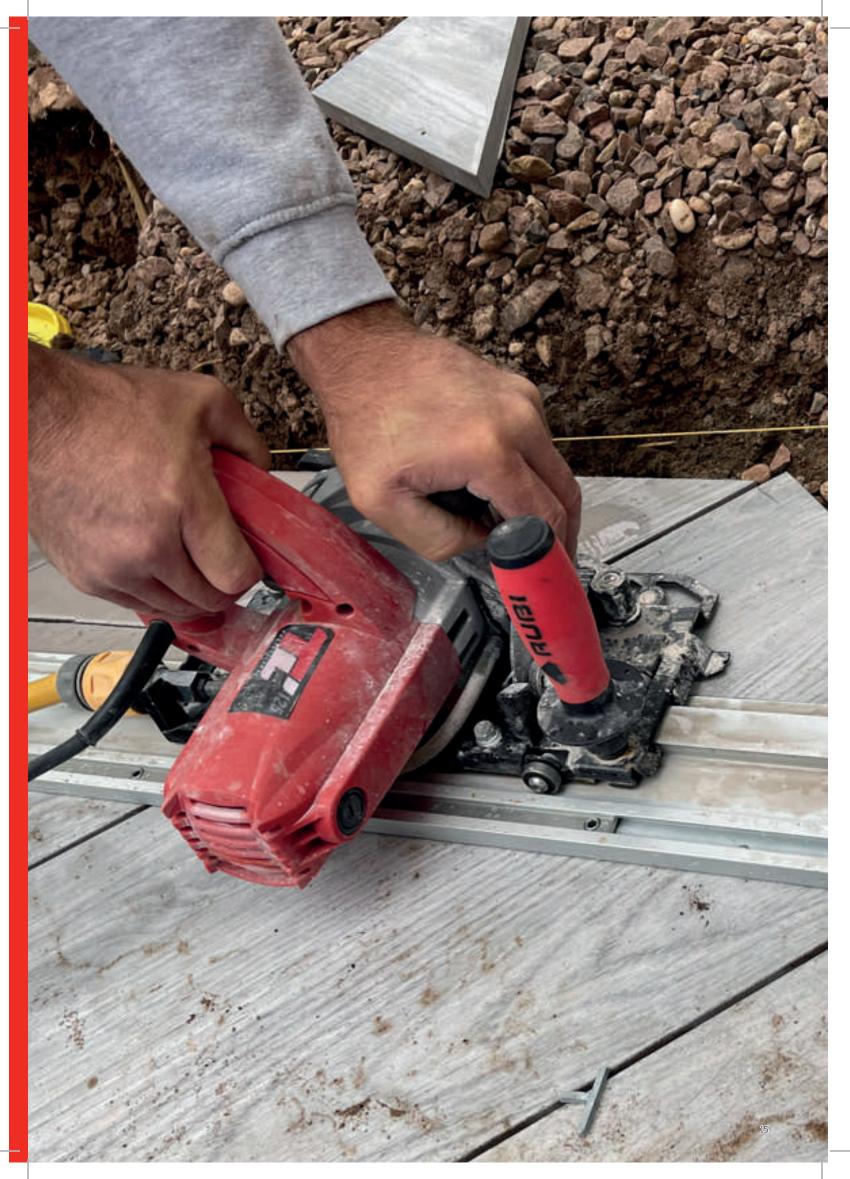





























CIRCULAR CUTTER, SMOOTH AND PRECISE, IDEAL FOR CERAMIC SHEETS.

TC-125 G2 CIRCULAR CUTTER + GUIDES

For cutting all types of ceramic sheets and tiles. Suitable for use with natural and synthetic stone. Especially suitable for large tiles.









DRY AND WET CUT















- · Double dust reduction/control system. Dry and wet cutting.
- · Height-adjustable cutting head (saw effect), hinged from 0° to 45°. (mitre). FAST adjustment system.
- More ergonomic. Additional BI-MATERIAL handle, mainly for mitre cuts.
- · Compatible with discs of 125 or 115 mm diameter. (Suitable for discs with reinforcement plate, TVA type).
- Switch with SAFETY lock. Prevents UNINTENTIONAL start-up. Electrical cable with PRCD.
- Direct connection to vacuum cleaner. Includes adapter for other models and brands (37, 42 and 50 mm diameter).
- Quick connection and regulating valve for hose (16 mm diameter). Rubber stopper for suction outlet. IMPROVES ergonomics during wet cutting.
- · Cast aluminium disc protector with transparent polycarbonate cover with quick opening and closing system. FACILITATES disc change and MINIMISES the projection of particles and water.
- Tilting side guard for mitre cuts. REDUCES water splashing and IMPROVES dust suction.
- The kit of TC-125 + GUIDES KIT TC-125 G2 (necessary) includes: 2 155 cm guides, 1 65 cm guide, 1 TC-125 cutter, 1 Ø125 disc, 2 fixing suction cups, 2 clamps, 2 spacers, 1 vacuum cleaner adapter, 1 carry case and 1 carrying bag.
- · FACILITATES transport and handling.





































	REF.		5	RPM	W	\longleftrightarrow	Suins)	, dillin	Ö	(hor)			=	
KIT TC-125 G2 230V 50/60HZ (Ref: 519!	51+51949	·]											
TC-125 G2 230V 50/60HZ	51951	ا	220-240V 50-60Hz	13800	1250 W	320 cm	20-25 mm	14-18 mm	115-125 mm	22,2 mm	36x24,5x21 cm	14 kg	1	-
GUIDES TC-125 G2	51949	V												
KIT TC-125 G2 230V 50/60HZ L	JK (Ref: !	51967+5 1	949]											
TC-125 G2 230V 50/60HZ UK	51967	.1	220-240V 50-60Hz	13800	1250 W	320 cm	20-25 mm	14-18 mm	115-125 mm	22,2 mm	36x24,5x21 cm	14 kg	1	-
GUIDES TC-125 G2	51949	V												
KIT TC-125 G2 110V 50/60HZ U	KIT TC-125 G2 110V 50/60HZ UK (Ref: 51987+51949)													
TC-125 G2 110V 50/60HZ UK	51987	.1	110-130V 50-60Hz	13800	1250 W	320 cm	20-25 mm	14-18 mm	115-125 mm	22,2 mm	36x24,5x21 cm	14 kg	1	-
GUIDES TC-125 G2	51949	√												

The kit is a cutter reference [Ref.51951 or 51967 or 51987] + the guide reference [Ref.51949]. It must be used with the SLIM SYSTEM G2 guides.

ACCESSOIRES



REF. 51999 Guide supplement G2 155cm **REF.** 52948





REF. 27911 Cart Slim Cutter Plus G2



REF. 50958 Fixing C-clamp








TC-125 G2 CIRCULAR CUTTER

- Requires the use of the SLIM CUTTER G2 guides (refs. 51949, 51999, 52948).
- Equipped with a carbon steel slide on adjustable double set stainless steel radial bearings.
- $\boldsymbol{\cdot}$ Double dust reduction/control system. Dry and wet cutting.
- Height-adjustable cutting head (saw effect), hinged from 0° to 45°. (mitre). Fast adjustment system.
- More ergonomic. Additional bi-material handle, mainly for mitre cuts.
- Includes Ø125 blade and carrying case.

	REF.		5	RPM	W	\longleftrightarrow		, dililin	\bigcirc	(i)			
TC-125 G2	51951		220 2/07/07 /01/-										
TC-125 G2 UK	51967	√	220-240V 50-60Hz	13800	1250 W	320 cm	20-25 mm	14-18 mm	115-125 mm	22,2 mm	36x24,5x21 cm	14 kg	1
TC-125 G2 UK	51987		110-130V 50-60Hz										

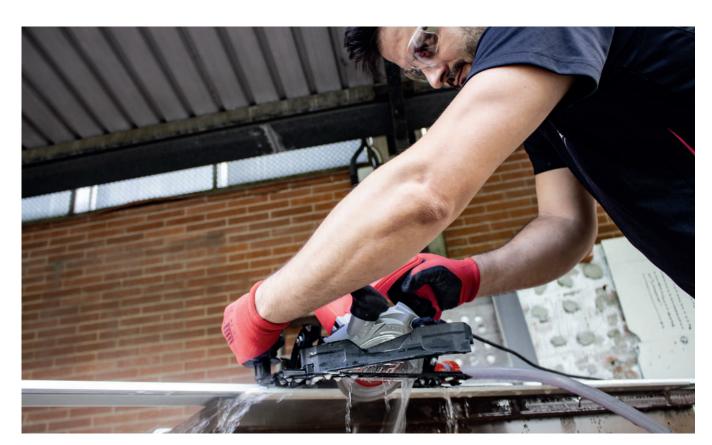





















 $\times \times$









CIRCULAR SAW TC-180

PRECISE CUTTING ON LARGE FORMAT MATERIALS.

For dry and wet cutting of ceramic, porcelain and other materials.





















- · Practical cutter and easy to use for large pieces.
- · Double cooling system, wet and dry. Greater adaptability to environment.
- · Guiding mark for better visibility of the line of cut.
- · Easy adjustment of cutting thickness. Greater versatility and adaptability to the different materials.
- Especially suitable for large pieces.
- · Allows the user to reduce manipulation, handling heavy or akward use.
- · Content:
- Blade Ø180mm TCR-180 SUPERPRO.
- Parallel guide.
- Cable with PRCD switch (differential).
- Cone reducer for vacuum cleaner.
- Transport case.

	REF.		RPM	W	5		O	(-o-)		(\bigcirc		=	
TC-180	50939	√	5800	1800 W	230V / 50-60Hz	55 mm	180 mm	22.2 mm	33x45x38 cm	√	6.7 kg	11 kg	1	10

























































CIRCULAR SAW TC-180 KIT

- · Kit includes:
- 1 x Circular Cutter TC-180 230V 50/60Hz (Ref. 50939), 1 x Blade TCR-180 (Ref. 31975), 2 x Guide 80 cm. for TC-180 (Ref. 50956), 1 x Connector guides (Ref. 50957), 2 x Fixing Clamps (Ref. 50958).

	REF.	=	
TC-180 230V/50-60HZ KIT	50994	1	8









TC-180 GUIDES

- Aluminium Guide for straight cuts.
- · Ability to connect multiple guides through the connector (Ref. 50957).



	REF.			=
80CM GUIDE FOR TC-180 (31 1/2")	50956	82x18.5x2 cm	1.26 kg	1
120CM GUIDE FOR TC-180 (47 1/4")	50959	121x18x2 cm	1.8 kg	1





GUIDE CONNECTOR

· Allows the connection of multiple guides to increase cutting length.



	REF.	=
GUIDE CONNECTOR	50957	1







FIXING C-CLAMP

• Highly recommended for fixing the guide on the tile and preventing movement through out the cut, thus achieving a cleaner cut.

	REF.	=
FIXING C-CLAMP	50958	1

















HANDLING AND INSTALLING

Handling Installing

































FOR TRANSPORTING CERAMIC SHEETS AND LARGE-FORMAT TILES WITH A MAXIMUM RECOMMENDED SIZE OF 150 X 150 CM.





















- · Ideal for medium formats. It adds less weight to the tile conveyor assembly when transporting medium-sized
- · Retractable aluminium guide. Allows us to handle and transport tiles between 100 cm and 210 cm in size. Especially recommended for formats of up to 150 x 150 cm, 6 or 8 mm thick, used diagonally.
- · Highly reinforced, adjustable and removable soft-grip handles. With an anti-twist and soft-grip system which ensures a better grip of the assembly.
- · 2 interchangeable Ø20 cm suction cups, can be placed at any point on the guide.
- Suction cups with a safety indicator.
- Each suction cup, of 20 cm in diameter and with a high-load capacity, has an indicator that warns us in the event of a loss of suction
- The suction cups have a protector to prevent damage during transport.
- · With a maximum load capacity of 40 kg at their maximum length.
- · Maximum load capacity: 55 kg.

	REF.	$\stackrel{\circ}{\bigcirc}$	<u>*</u> \		=
SLAB TRANS MINI	18983	8,3 kg	11,2 kg	231x26x18 cm	1

ACCESSORIES



REF. 16909 SLAB TRANS MINI SUPPORT FOR TABLE




RHINO TROLLEY

TRANSPORT AND HANDLING SYSTEM FOR LARGE TILES.

Easy to transport due to its small size.















- Very manageable and good stability thanks to its 4 wheels. It has a safety lock on the wheels to prevent undesirable movements.
- It can be transported on any type of surface, thanks to its large 160 mm diameter wheels.
- 40 cm wide platform. It can transport tiles and boxes of up to 40 mm thickness.
- · Maximum load capacity 250 kg.
- Rubber cover to protect the tiles.
- Compatible with the transporters.

	REF.		Ċ	=	
RHINO TROLLEY	28912	90x43,4x27,8 cm	10 kg	1	-

























































COMPACT MANUAL BATTERY-POWERED VIBRATOR.

Especially designed for vibrating large-format ceramic sheets.



















- Improves adhesion removing air pockets between substrate and tile.
- · Suitable for use on floor and wall tiling (suitable for vertical and horizontal application, floors and walls).
- Dry laying of concrete slabs and paving stones with polymeric sand and concrete tiles, paving and natural stone on wet cement outdoors..
- Floating carbon steel chassis with vibration reduction system for greater user comfort.
- Folded 1.5 mm steel sheet chassis, powder painted in red.
- $\boldsymbol{\cdot}$ Vibration plate made of PUR plastic, non-marking and easy to change.
- · Easy to operate tool with ergonomic double grip.
- · It has a speed regulator to adapt the vibration to the material and substrate being worked on. It includes a circuit breaker safety system.
- · Powered by a Li-HD 12V 4Ah battery (compatible with 12 V batteries from the Metabo CAS platform).
- · Includes Rubi BMS (Battery Management System), this is a quality electronic controller that protects the battery system from any overloads and overheating. Furthermore, it optimises the performance of the battery by offering a regular energy flow and extends the autonomy of use as well as the battery life.

	REF.	5	RPM			=
RUBI TRILLER ENERGY	10913					
RUBI TRILLER ENERGY UK	10972	12V 4Ah	3000	24,2x29,2x17,9 cm	5,8 kg	1
RUBI TRILLER ENERGY EU	10971	12V 4AH				1
BATTERY CAS LIHD 12V 4AH	85904					






























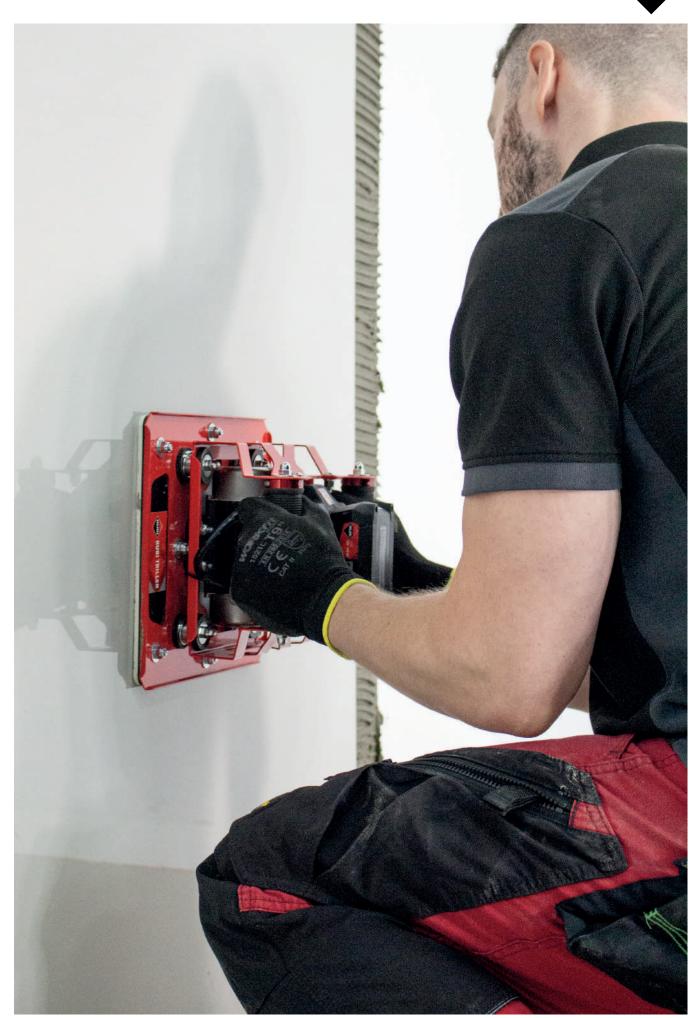





























COMPACT MANUAL VIBRATOR.

RUBI TRILLER

Especially designed for vibrating large format tiles.















- Compact manual vibrator compact thumping system specially designed for Improve adhesion by removing air pockets between substrate and tile.
- Expels the air trapped under the tile and maximises the adhesive coverage. (Do not use for a long period of time on the same tile to prevent the adhesive escaping.)
- · Suitable for use on floor and wall tiles.
- Dry laying of concrete slabs and paving stones with polymeric sand and concrete tiles, paving and natural stone on wet cement outdoors.
- Floating carbon steel chassis with vibration reduction system for greater user comfort.
- Folded 1.5 mm steel sheet chassis, powder painted in red.
- · Vibration plate made of PUR plastic, non-marking and easy to change.
- · Easy to change, non-marking contact plate.
- Easy to operate tool with ergonomic double grip.
- · Non-adjustable vibration frequency.

	REF.	5	RPM			=
RUBI TRILLER	18948	220-230v 50/60Hz	2940	29,2x24,2x18,5 cm	4,8 kg	1



























LIGHT AND COMPACT VIBRATOR

For tiles or porcelain sheets.























- · Designed to prevent the generation of encapsulated air bubbles between the adhesive and the back of the ceramic tile, thus facilitating ideal adhesion between the adhesive and the tile.
- · The low weight and wireless system make it easy to use on vertical supports and work at height.
- The double handle with bi-material handle offers greater ergonomics and comfort to the user, and its geometry facilitates better control and stability of the tool during vibrating.
- The contact base with the ceramic tile does not leave marks and is easily replaceable.
- The front handle improves ergonomics and gives the user a better experience.
- · Powered by CAS Li-lon 18V 2Ah battery, compatible with Metabo brand battery tools and with all those that are part of the CAS 18V platform.
- · It has a progressive on-off switch (rpm control).
- · LED battery-charge indicator.
- New CAS platform LI-POWER 18V-2 Ah battery.

	REF.	5	RPM	\bigcirc	ightharpoons		=
QUAKE ENERGY CAS	60934				1512		
QUAKE ENERGY CAS UK	60942	18V 2Ah	10000 Max	127 mm	1,5 kg	2 kg	1
QUAKE ENERGY CAS WHITOUT BATTERY	60953						
BATTERY CAS LIPOWER 18V 2AH	85901						

OCTO-PLUS ENERGY CAS





























BATTERY-POWERED SUCTION CUP FOR THE HANDLING OF CERAMIC TILES.

Adapts to the surface finish without leaving a mark on the tile.















- · Bi-material and ergonomic handle.
- Powered by CAS Li-Ion 12V 2Ah battery, compatible with Metabo brand battery tools and
- · with all those that are part of the CAS 12V platform.
- LED battery charge level indicator.
- · Maximum load capacity: 150kg.*
- Pressure release mechanism.
- · Load loss indicator (LED).
- In the event of a loss of pressure, the vacuum pump is automatically reactivated until the working pressure is reached again.
- \cdot *only on smooth surfaces and horizontal loading.

	REF.	5		Ĉ	*	=
OCTO-PLUS ENERGY CAS EU	66961	12V 2Ah	200 mm	1 Los	151.4	
OCTO-PLUS ENERGY CAS UK	66975	12V ZAII	200 11111	1 kg	1,5 kg	1
BATTERY CAS LIPOWER 12V 2AH	85903					





INSTALLATION













USB BATTERY



OCTO-USB ENERGY

- · Battery suction cup designed for handling ceramic tiles.
- 3.7V battery integrated in the suction cup and charging via USB-C cable.
- In case of loss of pressure, the vacuum pump is automatically reactivated until it reaches working pressure again.
- Maximum load capacity: 140 kg*
- · Includes transport case.

	REF.	5	\bigcirc				
OCTO-USB ENERGY	66967	3,7 V 1,2 Ah	200 mm	1 kg	1,5 kg	2	

^{*} Only on smooth surfaces and horizontal handling





VACUUM

SECURITY

SUCTION CUP WITH VACUUM PUMP SC-200

- · Suction cup for handling large and heavy tiles.
- · Adapts to surface finish.
- · Suction applied by manual vacuum pump.
- · Load loss indicator (red mark).
- · Pressure-release mechanism.
- · Maximum load capacity: 110kg.
- · Transport carry case.

	REF.	*	=	
SC-200 VACUUM PUMP CUP	18919	1,5 kg	1	90





VACUUM

SECURITY

NO MARKS

GSC-200 VACUUM SUCTION CUP

- Suction cup for the manipulation of largeceramictiles and heavy porcelain slabs.
- · Adapts to the surface without leaving any marks.
- Fixing by vacuum manual pump.
- · Load loss indicator (red mark).
- · Pressure relese mechanism.
- · Maximum load capacity: 110 kg.
- · High resistanceplastic body.
- · Transport carry case.

	REF.		=
GSC-200 VACUUM SUCTION CUP	21951	1,5 kg	1



























ELECTRIC TILE CUTTING

Electric cutters and mitre saws Accessories and Vacuums Cleaner





DX-350 N

facade and fireproof bricks.





















































MOBILE HEAD MACHINE WITH PLUNGE EFFECT FOR TOTAL VERSATILITY.

For all types of ceramic, porcelain tiles and building materials such as marble, granite,



















PREMIUM

Use

INTENSIVE

POWER

VERSATILITY



- · Motor assembly mounted on sliding bearings for maximum precision and reliability. Perfect finishes.
- · Folding legs with integrated castors: Pyramidal orientation to improve the stability and safety of the machine.
- · Aluminium structure. Lighter cutter with maximum resistance to working conditions.
- · High performance plunge effect. Maximum cutting height.
- Equipped with protective safety system for segmented blades.
- · With thermal security switch.
- Water pump cooling of blade with flow control valve.
- · Diamond blade Ø 14" (350 mm) not included.
- Allows the use of a Ø 12" (300 mm) blade.
- · Adjustable mobile head with plunge effect capability.
- Motor on top and belt transmission.
- · With lateral stop for repetitive cuts.
- · Aluminium working surface removable for easy cleaning.
- · Removable water tank system.
- · 2mW line laser.
- · Circular level for easy field installation.
- · Machine supplied without cable.
- $\bullet \ \, \text{Supplied with ZERO DUST system already assembled. Also provided with a second anti-splash standard protector } \\$













	REF.	5	RPM	\longleftrightarrow				x2		\bigcirc		$^{\circ}$	=																																		
DV 750 N 1000	52905	230V-50 Hz.	2800	1025	110 5	075.075					170 0/ 1/7	021-4																																			
DX-350 N 1000	52906	220V-60 Hz.	3400	102,5 cm	118,5 cm	83,5x83,5 cm					170x86x143 cm	92 kg																																			
	52915	230V-50 Hz.	2800				105 105	105,105	10Ev10E cm	/5	10E / 220 mm	35 /	700 750				**1																														
DV 750 N 1700	52916	230V-60 Hz.	3400	177 5	148,5 cm 105x105 cm					105v105 cm	105.105	105 105		105-105	105.105	105105	105105	10Ev10E cm	65 mm	105 / 220 mm	25,4 mm	300-350 mm	300.07.177	1001.4	1																						
DX-350 N 1300	52927	230V-50 Hz. 2,4HP	2830	132,5 cm		148,5 cm 105x105 cm	102X102 CW	102X102 cm	U TOSXIOS CM	102X102 cm	102x102 cm	105x105 cm	,5 cm 105x105 cm	148,5 cm 105x105 cm	3,5 cm 105x105 cm	1 105x105 cm	148,5 cm 105x105 cm	:m 105x105 cm	148,5 cm 105x105 cm	148,5 cm 105x105 cm	8,5 cm 105x105 cm	48,5 cm 105x105 cm	148,5 cm 105x105 cm	148,5 cm 105x105 cm					200x86x143 cm	100 kg																	
	52928	110V-50 Hz.	2700																																												

 $\hbox{\it Cutting capabilities may vary depending on the head position, special plates and disc diameter.}$

Ref. 52927 and 52928: 2,4 CV/HP.

ACCESSORIES

REF. 51916 Tile Fixer DV/DC/DCX/ DS/DX



REF. 51915 Set of flanges 0184mm DX-350



REF. Cables with plug



























DS-250 N



























MOBILE HEAD MACHINE FOR HIGH ACCURACY.

For wall tiles, floor tiles, porcelain tiles, marble, granite and other materials.





































- · Motor assembly mounted on sliding bearings for maximum precision and reliability. Perfect finishes.
- · Folding legs with integrated castors: Pyramidal orientation to improve the stability and safety of the machine.
- · Wheels and handle included. Easy transport.
- · Aluminium structure. Lighter cutter with maximum resistance to working conditions.
- Removable aluminium tables for easy cleaning of the machine.
- · With thermic security switch.
- Water pump cooling of blade with flow control valve.
- · Diamond blade Ø10" (250mm) not included.
- With a double set of flanges, one especially designed for mitre cuts.
- · Motor assembly mounted on sliding bearings for mitre cuts.
- · Safety protector for segmented blades.
- · With lateral stop for repetitive cuts.
- Removable water tank system.
- · 2mW line laser.
- · Circular level for easy field installation.
- · Machine supplied without cable.
- Supplied with ZERO DUST system already assembled. Also provided with a second anti-splash standard protector







































	REF.	5	RPM	\longleftrightarrow					O		$^{\circ}$	★	=	
DS-250 N 1000	52920			102 cm	72x72 cm					170x86x127 cm	91,5 kg	110 kg		
DS-250 N 1300	52930	230V-50 Hz.	2800	132 cm	93,5x93,5 cm	F-1	35	25.4	250	200x86x127 cm	96,5 kg	120 kg		**1
DC 350 N 4500	52940			153	1075 1075	51 mm	25 mm	25,4 mm	250 mm	220.07.127	10012	1751	1	**1
DS-250 N 1500	52942	220V-60 Hz.	3400	152 cm	107,5x107,5 cm					220x86x127 cm	100 kg 125 k	172 KB		

Cutting capabilities may vary depending on the head position, special plates and disc diameter.

Ref. 52945 (3F): 4 CV/HP.

CCESSORIES	
	•

REF. 51916 Tile Fixer DV/DC/DCX/ DS/DX



REF. 51914 Roller Table Extension DU/ DC/DCX/DS/DX (from 2013)



Cables with plug































PROFESSIONAL MOVING HEAD MACHINE FOR WET CUTTING WITH PLUNGE EFFECT.

For occasional cutting of natural stone such as marble or granite.





































- · Reinforced aluminium chassis with innovative triple beam system and steel sides. Improves the stability and rigidity of the chassis.
- · Reinforced cutting guide for a better cut finish.
- · C3-PYTHON System increases cooling efficiency and reduces water dispersion.
- · High performance plunge effect. Cutting height adjustment.
- · Includes transport handle and off-road type reinforced wheels, which provide better transportability and handling of the machine.
- Steel double settling system for improved efficiency and water recovery.
- · Angular measurement with aluminium square adjustable from 0° to 60° for repetitive cuts.
- Includes reinforced folding legs with folding-prevention system and quick lock.
- External and easy to remove water tank with 30 L capacity.
- $\boldsymbol{\cdot}$ Includes improved splash guard system with auto-sliding protective cover.
- Patented ZERO DUST system exclusive to RUBI certified by the TNO, for safe exposure thanks to the reduction of the breathable dust particles generated during the cut.
- Ergonomic bi-material handle for comfortable operation of the cutting head.
- · Earth integrated into the chassis.
- · Does not include power cable.
- · Not supplied with a blade.













1	2	·3·4
	Cut & Drill	

3.4.5

		REF.	5	RPM	\longleftrightarrow			wind)	, dililia	(m)	Ö	Ŏ			<u></u>
	DCX-250 XPERT 1250	52960	230V-50Hz.230V-50Hz.	2750		133 cm	90x90 cm	60 / 90 mm	50	25 /					
		52961	110V-50Hz.	2/30	125 cm						250 mm	78 kg	192x74x130 cm		
		52929	220V-60Hz.	3350											**1
		52970	230V-50Hz.	2750				00 / 90 111111	50 mm	25,4 mm	230 111111			1	
	CX-250 XPERT 1550	52971	110V-50Hz.	2730	155 cm	163 cm	110x110 cm					86 kg	222x74x130 cm		
		52937	220V-60Hz.	3350											

The cutting capacities can vary depending on the head position, special flanges and disc diameter.

ACCESSORIES



REF. 51927 Set of flanges Ø170mm DC PYTHON/DCX



REF. 57941 Table Extension DV/DC/ DCX/DS/DX



REF.Cables with plug





































































MOVING HEAD MACHINE, VERSATILITY AND PRECISION

For cutting porcelain stoneware.







VERSATILITY



























- · Motor assembly mounted on sliding bearings for maximum precision and reliability. Foldable at 45° for mitre. Direct drive motor.
- · Steel plate structure. Sturdy and maximum resistance to working conditions.
- · Patented ZERO DUST system exclusive to RUBI and certified by TNO, for safe exposure because of reduction of respirable dust particles generated during cutting.
- · C3 PYHTON cooling system. New adjustable cooling system. Allows to adjust the point of water's fall depending on the material's thickness, getting a direct impact of the water in the cutting point. This allows to increase the cooling efficiency and to reduce water dispersion.
- · Foldable legs with wheels for an easier transportation and removable tables for easy cleaning of the machine.
- Adjustable aluminium square (0° 60°) with lateral stop for repetitive cuts at 0° and 45°.
- · Safety protector for turbo and segmented blades.
- Blade cooling by water (50W water pump) with flow control.
- · Includes diamond blade CEV-SUPERPRO Ø250 (*Ref. 56949 includes CPA- SUPERPRO Ø250 blade).
- · Supplied without cable.





































	REF.	5	\longleftrightarrow	RPM			x2		<u></u>	0		\bigcirc	★	=	
	56941	230V-50Hz		2790											
DC-250 PYTHON 850	56937	220V-60Hz	85,5 cm	3436	98 cm	69,5x69,5 cm			_		137x59x131 cm	54,5 kg	69,5 kg		
	56938	110V-50Hz		2700			√								
	56939	230V-50Hz.		2790			61/90 mm	55 mm		250 mm				1	**1
DC 350 BYTHON 1300	56943	220V-60Hz.	100	3436	171	05,05			_			E0 EE L.	75.1.2		
DC-250 PYTHON 1200	56947	110V-50Hz.	108 cm	2700	121 cm	85X85 cm					162x82x131 cm	59,55 kg	75 kg		
	56949	230V-50Hz.		2790					√						

The cutting capacities can vary depending on the head position, special flanges and disc diameter.

ACCESSORIES



REF. 57941 Table Extension DV/DC/ DCX/DS/DX



REF. 51914 Roller Table Extension DU/ DC/DCX/DS/DX (from 2013)



REF.Cables with plug



DL-125

























MOBILE HEAD CUTTER, POWERFUL, LIGHT AND TRANSPORTABLE.

Suitable for intensive cutting of porcelain and all kinds of ceramic tiles. Occasional cut of natural stone.































- · 35 cm wide extruded aluminium chassis, ideal for small workplaces.
- · Wheels and handle for easy transport, as well as height-adjustable legs for stability.
- · Equipped with blade adjustment system.
- · Multiple accessories included with the machine.
- Electric machine with cutting effect.
- Motor set mounted on bearings for maximum precision and reliability.
- 1800W (2.4CV) universal motor.
- 125mm diamond blade included (cutter compatible with 115-130mm blades).
- · Reinforced aluminium chassis (double beam system). Improves the stability and rigidity of the chassis.
- · Safety protection system for Blades.
- Equipped with ZERO DUST system.
- · Removable water tank for easy cleaning (8L).
- · Ergonomic transport and adjustment improvements (motor adjustment, support adjustment, carriage wheel adjustment).
- · Accessories included: Double lateral extension, repetitive cuts, laser and lateral stop for repetitive cuts included (adjustable from 8mm to 20mm tiles).
- The machine is supplied without cable.

































The cutting capacities can vary depending on the head position, special flanges and disc diameter.



























DT-250 MAX

TRANSPORTABLE ELECTRIC CUTTER WITH MITRE EFFECT. GOOD FINISH.

For cutting stoneware, tiles, ceramics, refractories and other materials.









FAST

















- · Python cooling system combined with the Zero Dust system, keeps your work area clean by reducing the production of splashes.
- It incorporates a tubular steel support with wheels and foldable, to transport the machine easily.
- · With lateral stop for repetitive cuts with adjustment from 0° to 45° and magnetic support for the blade key.
- · Diamond blade for fast, smooth cuts with a long service life.
- · Laser indicator to facilitate ceramic placement and obtain more precise cuts.
- Tilting cutting head adjusts for precise 22.5° and 45° bevel cuts.
- Tank with level indication min. and max. Maximum capacity: 19 l.
- It incorporates an aluminium table with a rubber surface with a cutting capacity of 90 cm.
- · Available accessory Ref. 58916 that extends the table up to 120 cm.

















































	REF.	5	RPM	\longleftrightarrow				(···	O		Ů	=	
DT-250 MAX	58909	220/240 V - 50/60 Hz											
DT-250 MAX UK	58915	7 ZZU/Z4U V - SU/OU HZ	4000	90 cm	60 cm	90 mm	25 mm	25,4 mm	250 mm	160x935x123 cm	45 kg	1	-
D1-230 MAX UK	58913	110/130 V - 50/60 Hz											

The cutting capacities can vary depending on the head position, special flanges and disc diameter.





REF. 58916 EXTENDABLE TABLE DT -250 MAX



REF. 58917 Set of flanges for DT-250 MAX









DR-350

ELECTRIC SAW WITH PLUNGE EFFECT.

For all types of building materials like: masonry bricks, facade bricks, fireproof bricks, marble, granite and ceramic tiles.









































- · Head with high performance plunge effect. Large cutting capacity.
- · Equipped with ZERO DUST system. Tested and certified by TNO.
- · Large table for a larger work surface and comfort.
- · Steel structure robustness. Increased resistance to the demands of intensive work.
- Equipped with protective safety system for segmented blades.
- With thermal protector.
- · Adjustable head to 45°.
- Large table 23 1/16"x19 1/2" (58.5x49.5cm).
- Blade cooling by water pump with integrated regulation valve.
- · Diamond blade Ø12-14" (300-350mm) not included.
- Machine supplied without cable.
- · Supplied with new ZERO DUST system already assembled. Also provided with a second anti-splash standard protector.



 $\times \times$





































The cutting capacities may vary depending on the position of the head, special flanges and disc diameter.



REF. Cables with plug



REF. 5973 Cleaning Block



REF. 5974 N-Cleaning Block

































ACCESSORIES FOR ELECTRIC CUTTERS



 \sqrt{n}





CLEANING BLOCK

· For cleaning of diamond blades.

	REF.	=
CLEANING BLOCK	05973	5

SUPERPRO



N-CLEANING BLOCK

• Specifically designed to bring back the diamonds on the rim of diamond blades when cutting porcelain.

	REF.	=
N-CLEANING BLOCK	05974	5

SUPERPRO



SET OF FLANGES FOR MITRING CUTS.

- · To reduce saw flex in miter cuts.
- · Available in several models.
- · Flange for reinforced saws.

	REF.	=
SET OF FLANGES 0184MM DX-350	51915	
SET OF FLANGES 0170MM DC PYTHON/DCX	51927	1
SET OF FLANGES 0130MM DV/DC/DCX/DX-250	57991	1
SET OF FLANGES FOR DT-250 MAX	58917	

SUPERPRO



TABLE EXTENSION

- Increases work surface for large format tiles. 23 5/8"(600x280mm).
- · Maximum weight: 33Lb, (15kg).
- · Compatible with various models of cutting machines.

	REF.	=
TABLE EXTENSION DV/DC/DCX/DS/DX	57941	1

SUPERPRO



TILE FIXER DV/DC/DCX/DS/DX

- · Allows the fixing of the tile during cutting, thus avoiding sudden movements.
- · Accessory adaptable to DV,DC,DS and DX series (up to 2009).

	REF.	
TILE FIXER DV/DC/DCX/DS/DX	51916	1



ROLLER TABLE EXTENSION

- · With rollers to simplify movement of the tiles.
- · With adjustable foldable legs.
- Work surface 26 9/16"x22 5/8" (675x575mm) and maximum weight 154lb (70kg).
- · Installation on both sides of the machine.

	REF.	=
ROLLER TABLE EXTENSION DU/DC/DCX/DS/DX [FROM 2013]	51914	1







EXTENDABLE TABLE DT - 250 MAX

- For better grip of large tiles with a cutting capacity of up to 120 cm.
- Exclusive for DT -250 MAX.
- Extendable legs included to prevent tipping of the support.
- Main table manufactured in aluminium with a rubber layer.
- Guides manufactured in extruded aluminium with reinforcing cross-bars.

	REF.	=
EXTENDABLE TABLE DT – 250 MAX	58916	1



ADJUSTABLE LENGTH LATERAL STOP DC/DCX/DS/DX

- · For fixing large format tiles.
- · Adjustable to the maximum length of electric cutter.
- Tile is held laterally thus avoiding any movement.
- Especially suitable for blocking and execution of repetitive miter.

	REF.	=
ADJUSTABLE LENGTH LATERAL STOP DC/DCX/ DS/DX	54844	1



LATERAL STOP FOR DC/DCX/DS/DX

• Facilitates positioning of the tile, while reducing the percentage of errors.

	REF.	=
LATERAL STOP FOR DC/DCX/DS/DX	54822	1







LASER & LEVEL KIT DV/DC/DCX/DS/DX

- · Kit includes:
- Circular bubble level to facilitate proper positioning of the electric cutter.
- Laser Tracer indicating the passage of the disc and facilitates placement of material.
- · Laser power: 2 mW
- · Laser Class: 2
- · Not compatible with DC-250 PYTHON models.

	REF.	=
LASER & LEVEL KIT DV/DC/DCX/DS/DX	54999	1





CABLES WITH PLUG

- For machines supplied without cable, please include both the reference of the machine and the reference of the correct voltage cable with plug which is suitable for the Country of destination.
- · Approximate length 3.5m.

Approximate length 3.5m.	REF.	5	=
CABLE WITH PLUG 230/50 EUR	58850	230V - 50 Hz.EUR	
CABLE WITH PLUG 380/50 EUR	58851	380v-50 Hz.EUR	
CABLE WITH PLUG 110/50 UK	58852	110v-50 Hz.UK	1
CABLE WITH PLUG 230/50 UK	58853	230V-50 Hz.UK	
CABLE WITH PLUG 230/50 10A AUS	58863	230v - 50 Hz. 10A AUSTR.	

















XX









































WET AND DRY VACUUMING WITH THE SAME MACHINE AND SPECIFIC ACCESSORIES FOR OPTIMISATION.

For dry and wet extraction work in areas where very fine dust is generated by cutting, such as hardwood, paint, plastics, cement and brick (type M dust).













- · Autoclean system that automatically shakes the filter.
- M- Class certified, it vacuums up 99.9% of airborne particles, including wood (hard and soft), plaster, plasterboard, Corian, paint, plastics, cement and brick.
- Power socket for automatic start and stop in synchronisation with the tool being used (2000 W max.).
- · Metal wheels reinforced with rubber and with an optimum radius for moving on uneven ground.
- · Agile and compact. 20L tank and an extra-long handle.
- · Included:
- · Blue anti-foam filter for vacuuming liquids.
- · 3-metre suction hose.
- Extendable plastic tube.
- two multifunctional brush bases.
- Brush for hard floors.
- Brush for working with liquids.
- Flat nozzle for corners.
- · Rubber adapter.
- · Consumables included:
- · Included three bags.
- M- Class polyester cartridge filter.

	REF.	5			=
RUBI CLEAR DUST EXTRACTOR M	51941	230V-50Hz.	(00, (00, (00,	101.4	1
RUBI CLEAR DUST EXTRACTOR M UK	53500	110V-50Hz.	400x400x600 cm	10 kg	1

ACCESSORIES



REF. 51997 RUBI CLEAR DUST EXTRACTOR BAG (5 UN)



REF. 51989 RUBI CLEAR DUST EXTRACTOR FILTER



REF. 52947 CLEAR VACUUM CLEANER WET FILTER









RUBI CLEAR DUST EXTRACTOR BAG (5 UN)

- Filter bag for M-Class dust extraction.
- Designed specifically for the Clear vacuum cleaner.
- Closure designed for proper waste management and subsequent sealing (regulated in the cleaner's M-Class certification).
- Pack of 5 units.
- IFA certification.

REF.	=
51997	1





○ PREMIUM

RUBI CLEAR DUST EXTRACTOR FILTER

- Filter for dry vacuuming and M- Class filtration.
- · Specifically designed for the Clear vacuum cleaner.
- IFA certification.

	REF.	=
RUBI CLEAR DUST EXTRACTOR FILTER	51989	1





○ PREMIUM

CLEAR VACUUM CLEANER WET FILTER

- Filter for wet vacuuming.
- Specifically created for the Clear vacuum cleaner.
- Created to protect the motor.

	REF.	=
CLEAR VACUUM CLEANER WET FILTER	52947	1





























































VACUUM ADAPTABLE TO ELECTRIC MACHINES

To vacuum wet or dry.















- · For wet and dry vaccuming.
- Power: 1400 W.
- Airflow: 58 I / s.
- · Vacuum: 180 mbar. (18 psi.)
- · Capacity: 30 I.
- Double switch: On / Off and automatic start.
- Socket for electric tool (max.2000W)
- Electrical cable: 4 m.
- · Accessories included:
- Hose, nozzle (35/37 mm) and crevice tool.
- Steel pipes.
- Wet brush.
- Filter damp sponge for wet.
- HEPA filter for dry.

	REF.	5		=	
AS-30 PRO VACUUM CLEANER	50962	210-240V/50-60 Hz	64x38x38 cm	1	9

ACCESSORIES



AS-30 PRO Vacuum Cleaner Paper Bag.



REF. 50998 AS-30 PRO Vacuum Cleaner Dry Filter



REF. 50999 AS-30 PRO Vacuum Cleaner Wet Filter.










AS-30 PRO VACUUM CLEANER PAPER BAG.



- · Compatible with AS-30 PRO.
- · Biodegradable.
- 4 units set.

	REF.	=
AS-30 PRO VACUUM CLEANER PAPER BAG.	50964	1





AS-30 PRO VACUUM CLEANER DRY FILTER

- HEPA filter for dry vacuuming.
- · Compatible with AS-30 PRO.
- Minimum particle size: 5 μm .

	REF.	=
AS-30 PRO VACUUM CLEANER DRY FILTER	50998	1





AS-30 PRO VACUUM CLEANER WET FILTER.

- Filter for wet vacuuming.
- Compatible with AS-30 PRO.
- · 2 units set.

	REF.	- W
AS-30 PRO VACUUM CLEANER WET FILTER.	50999	1





























DIAMOND BLADES

Dry cutting diamond blades Wet cutting diamond blades







DRY CUT

























WITHOUT NEED OF WATER FOR COOLING.







SUPERPRO	PORCELANIC	EXTRA LONG LIFE	FAST	LANDSCAPING

PORCELAIN TILES DIAMOND BLADE 2CM (TLG)

- Specially designed for landscaping materials.
- · Ideal for dry cutting porcelain, ceramic, natural stone and sintered stone materials of > 20 mm with a grinder.
- · A great combination. High performance and cutting speed with high-quality

	REF.	Ŏ		·		RPM	<u></u>
TLG 115 EXT SUPERPRO	41900	115 mm		1/		13300 max.	_
TLG 125 EXT SUPERPRO	41901	125 mm	22.2 mm	1.4 mm	10 mm	12250 max.	٥



SUPERPRO	UNIVERSAL	GENERAL CONSTRUCTION	ALL TERRAIN 4X4

GENERAL PURPOSE SEGMENTED DIAMOND BLADE (STT)

- $\boldsymbol{\cdot}$ Recommended blade for cutting all types of building materials, included Reinforced concrete. High performance and speed of cutting.
- For cutting materials > 25 mm thickness.

	REF.	\bigcirc	Q	(*)		RPM	<u>-</u>
STT 115 SUPERPRO	30974	22.2	115 mm	22	10	13300 max.	5
STT 230 SUPERPRO	30976	22,2 mm	230 mm	2,2 mm	10 mm	6650 max.	1



◆ PRO	UNIVERSAL	GENERAL CONSTRUCTION	HEAVY DUTY	FAST

GENERAL PURPOSE SEGMENTED DIAMOND BLADE (SEV)

- Recommended for cutting building materials such as brick, concrete, terrazzo.
- The fastest. Maximum speed and best blade's cooling. To cut materials with more than 1" (25 mm) thickness.
- Perforated steel blade to improve cooling and diminish cut's tensions.

	REF.	O	(in)	(*)		RPM		
SEV 115 PRO	25915	115 mm		1/	1/		13300 max.	_
SEV 125 PRO	32940	125 mm	22,2 mm	1,6 mm	8 mm	12250 max.		
SEV 230 PRO	25916	230 mm		2,3 mm		6650 max.	1	







 (\circ)



◆ PRO UNIVERSAL GENERAL CONSTRUCTION VERSATILE

GENERAL PURPOSE TURBO DIAMOND BLADE (TSV)

- Recommended for cutting building materials such as bricks, concrete, terrazzo.
- $\boldsymbol{\cdot}$ A great combination. High performance and cutting speed with high standard finishes.

	REF.	O		·		RPM	=
TSV 115 PRO	25917	115 mm	777	2 mm	8 mm	13300 max.	5
TSV 230 PRO	25918	230 mm	22,2 mm	2,5 mm	8 111111	6650 max.	1



-			
SUPERPRO	HARD MATERIAL	HEAVY DUTY	EACT
- JUPERPRU	HARD MAIERIAL	HEAVY DUTY	FAJI


HARD MATERIALS TURBO DIAMOND BLADE VIPER (TVR)

- Recommended blades to cut hard materials such as granite, slate, quartzite, rustic tiles, klinker and porcelain tile.
- Robust blade, ready to support high tensions in the extremes of the blade.
- For cutting materials > 3/4" (20 mm) thickness.
- · High cutting speed.
- · Reinforced blade.
- · Is suitable for miter cuts.

	REF.	\bigcirc	(i)	·		RPM	-
TVR 115 SUPERPRO	30986	115 mm	22.2	1/	10	13300 max.	_
TVR 125 SUPERPRO	30987	125 mm	22,2 mm	1,4 mm	10 mm	12250 max.	j j







• The specific design of the diamond band offers greater speed of cutting harder materials without sacrificing finish quality.

• Only for straight cuts, not suitable for mitering.

	REF.	O		\odot		RPM	=					
TVA 115 SUPERPRO	31932	115 mm	- 22,2 mm -								13300 max.	F
TVA 125 SUPERPRO	31933	125 mm		1,4 mm	10	12250 max.	5					
TVA 180 SUPERPRO	31934	180 mm		22,2 mm	1/	10 mm	8500 max.	3				
TVA 230 SUPERPRO	31935	230 mm		1,6 mm		6650 max.	1					



▲ SUPERPRO	HARD MATERIAL	LONG LIFE	FAST

HARD MATERIALS SEGMENTED DIAMOND BLADE "CANTERO" (SCA)

- Recommended for cutting high hardness natural stones such as granite, basalt, quartzite, concrete drive, etc.
- · Long life and high performance. Bar of 12 mm.
- · High speed cutting.
- For cutting materials > 25 mm thickness.

	REF.	O		\odot		RPM	=
SCA 230 SUPERPRO	30904	230 mm	22,2 mm	3 mm	12 mm	6650 max.	1

































PORCELANIC

FAST

PORCELAIN TILES TURBO DIAMOND BLADE (TCR)

- · Recommended blade to cut fine porcelain tiles.
- High performance and fast cutting speed with high quality finishes.

	REF.	O		•		RPM	
TCR 115 SUPERPRO	31972	115 mm	22,2 mm -	1/	8 mm	13300 max.	5
TCR 125 SUPERPRO	31973	125 mm		1,4 mm		12250 max.	
TCR 180 SUPERPRO	31975	180 mm		1,6 mm		8500 max.	3
TCR 230 SUPERPRO	31978	230 mm		2 mm		6650 max.	1



SUPERPRO

PORCELANIC

GOOD FINISH

PORCELAIN TILES CONTINUOUS RIM DIAMOND BLADE (CPR)

- Recommended blade to cut fine porcelain tiles with less than 3/4" (20 mm) thickness.
- · The best finish.

	REF.	Q	\bigcirc	(<u>*</u>)		RPM	[=]
CPR 115 SUPERPRO	30972	115 mm	22.2 mm	4.7		13300 max.	_
CPR 125 SUPERPRO	30973	125 mm	22,2 [[[[[]	1,7 mm	8 mm	12250 max.	٥





PORCELANIC

FAST

GOOD FINISH

PORCELAIN TILES J-SLOT DIAMOND BLADE (CPJ)

- For cutting hard porcelain tiles with the best performance.
- · Specially recommended for straight cuts and high speed cutting.
- \cdot Thanks to J-Slot typology, this disc increases cutting speed on very hard porcelain tiles, while reducing the stresses generated throughout out the cut.
- It's original design is for dry cutting, but also allows wet cutting.

	REF.	O	(i)	<u>•</u>		RPM	=
CPJ 125 SUPERPRO	32933	125 mm	22,2 mm	1,4 mm	8 mm	12250 max.	5



SUPERPRO

ABRASIVE

FAST

ABRASIVE MATERIALS SEGMENTED DIAMOND BLADE (SON)

• Recommended blades to cut abrasive materials such as bricks, calcareous terrazzo, marble, sandstone.

	REF.	\bigcirc	€ ••	<u>•</u>		RPM	=
SON 230 SUPERPRO	32908	230 mm	22,2 mm	2,6 mm	8 mm	6650 max.	1



SUPERPRO

MARBLE

FAST

MARBLE ELECTROPLATED DIAMOND BLADE (EMG)

- Recommended electroplated diamond blade to cut marble, limestone and fibers.
- · Less vibration. To cut those materials with high risk of breaking, as marble and fibers.

	REF.	O	$\bigcirc\!$	\bigcirc		RPM	=
EMG 115 SUPERPRO	30995	115 mm	22,2 mm	2,2 mm	3 mm	13300 max.	5











METAL, PLASTIC, WOOD

FAST

DIAMOND BLADE RESCUE (RSQ)

- $\boldsymbol{\cdot}$ Recommended disc for cutting all types of materials including metal, plastic and wood, and more.
- · Vacuum Brazed Technology.
- $\boldsymbol{\cdot}$ Increased resistance to high temperatures during cutting, reduction of spark generated.
- · High speed and performance.

	REF.	\bigcirc		·	(i)	RPM	=
RSQ 115 SUPERPRO	30900	115 mm	22.2	2,8 mm	/	13300 max.	5
RSQ 230 SUPERPRO	30902	230 mm	22,2 mm	3,0 mm	4 mm	6650 max.	1







NO VIBRATIONS

QUALITY FINISH

DIAMOND CUTTING & GRINDING (ECD)

- For cutting and grinding soft natural stone and ceramic tiles and synthetic materials.
- For adjustment cuts and grinding on all types of porcelain and hard materials.
- For cutting materials > 3/4" (20 mm) thickness.
- · Electroplated continous rim blade.
- Two-sided and reversible blade for a better performance.
- For grinders use. Connection: M14 thread.

	REF.	O		\odot		RPM	-
ECD 115 2IN1 SUPERPRO	31964	115 mm	M14 mm	1.0	-	13300 max.	_
ECD 125 2IN1 SUPERPRO	31965	125 mm	14 111111	1,8 mm	5,6 mm	12250 max.	7







HARD MATERIAL

EXTRA LONG LIFE

FAST

DIAMOND CUTTING & GRINDING (TGS)

- Disc for dry finishing cutting and fine grinding.
- For use with porcelain materials and natural stone.
- A great combination. High performance and cutting speed with high-quality finishes.
- · Suitable for use with a grinder.

	REF.	\bigcirc	(in)	\odot		RPM	=
TGS 115 SUPERPRO	40917	115 mm	22.2 mm	1,6 mm	25 mm	13300 max.	- 5
TGS 125 SUPERPRO	40918	125 mm	22,2 111111			12250 max.	























































· COOLED WITH WATER.









SUPERPRO	PORCELANIC	LANDSCAPING	LONG LIFE	VERY FAST

PORCELAIN TILES DIAMOND BLADE 2CM SUPERPRO (SPL)

- · Specially designed for landscaping materials.
- Ideal for cutting porcelain, ceramic, natural stone and sintered stone materials of > 20 mm.
- Segmented
- Due to the diamond rim's special alloy, these types of materials can be cut quickly and have an extra-long life.
- Good finish

	REF.	Ö	⊕	<u>•</u>		RPM	=
SPL 250 EXT SUPERPRO	40910	250 mm	JE /	1,6 mm	10 mm	6150 max.	,
SPL 300 EXT SUPERPRO	40911	300 mm	25,4 mm			5100 rpm.	1



PORCELAIN TILES PREMIUM 2CM DIAMOND BLADE (SPT)

- For cutting all types of ceramic, porcelain and natural stone materials.
- For cutting thicknesses from 20 mm to 35 mm.
- Joint by laser welding.
- Extra-long life.
- Suitable for use on cutting tables and cut-off machines that incorporate guard systems in compliance with the standard for use of segmented blades.
- · Special bonded alloy that provides a good finish with a very fast cutting speed.

	REF.	Q		(·)		RPM	<u>-</u>
SPT 250 EXT PREMIUM	32934	250 mm		2.2 mm 25.4 mm		6150 max.	
SPT 300 EXT PREMIUM	32935	300 mm	25.4 mm		10 mm	5100 max.	1
SPT 350 EXT PREMIUM	32936	350 mm		2.4 mm		4400 max.	













UNIVERSAL

GENERAL CONSTRUCTION

FAST

GENERAL PURPOSE SEGMENTED DIAMOND BLADE (SHR)

- Recommended for cutting building materials such as brick, concrete, terrazzo.
- The fastest. Maximum speed and best blade's cooling. To cut materials with more than 1" (25 mm) thickness.

	REF.	©	(+o+)	•		RPM	
SHR 250 PRO	32974	250 mm		2,6 mm		6150 max.	
SHR 350 SUPERPRO	32971	350 mm	25,4 mm	3 mm	10 mm	4400 max.	1





◆ PRO

UNIVERSAL CERAMIC

GOOD FINISH

CERAMIC TILES CONTINUOUS RIM DIAMOND BLADE (CEV)

- Blade for general cut of ceramic tiles as wall tile, floor tiles, porcelain.
- \cdot The best finish. To cut and mitre ceramic tiles and other stone coating materials with less than 3/4" (20 mm) thickness.

	REF.	\bigcirc		•		RPM	
CEV 250 SUPERPRO	30949	250 mm	25.4			6150 max.	1
CEV 300 SUPERPRO	30950	300 mm	25,4 mm	2,2 mm	10 mm	5100 max.	







HARD MATERIAL

GOOD FINISH

HARD MATERIALS CONTINUOUS RIM DIAMOND BLADE (CPA)

- Recommended for cutting hard materials such granite, rustic tiles, klinker, firebricks or slate
- The best finish. To cut and mitre ceramic tiles and other stone coating materials with less than 3/4" (20 mm) thickness.

	REF.	O		•		RPM	=
CPA 250 SUPERPRO	30929	250 mm		77	8 mm	6150 max.	
CPA 300 SUPERPRO	30930	300 mm	25,4 mm	2,2 mm	10	5100 max.	1
CPA 350 SUPERPRO	30931	350 mm		2,6 mm	10 mm	4400 max.	





SU 🌰	PI:	П	PR	0

HARD MATERIAL

FAST

GOOD FINISH

HARD MATERIALS TURBO VIPER DIAMOND BLADE (TVH)

- Recommended blade for cutting hard materials such as granite, rustic tiles, clinker, refractory, slate, quartzite and porcelain tile.
- The specific design of the diamond band offers greater speed of cutting harder materials without sacrificing finish quality.
- For cutting materials > 3/4" (20 mm) thickness.
- Only for straight cuts, not suitable for mitring.

	REF.	O		·		RPM	=
TVH 250 SUPERPRO	31937	250 mm				6150 max.	
TVH 300 SUPERPRO	31938	300 mm	25,4 mm	2 mm	10 mm	5100 max.	1
TVH 350 SUPERPRO	31939	350 mm		2,4 mm		4400 max.	









































 \bigcirc







 $\times \times$












PORCELANIC

GOOD FINISH

PORCELAIN TILES CONTINUOUS RIM DIAMOND BLADE (CPC)

- \cdot Recommended blade to cut fine porcelain tiles with less than 3/4" (20 mm) thickness.
- · Specially recommended for mitre cutting.

	REF.	Ö	(+o+)	<u>•</u>		RPM	=
CPC 250 PRO	30959	250 mm	25.4	77	8 mm	6150 max.	1
CPC 300 PRO	30960	300 mm	25,4 mm	2,2 mm	10 mm	5100 max.	1



◆ PRO	PORCELANIC	FAST	GOOD FINISH

PORCELAIN TILES J-SLOT DIAMOND BLADE (CPX)

- · Recommended disc to cut fine porcelain tiles.
- · High Tech. High speed on straight cuts on porcelain tiles.

	REF.	\bigcirc		·		RPM	
CPX 200 PRO	30964	200 mm				7650 max.	
CPX 250 PRO	30962	250 mm	25,4 mm	1,6 mm	8 mm	6150 max.	1
CPX 300 PRO	30963	300 mm				5100 max.	



SUPERPRO	ABRASI
-----------------	--------

LONG LIFE

ABRASIVE MATERIALS TURBO DIAMOND BLADE (TON)

- Recommended blades to cut abrasive materials such as bricks, calcareous terrazzo, marble, sandstone.
- A great combination. High performance and cutting speed with high standard

	REF.	Q		\bigcirc		RPM	=
TON 250 SUPERPRO	31909	250 mm	25,4 mm	2,5 mm	7,5 mm	6150 max.	1





DRILLING

Tools for drilling ceramic tile, stoneware, marble, granite and other materials.









Ó

















DIAMOND DRILL BITS - DRY CUT

FOR DRY DRILLING OF WALL TILES, FLOOR TILES AND PORCELAIN TILES.



















SUPERPRO	PORCELAIN TILE	⊕ GRINDER	PELECTRIC DRILL WITHOUT PERCUSSION

DRYGRES DRILL BITS

- For dry drilling in ceramic, porcelain, natural stone and other materials.
- · Maximum operating speed 14,000 r.p.m. M14 thread finish.
- $\cdot \text{ They can be used both with grinders or drill without hammer, using the included adapter kit. } \\$
- Usable with grinder. Supplied in blister.

	REF.	RPM		=
DRYGRES DRILL BIT Ø 1/4" (6 MM.)	05988			
DRYGRES DRILL BIT Ø 2/7" (7 MM.)	05994			
DRYGRES DRILL BIT Ø 5/16" (8 MM.)	05989	14000 max.		
DRYGRES DRILL BIT 0 3/8" (10 MM.)	05990	14000 1118X.		
DRYGRES DRILL BIT 0 1/2" (12 MM.)	05991			
DRYGRES DRILL BIT 0 3/4" (20 MM.)	04910			
DRYGRES DRILL BIT 0 1" (25 MM.)	57903	14000		
DRYGRES DRILL BIT 0 1 1/8" (28 MM.)	04911			
DRYGRES DRILL BIT 0 1 3/8" (35 MM.)	04912			
DRYGRES DRILL BIT Ø 1 3/4" (43 MM.)	04913		36 mm	1
DRYGRES DRILL BIT Ø 2" (50 MM.)	04914	14000 max.		
DRYGRES DRILL BIT 0 2 3/8" (60 MM.)	04915	14000 1118X.		
DRYGRES DRILL BIT 0 2 1/2" (65 MM.)	04916			
DRYGRES DRILL BIT Ø 2 11/16" (68 MM.)	04917			
DRYGRES DRILL BIT 0 3" (75 MM.)	05992			
DRYGRES DRILL BIT 0 3 1/8" (80 MM.)	57904			
DRYGRES DRILL BIT 0 3 1/4" (85 MM.)	57906	14000		
DRYGRES DRILL BIT 0 4" (100 MM.)	57907	14000		
DRYGRES DRILL BIT 0 4 3/4" (120 MM.)	57908			









KIT MINI DRYGRES

- Dry cutting diamond drill bits for drilling porcelain tiles, glazed tiles, natural stone and other ceramics.
- They can be used both with grinders or drill without hammer, using the included adapter kit.
- Kit includes: Drill Ø 1/4"(6 mm). 5/16"(8 mm). 3/8"(10 mm) and 1/2"(12 mm). case.

	REF.	RPM		- W
KIT MINI DRYGRES	50938	14000 max.	36 mm	1















ELECTRIC DRILL WITHOUT PERCUSSION

KIT DRYGRES

- They can be used both with grinders or drill without hammer, using the included adapter kit.
- The kit includes:
- MULTIDRILL guide with carry case. Ref.50917, Ref.50936, Ref.50996
- · Dry cutting diamond drill bits:
- Ø1 1/8"(28mm), 1 3/8"(35mm), 1 3/4"(43mm) & 2 11/16"(68mm).
- Ø11/8"(28mm), 13/8"(35mm), 13/4"(43mm), 2"(50mm) & 211/16"(68mm).
- Ø1/4"(6mm), 5/16"(8mm), 3/4"(20mm), 13/8"(35mm), 50 & 211/16"(68mm).

	REF.	RPM		
KIT 4 BITS DRYGRES	50917			
KIT 5 BITS DRYGRES	50936	14000 max.	36 mm	1
KIT 6 BITS DRYGRES	50996			



















○ PREMIUM PORCELAIN TILE CEXTRA LONG LIFE STRINDER WITHOUT PERCUSSION

DRYGRES PREMIUM DRILL BITS

- Designed for the fast drill of any kind of ceramic tiles including porcelain, but also suitable to drill natural stone as granite or marble, and sintered stone.
- Vacuum brazed type drill bits that provides a very fast dry drilling with very good quality
- Resistant brazed of diamond grits and great quality materials for extra long life.
- \cdot Integrated wax only in the smallest diameters (6 12 mm) to help cooling and lubrication during drilling.
- Side openings for better cooling due greater air circulation in biggest diameters (20 85 mm).
- Air cooled through the own rotation but also recommended to describe small orbital movements with the tool to help cooling.
- They can be used both with grinders or drill without hammer, using the included adapter kit.

	REF.	RPM		=
DRYGRES PREMIUM DRILL BITS 0 6 MM.	06900			
DRYGRES PREMIUM DRILL BITS 0 7 MM.	06915			
DRYGRES PREMIUM DRILL BITS 0 8 MM.	06918			
DRYGRES PREMIUM DRILL BITS Ø 10 MM.	06919		70 mm	
DRYGRES PREMIUM DRILL BITS Ø 12 MM.	06929		30 mm	
DRYGRES PREMIUM DRILL BITS 0 20 MM.	06971			1
DRYGRES PREMIUM DRILL BITS 0 28 MM.	06972			
DRYGRES PREMIUM DRILL BITS 0 35 MM.	06973	14000		
DRYGRES PREMIUM DRILL BITS 0 43 MM.	06974			
DRYGRES PREMIUM DRILL BITS 0 50 MM.	06975			
DRYGRES PREMIUM DRILL BITS 0 60 MM.	06976			
DRYGRES PREMIUM DRILL BITS 0 65 MM.	06977		38 mm	
DRYGRES PREMIUM DRILL BITS 0 68 MM.	06978			
DRYGRES PREMIUM DRILL BITS Ø 75 MM.	06979			
DRYGRES PREMIUM DRILL BITS 0 85 MM.	06980			

























 Image: Control of the control of the









KIT DRYGRES PREMIUM

- They can be used both with grinders or drill without hammer, using the included adapter kit.
- · The kit includes:
- MULTIDRILL guide with carry case. Ref.51931, Ref.51937, Ref.51929
- · Dry cutting diamond drill bits:
- · Ø1 1/8"(28mm), 1 3/8"(35mm), 1 3/4"(43mm) & 2 11/16"(68mm).
- Ø1 1/8"(28mm), 1 3/8"(35mm), 1 3/4"(43mm), 2"(50mm) & 2 11/16"(68mm).
- Ø1/4"(6mm), 5/16"(8mm), 3/4"(20mm), 13/8"(35mm), 2"(50mm) & 211/16"(68mm).

	REF.	RPM	=
KIT 4 DRILL BITS DRYGRES PREMIUM	51931		
KIT 5 DRILL BITS DRYGRES PREMIUM	51937	14000	1
KIT 6 DRILL BITS DRYGRES PREMIUM	51929		



○ PREMIUM	PORCELAIN TILE	EXTRA Long Life	⇔ GRINDER	P ELECTRIC DRILL WITHOUT PERCUSSION

KIT MINI DRYGRES PREMIUM

- Dry cutting diamond drill bits for drilling porcelain tiles, glazed tiles, natural stone and other ceramics.
- They can be used both with grinders or drill without hammer, using the included adapter kit.
- · Kit includes:
- Drill Ø 1/4"(6 mm), 5/16"(8 mm), 3/8"(10 mm) and 1/2"(12 mm).
- Case.

	REF.	RPM	=
KIT MINI DRYGRES PREMIUM	51939	14000	1





SUPERPRO	PORCELAIN TILE	LONG LIFE	CORDLESS POWER DRILL

DRYGRES DRILL BITS 4DRILL

- Specially designed for dry drilling in porcelain stoneware. Suitable for other ceramic materials, natural stone and artificial stone.
- With high resistant welding of the diamond grains for a longer duration.
- "Easy-Start" Without slipping. Suitable for work without a centering guide.
- · Perfect for cordless drills (1000 2500 rpm).
- Reinforced body with grub screw for better performance and rigidity, thus maintaining the wax on the tip of the drill (no wax \varnothing 28 & \varnothing 35 mm models) .
- · High quality finish.
- designed to be used exclusively with either a cordless drill onr an electric drill.
- Their hexagonal connection allows them to adapt quickly to drills with a 10 mm chuck.

	REF.	RPM		=
DRYGRES DRILL BITS 4DRILL 0 1/4" (6 MM.)	05923			
DRYGRES DRILL BITS 4DRILL 0 5/16" (8 MM.)	05924		36 mm	
DRYGRES DRILL BITS 4DRILL 0 3/8" (10 MM.)	05926	1000 '-		
DRYGRES DRILL BITS 4DRILL 0 1/2" (12 MM.)	05927	1000 min.		1
DRYGRES DRILL BITS 4DRILL 0 9/16" (14 MM.)	05928			1
DRYGRES DRILL BITS 4DRILL 0 3/4" (20 MM.)	05929		40 mm	
DRYGRES DRILL BITS 4DRILL 0 1 1/8" (28 MM.)	05970	3000:-		
DRYGRES DRILL BITS 4DRILL Ø 1 3/8" (35 MM.)	05971	2000 min.		






SUPERPRO PORCELAIN TILE LONG LIFE CORDLESS POWER DRILL

KIT DRYGRES 4DRILL

- $\boldsymbol{\cdot}$ For dry drilling in porcelain stoneware. Suitable for other ceramic materials, natural stone and artificial stone.
- ${\boldsymbol{\cdot}}$ Hexagonal connection Compatible with battery drills.
- Kit composed of:
- $\boldsymbol{\cdot}$ DRYGRES 4DRILL diamond drills dry cut Ø 6, 8, 10 and 12 mm.
- · With case.

	REF.	RPM	
KIT DRYGRES 4DRILL	05939	1000 min.	1

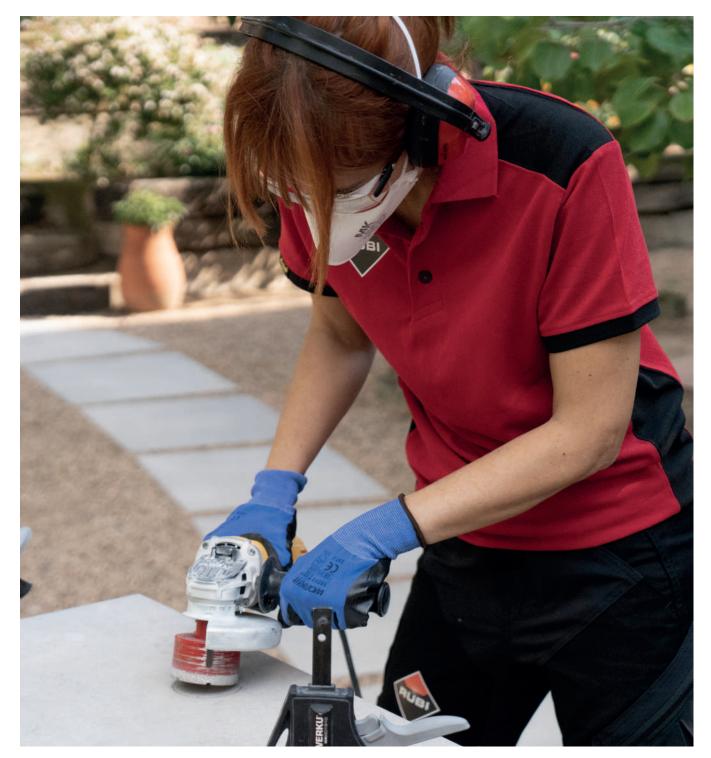

































MATERIALS.











































DIAMOND DRILL BITS - WET CUT



· FOR WET DRILLING OF WALL TILES, FLOOR TILES, PORCELAIN AND OTHER



₱ ELECTRIC DRILL
WITHOUT PERCUSSION

FORAGRES DRILL BITS 0 13/16" TO 4 3/4" (20 - 120 MM.)

- To drill floor tiles, porcelain tiles, granite and marble.
- · Always use cooled with water and non-hammer electric drill.
- \cdot Ø 15/8" (40 mm.) drill bit, designed for housing of toilet flushing mechanisms. Supplied in blister.

	REF.	RPM		=	
FORAGRES DRILL BIT 3/4" (20 MM.)	04970				
FORAGRES DRILL BIT 1 1/8" (28 MM.)	04971				
FORAGRES DRILL BIT 1 3/8" (35 MM.)	04972		30 mm		
FORAGRES DRILL BIT 1 5/8" (40 MM.)	04963	900 max.		1	
FORAGRES DRILL BIT 2" (50 MM.)	04973	YUU IIIAX.			
FORAGRES DRILL BIT 2 1/2" (65 MM.)	04974				1
FORAGRES DRILL BIT 2 11/16" (68 MM.)	04918				
FORAGRES DRILL BIT 3" (75 MM.)	04975				
FORAGRES DRILL BIT 4" (100 MM.)	04976	/F0	70		
FORAGRES DRILL BIT 4 3/4" (120 MM.)	04977	450 max.	30 mm		







₱ ELECTRIC DRILL WITHOUT PERCUSSION

KIT FORAGRES

- Kit includes:
- · MULTIDRILL Guide.
- · Tank and hose.
- Diamond drill bits Ø 3/4", 11/8", 13/8", 13/4", 2" and 2 11/16" (Ø 20, 28, 35, 43, 50, 68 mm).
- · Case.

	REF.	RPM		=
KIT FORAGRES	50903	900 max.	30 mm	1











MULTIDRILL GUIDE

- $\boldsymbol{\cdot}$ By fixing with suction cup, allows horizontal and vertical holes in the right place, preventing the drill bit from slipping.
- Compatible with all Rubi diamond drill bits, Ø 6 to 83 mm.
- · Includes hose and tank connection (Ref. 50947).

	REF.	=
MULTIDRILL GUIDE	50944	1





MULTIDRILL PLUS RM GUIDE

- By fixing the guide with the suction cup, allows horizontal and vertical holes in the correct place, preventing the drill bit from slipping on any type of surface: smooth, rough or slightly structured.
- Compatible with all Rubi diamond drill bits, Ø 6 to 120 mm.
- · Metal centering guide for greater wear resistance.
- Includes hose and tank connection (Ref. 50947).

	REF.	=
MULTIDRILL PLUS GUIDE RM (MAX. Ø 120 MM)	51908	1





TANK FOR MULTIDRILL GUIDE

- Bottle of 1200 ml. volume, with manual pressure pump.
- Includes 2 m. hose.

	REF.	=
TANK AND HOSE FOR MULTIDRILL GUIDE	50947	1



























GRINDING & POLISHING

Bevelling, Grinding wheels and blades. Polishing pads.






































PROFESSIONAL PORTABLE SYSTEM FOR INTENSIVE USE, ESPECIALLY DESIGNED FOR DRY BEVELLING AND MITRING PRINCIPALLY OF LARGE FORMAT TILES.

It can be el and mitre porcelain, ceramic and any natural stone material of any length.

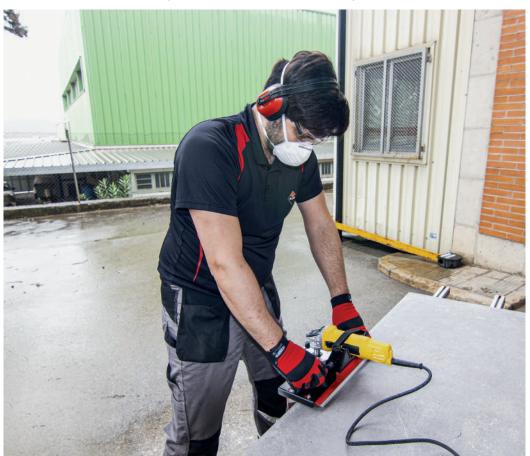












- · It makes mitre cuts at 45° up to a maximum thickness of 20 mm, and with no thickness limitation for bevelling.
- · Progressive bevelling and mitring at different depths to prolong the useful life of the grinding wheel and make bevelling easier for the user.
- · Compatible with 115 & 125mm angle grinders with cable or battery that are easily and safely fitted thanks to the joint made with an M14 threaded shaft and quick-fastening belt.
- · Sealed high-speed bearings, to prevent the ingress of dust generated during the bevelling or mitring.
- · Highly wear-resistant polyethylene slides.
- A vacuum cleaner can be easily fitted for dust extraction (ZERO-DUST).
- · Quick and simple grinding wheel change.
- · Chassis with carbon steel sheet.
- Highly friction-resistant white polyethylene slides
- · Plastic handle.
- · Sealed single-row deep-groove ball bearings.
- 45° x 20 mm grinding wheel included (ref. 16946).
- · PVC plastic grinding wheel guard.
- Fixing to angle grinder by means of a Ø14mm (Ref. 16956) and 5/8"-11" (Ref. 16901) and quick fastening belt.
- Progressive wear bevelling and mitring is adjustable by 10 mm.
- · A damp cloth is recommended for cleaning.
- · Lubrication is not necessary.





























	REF.				€••			*		
PRO-EDGER PORTABLE BEVELING	16956	V	∞ cm	20 mm	M14 mm	38x21x17 cm	4,1 kg	4,5 kg	1	24

ACCESSORIES



REF. Fine Grit PRO-EDGER mitring Wheel



REF. Turbo Twist Coarse Grit PRO-EDGER mitring Wheel



REF. Fine Grit PRO-EDGER bevelling Wheel







 $\times \times$









ACCESSORIES FOR BEVELLING AND MITRING



































GOOD FINISH

FINE GRIT PRO-EDGER BEVELLING WHEEL

- · Grinding wheel for bevelling.
- Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS.
- Recommended use between 9,000 12,000 rpm to achieve greater durability of the wheel.
- Round finish available on 5 and 10 mm radius.
- · Internal diameter: 16.1 mm (M16 thread).
- For exclusive use with PRO-EDGER.

	REF.	O	(m)	<u></u> :	RPM	
FINE GRIT R.5 PRO-EDGER BEVELLING WHEEL	16957	66 mm	M16 mm	6 mm		1
FINE GRIT R.10 PRO-EDGER BEVELLING WHEEL	16958	76 mm	MITO IIIIII	11 mm	12000 max.	











GOOD FINISH

FINE GRIT PRO-EDGER MITRING WHEEL

- · Grinding wheel for mitring.
- Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS.
- Recommended use between 9,000 12,000 rpm to achieve greater durability of the wheel.
- 45° type tool with 1-2 mm edge.
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-EDGER.

	REF.	\bigcirc		 :	RPM	
45X20 SMOOTH FINE GRIT PRO-EDGER MITRING WHEEL	16946	94 mm	M1/	20 mm	- 12000 max.	1
45X15 SMOOTH FINE GRIT PRO-EDGER MITRING WHEEL	16985	84 mm	M16 mm	15 mm		









FAST

TURBO TWIST COARSE GRIT PRO-EDGER MITRING WHEEL

- · Grinding wheel for mitring.
- Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS.
- \cdot Recommended use between 9,000 12,000 rpm to achieve greater durability of
- The TURBO TWIST model can be used for grinding before finishing with a fine grit, as its grooved design can chip the tile profile.
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-EDGER.

	REF.	\bigcirc	(in)	11111	RPM	-
TURBO TWIST COARSE GRIT PRO-EDGER MITRING WHEEL 45X15	16984	84 mm	M16 mm	15 mm	12000 max.	1





GRINDING WHEELS













CONCRETE DOBLE ROW GRINDING CUP

- Grinding cup with double row of sintered segments for grinding and edge finishing on concrete surfaces.
- Laser welding. Coarse grinding finish. Heavy-Duty steel core.
- · For GRINDERS use.
- Maximum perimeter speed: 15.300 RPM (Ref. 05917) and 12.250 RPM (Ref. 05918).

	REF.	\bigcirc	(in)			RPM	-
GRINDING CUP WHEEL CONCRETE DOUBLE ROW 0100	05917	100 mm	22.2	/	19 mm	15300 max	1
GRINDING CUP WHEEL CONCRETE DOUBLE ROW 0125	05918	125 mm	22,2 111111	6 mm	19 mm	12250 max	1







CONCRETE FAN GRINDING CUP

- Fan shaped grinding cup with sintered segments for fast grinding and edge finishing on concrete surfaces.
- · Laser welding. Coarse grinding finish. Heavy-Duty steel core.
- · For GRINDERS use.
- Maximum perimeter speed: 15.300 RPM (Ref. 05919) and 12.250 RPM (Ref. 05920).

	REF.	\bigcirc	(in)	:		RPM	=
GRINDING CUP WHEEL CONCRETE FAN CUP 0100	05919	100 mm	22.2	5 mm	27.5	15300 max	1
GRINDING CUP WHEEL CONCRETE FAN CUP 0125	05920	125 mm	22,2 mm		Z,c mm	12250 max	





STONE GRINDING CUP

- Turbo sintered grinding cup for grinding and edge finishing on natural stone surfaces.
- Laser welding. Coarse grinding finish. Heavy-Duty steel core.
- For GRINDERS use.
- Maximum perimeter speed: 15.300 RPM (Ref. 05919) and 12.250 RPM (Ref. 05920).

	REF.	\odot		 :		RPM	=
GRINDING CUP WHEEL TURBO STONE 0100	05921	100 mm	M14 mm	7 mm	19,5 mm	15300 max	1





EPOXY-FIBRE GRINDING CUP

- PCD grinding cup for fast removal of epoxy, paint, acrylics or other elastic coatings.
- High frequency welding. Heavy-Duty steel core. Medium grinding finish.
- For GRINDING use.
- · Maximum perimeter speed: 12.250 RPM.

	REF.	\bigcirc	(in)			RPM	
GRINDING CUP WHEEL EPOXY, FIBRE, PCD 0125	05922	125 mm	22,2 mm	2 mm	10,5 mm	12250 max	1





































QUALITY FINISH

DIAMOND CUTTING & GRINDING (ECD)

SUPERPRO

• For cutting and grinding soft natural stone and ceramic tiles and synthetic materials.

NO VIBRATIONS

- For adjustment cuts and grinding on all types of porcelain and hard materials.
- For cutting materials > 3/4" (20 mm) thickness.
- Electroplated continous rim blade.
- Two-sided and reversible blade for a better performance.
- For grinders use. Connection: M14 thread.

	REF.	\bigcirc	€ •••	•		RPM	
ECD 115 2IN1 SUPERPRO	31964	115 mm	M14 mm	10 mm	E 4 mm	13300 max.	E
ECD 125 2IN1 SUPERPRO	31965	125 mm	MT4 [][]]	1,8 mm	5,6 mm	12250 max.	٥




♠ SUPERPRO	HARD MATERIAL	EXTRA LONG LIFE	FAST

CUTTING & GRINDING BLADES (TGS)

- Disc for dry finishing cutting and fine grinding.
- For use with porcelain materials and natural stone.
- · A great combination. High performance and cutting speed with high-quality
- · Suitable for use with a grinder.

	REF.	Q		·		RPM	=
TGS 115 SUPERPRO	40917	115 mm	22.2	1/	35	13300 max.	_
TGS 125 SUPERPRO	40918	125 mm	22,2 mm	1,6 mm	25 mm	12250 max.	ב

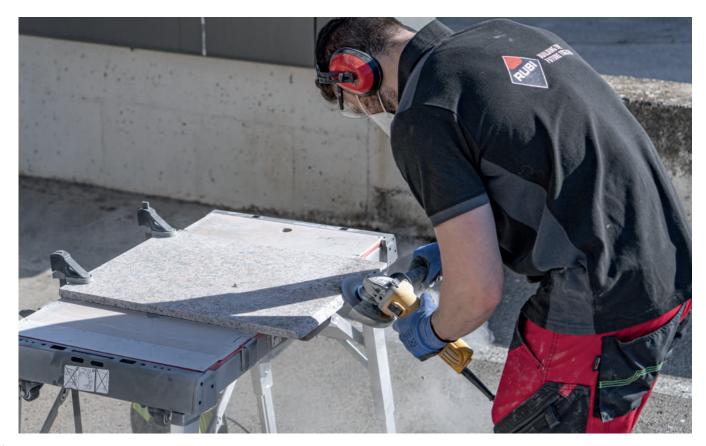



FLAP DISCS



















PORCELAIN TILE

FAST

GOOD FINISH


LONG LIFE

DIAMOND FLAP DISCS

- $\boldsymbol{\cdot}$ For grinding ceramic, porcelain, sintered stone and natural stone.
- Fast grinding with a long life due to the ratio of diamond concentration to diamond grit spacing.
- Excellent for mitres and bevels.
- · Ideal for edge and surface grinding.
- It comes with an aluminium M14 ADAPTER for use with the grinder to reduce vibrations and provide better stability during work.
- Electroplated.
- Dry and wet grinding.
- · Very good finish.

	REF.	O	RPM	Ů	=
DIAMOND FLAP DISC 50/60 COARSE GRIT 0115	32921				
DIAMOND FLAP DISC 100/120 MEDIUM GRIT 0115	32927	115 mm	10500	0,42 kg	1
DIAMOND FLAP DISC 200 FINE GRIT 0115	32931				
DIAMOND FLAP DISC 50/60 COARSE GRIT 0125	32937				
DIAMOND FLAP DISC 100/120 MEDIUM GRIT 0125	32938	125 mm	9650		
DIAMOND FLAP DISC 200 FINE GRIT 0125	32939				



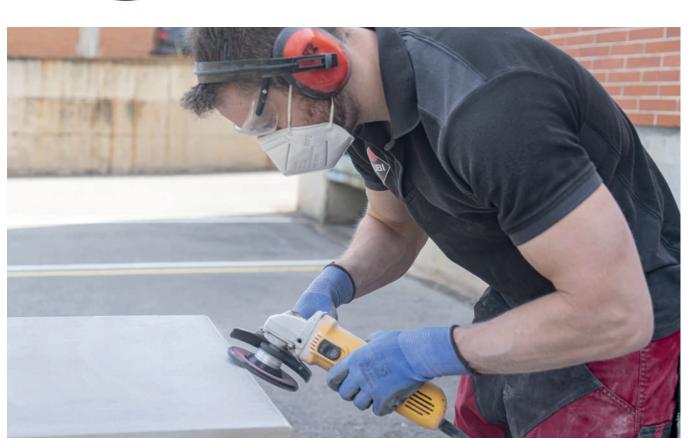





























GRINDING & POLISHING

















GRINDING BLADES

- · VACUUM BRAZED embossed plate.
- For edges and surfaces grinding of natural stone, all kind of ceramic tiles and paint or resin coatings.
- For GRINDERS use.
- · Maximum recommended speed: 15,300 RPM.
- · Fine grinding finish (Ref.31974).
- · Coarse grinding finish (Ref.31979).

	REF.	\bigcirc	€	\bigcirc		RPM	=
VDF 100 FINE PRO	31974	100	777	2,1 mm	77	15700	1
VDG 100 COARSE PRO	31979	100 mm	22,2 mm	2,4 mm	23 mm	15300 max	1



GRINDING CUTTERS









ROUND GRINDING CUTTERS

- \cdot For round edge grinding on porcelain, natural stone and landscaping materials.
- These cutters can easily produce bevels on worktops, steps, swimming pool coping, tree surrounds, kerbs, etc.
- For use with a grinder with M14 fitting.
- · Diamond fixed by means of a vacuum brazing process.

	REF.	Q	RPM	simple .	*	-
FULL BULL NOSE	52938	50 mm	14000 max.	20 mm	0,46 kg	1



SUPERPRO	PORCELAIN TILE	QUALITY FINISH	LONG LIFE	LANDSCAPING
-----------------	----------------	----------------	-----------	-------------

BULLNOSE GRINDING CUTTERS

- For round-edge grinding on porcelain, natural stone and landscaping materials.
- These cutters can easily produce bevels on skirting, steps, worktops, swimming pool coping, etc.
- For use with a grinder with M14 fitting.
- · Diamond fixed by means of a vacuum brazing process.

	REF.	O	RPM	anine)	*	=
HALF BULL NOSE	52939	50 mm	14000 max.	20 mm	0,44 kg	1



















▲ SUPERPRO | ■ PORCELAIN TILE | LONG LIFE GOOD FINISH LANDSCAPING

BULLNOSE GRINDING CUTTERS

- Suitable for working with natural stone and porcelain.
- To enlarge or modify the diameter and shape of a previously made hole.
- · Can also be used for smoothing, polishing or cleaning the interior edges of these
- $\boldsymbol{\cdot}$ For dry use with M14 thread grinders.
- High diamond quality and concentration for a long useful life.
- Diamond fixed by means of a vacuum brazing process.
- Provides a good finish thanks to its #50-60 grit size.
- ${\boldsymbol \cdot}$ Stable performance with minimum deviation.
- $\boldsymbol{\cdot}$ The diamond grinding bits ARE NOT SUITABLE for making holes.

	REF.	RPM		*	
CYLINDRICAL BIT 0 10 MM	06984			0.10 kg	
CYLINDRICAL BIT 0 20 MM	06985	11000	50 mm	0.15 kg	
CONICAL BIT Ø 2-35 MM	06986	11000 max.	35 mm	0.12 kg	1
CONICAL BIT Ø 20-48 MM	06987		32 mm	0.26 kg	



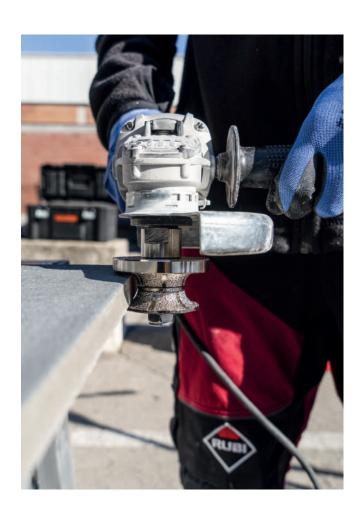





































POLISHING PADS



































SUPERPRO NATURAL STONE

DRY POLISHING DIAMOND PADS

• Range of floppy discs Ø100 mm for polishing, dry, of concrete, marble, granite and other ornamental natural stones.

QUALITY FINISH

- It allows removing scratches and surface damage quickly and easily.
- · Maximum operating speed: 3,000 rpm.
- · Different granulometry.
- # 50, # 100 and # 200 for roughing.
- # 400, # 800, # 1500 and # 3000 polishing and close the pore.
- · VELCRO® fastening blade to holder ref. 62986.

	REF.	Q	=
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN # 50	62970		
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #100	62971		
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #200	62972		
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #400	62973	100 mm	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #800	62974		
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #1500	62975		
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #3000	62976		







NATURAL STONE

QUALITY FINISH

DRY DIAMOND POLISHING PAD BUFF BL.

- \cdot Ø100 mm floppy disc for the final buffing, dry, of concrete, marble, granite and other ornamental natural stones.
- · Get a natural and long-lasting shine
- · Maximum operating speed: 3,000 rpm.
- · VELCRO® fastening blade to holder ref. 62986.

	REF.		-
DRY DIAMOND POLISHING PAD 0100 MM BUFF BL.	62977	100	1





PAD SUPPORT FOR POLISHING AND BUFFING

- Fixing brackets for flexible polishing and buffing blades Ø100 mm.
- · Compatible with jobs dry and water-cooled.
- · VELCRO fastening.
- · Connection polisher / grinder with M14 thread.

	REF.	\bigcirc	=
SUPPORT FLOPPY PAD 0100MM M14	62986	100 mm	1







GRINDING & POLISHING











MANUAL POLISHING PADS

- Range of diamond rubber pads for roughing and edge polishing, cutting and surfaces of natural stone and ceramic tile.
- Semi-flexible. Good adaptation to the user's hand.
- · Wet use is recommended.
- · Different grain sizes:
- # 60, # 120 and # 200 for roughing.
- # 400 for polishing.
- Dimensions of the diamond plate: 55x90 mm.
- · Rubber pad dimensions: 58x94x30 mm.

	REF.	
DIAMOND POLISHING PAD GRAIN # 60	RAIN # 60 61974	
DIAMOND POLISHING PAD GRAIN #120	61975	10
DIAMOND POLISHING PAD GRAIN #200	61976	10
DIAMOND POLISHING PAD GRAIN #400	61977	































MIXING

Electric mixers Mixing paddles



























FREEDOM OF MOVEMENT.

For cementitious adhesives, resins, paints and other materials.

RUBIMIX E-10 ENERGY CAS















- · Brushless motor. Maintenance-free and increases the product's lifespan. Maximum efficiency.
- · Powered by a CAS Li-lon 18V 5.2Ah battery pack, compatible with METABO cordless tools and all of those that form part of the CAS 18V platform.
- · Light and strong. Maximum reliability.
- · Dual bi-material grip handle. Better ergonomics, comfort and stability.
- · Equipped with a 2-speed gearbox.
- Progressive switch (RPM control) to optimise the mixing of each material.
- · Switch safety lock prevents unintentional start-up.
- · LED battery-charge indicator.
- · Connection to mixing paddles with M14 thread and FAST-IN adapter (included).
- · Double-insulated motor.
























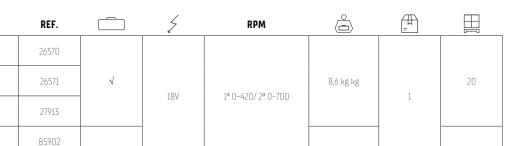

XX

ACCESSORIES

RUBIMIX E-10 ENERGY CAS EU

RUBIMIX E-10 ENERGY CAS UK

RUBIMIX E-10 ENERGY CAS NO BAT/CHARG.

BATTERY RUBIMIX E-10 CAS 18V 5.2AH



18V

REF. Mixer Paddles FAST-IN 3HELIX



REF. RUBIMIX buckets





























POWERFUL MULTIPURPOSE ELECTRIC MIXER, SUITABLE FOR CEMENTITIOUS ADHESIVES, RESINS, PAINT, AND OTHER MATERIALS.

Facilitates a homogeneous mixing of materials, avoiding the formation of bubbles and/or lumps.



















- · High power 2100W.
- · Electronic speed controller (rpm regulation) to optimize the mixing of each material.
- · Equipped with 2 speeds gearbox (490/880 rpm).
- · Mixing paddles connection through exclusive RUBI FAST-IN head for fast paddle change.
- Greater electrical safety thanks to double isolation.
- · Easy and intiutive use.
- · Attractive and functional design.
- · Ergonomic bi-material handle with improved grip that provides greater. Comfort & stability.
- · Chassis in technical plastic, light & resistant.
- · Maximum reliability & durability.
- · Anti-ignition security system. Prevents inadvertent start-up.
- · Soft start system
- Ø140mm triple helix mixing paddle included (M14 thread continuous full rod)for mortar and cementitious adhesives.
- Direct access to engine sbrushes for a fast and easy maintenance. Spare brushes and 19 & 22 mm keys included.
- · Available version with carrying case (ref.26981).
- · Compatible with drill holder and RUBI mixing paddles range.























ACCESSORIES	4	REF. Mixer Paddles FAST-IN 3HELIX	REF. RUBIMIX buckets







 $\times \times$

























RUBIMIX-9 SUPERTORQUE

VERSATILE ELECTRIC MIXER, SUITABLE FOR CEMENTITIOUS ADHESIVES, RESINS, PAINTS AND OTHER

Facilitates homogeneous mixing of the materials and prevents the creation of bubbles and/or lumps.















- · Electric mixer with high torque.
- · Electronic speed controller (rpm control) to OPTIMISE the mixing of each material.
- · Equipped with a mechanical 2 SPEED gearbox (450/780 rpm).
- · Better electrical SAFETY thanks to its double insulation.
- · ATTRACTIVE and FUNCTIONAL Design.
- · Connection to mixing paddles with M14 thread.
- Double handle with bi-material grip providing better ERGONOMICS, COMFORT and STABILITY.
- · Chassis in TECHNICAL, LIGHT, and STRONG plastic. Maximum RELIABILITY AND DURABILITY.
- · SAFETY on button. Prevents unintentional start-up.
- · Smooth start system.
- Direct access to the motor's brush housing for quick and easy maintenance.
- Includes mixing paddle with 3 helixes of 140 mm diameter for mortars and cementitious adhesives.
- Option to couple a RUBI FAST-IN adapter for paddles (NOT included).
- · Includes brushes and 19 and 22 mm spanners.
- · Version available with transport case (ref. 26974).
- · Compatible with chucks and range of mixing paddles RUBI.







































RUBIMIX-9 SUPERTORQUE

RUBIMIX-9 SUPERTORQUE UK

RUBIMIX-9 SUPERTORQUE + CASE

RUBIMIX-9 SUPERTORQUE + CHUCK



REF.		W	5	RPM	Ů	=		
26970			230V-50/60Hz.					
26971	_		110V-50/60Hz.		5,1 kg			
26972		1800 W	220V-50/60Hz.	1ª 0-450 / 2ª 0-780		2	18	
26974	V		270V F0 // 0U-		8,85 kg			
		1	230V-50/60Hz.			1		

ACCESSO	DIFS



Mortar Mixer M14 Thread 3 ZN-Zinc plated HELIX

26975



REF. Mortar mixer paddle Thread M14 3 HELIX



5,1 kg

REF. RUBIMIX buckets
























RUBIMIX-9 N

VERSATILITY BY CHANGING THE MIXING PADDLE.

For cementitious adhesives, resins, paints and other materials.



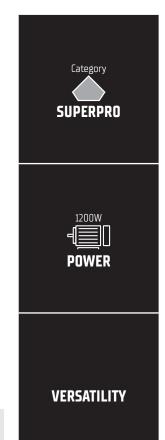





















- · Higher mixing performance, thanks to a more efficient torque.
- · 2 speed gearbox and Electronic speed controller (R.P.M. regulation) to optimize the mixing of each material.
- \cdot Quick and easy to change the brushes. High comfort.
- · Safety lock to prevent unexpected start.
- Power: 1200 W.
- · Double insulation.
- · Direct connection M14 thread.
- Electronic regulator (1st 0-650 r.p.m. / 2nd 0-850 r.p.m.). Ø maximum paddle: 140 mm.
- \cdot Ø 4 3/4" (120 mm) mixing paddle included.

	REF.		W	5	RPM	Ů	=	
RUBIMIX-9 N	25940			210-240V 50-60 Hz.				
DUDINAL ON HIE	25942			110-130V 50-60 Hz.		5,5 kg		7/
RUBIMIX-9 N UK	25944	_	1200 W	210 2/0/50 /0 !!	1ª 0-650 / 2ª 0-850		2	24
RUBIMIX-9 N + CHUCK	24986			210-240V 50-60 Hz.		5,6 kg		
RUBIMIX-9 N + CASE	24958	√		210-240V 50-60 Hz.		7,8 kg		18





Mortar Mixer M14 Thread 3 ZN-Zinc plated HELIX



Plaster mixer paddle Thread M-14



Mortar mixer paddle Thread M14 3 HELIX



RUBIMIX buckets




RUBIMIX-16 ERGOMAX

INNOVATIVE AND ERGONOMIC

For cementitious adhesives, resins, paints and other materials.

























- · Powerful 1600W motor for greater mixing capacity and high reliability.
- · New and improved handle. Comfort and stability.
- · Quick Connect System FAST-IN. Change rod without tools.
- · Electric mixer mortar powerful 1600 W.
- · Double insulation.
- $\boldsymbol{\cdot}$ Gearbox with 2 speeds (1st 0-430 rpm / 2nd 0-570 rpm).
- Electronic speed controller (R.P.M. regulation).
- Ø maximum of mixer 160 mm.
- Mixer paddle Ø 140 mm. FAST-IN (5 9/16 ") included.
- Thread Direct link for mixers with M14 finish.
- · Weight: 4.6 kg.
- · Electrical cable: 3 m.

	REF.		W	5	Ċ	=	
RUBIMIX-16 ERGOMAX 230V 50/60HZ	24994			230V 50-60Hz.			24
RUBIMIX-16 ERGOMAX 110V 50/60HZ UK	24995	-	1/00 W	110V 50-60Hz.			10
RUBIMIX-16 ERGOMAX 230V 50/60HZ UK	24996		1600 W	2701/50 /011	4,6 kg	2	18
RUBIMIX-16 ERGOMAX 230V 50/60HZ W/CASE	24998	√		230V 50-60Hz.			24





REF. Mixer Paddles FAST-IN 3HELIX



REF. RUBIMIX buckets



93



MIXING PADDLES & FAST-IN

· ADAPTABLE TO RUBI MIXERS AND OTHER BRANDS.









ADAPTER FAST-IN THREAD

- · Adapter for use of the FAST-IN mixer paddles.
- Transforms threaded connection M14x2 to quick connection system FAST-IN.
- Adaptable to any mixer with M14x2 thread.

	REF.	=
FAST-IN ADAPTER	76907	1











HIGH MIXING CAPACITY

USE WITH DRILLS

MORTAR MIXER PADDLE DUPLEX (RUBIMIX-9 DUPLEX)

TILE ADHESIVE

- To mix up to 66.1 110.2 Lb. (30 50 kg) of glue mortar. M27 x 1,5 thread finish.
- Fits directly to RUBIMIX-9 DUPLEX.

	REF.		<u>}</u>	<u> </u>		
M-120 DUPLEX PADDLE (2 UN.)	25946	30-50 kg	570 mm	120 mm	1	72



MORTAR MIXER 3 HELIX

• To mix cement mortars.

◆ PRO

- · Helix head with 3 blades for higher efficient mixing.
- Adaptable to RUBIMIX range by chuck (Ref. 71967).

	REF.		\$ [<u> </u>	=	
MORTAR MIXER M-80 3H	76945	10-15 kg	400 mm	80 mm		360
MORTAR MIXER M-100 3H	76946	15-20 kg	550 mm	100 mm	0	










FAST-IN CONNECTION

MIXER PADDLES FAST-IN 3HELIX

- · To mix cement mortars.
- Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- · Less effort in mixing.
- Less vibrations. Greater comfort.
- · Fast connection without tools FAST-IN.
- Compatible with RUBIMIX E-10 ENERGY CAS, RUBIMIX-9 POWER MAX, RUBIMIX-16 ERGOMAX or FAST-IN (Ref. 76907) Adaptable to any mixer with M14x2 connection.

	REF.		§	<u> </u>		
MIXER PADDLE M-120-FI 3H	76942	15-25 kg	/00	120 mm	1	
MIXER PADDLE M-140-FI 3H	76943	25-40 kg	600 mm	140 mm	2	84





MORTAR MIXER PADDLE THREAD M14 3 HELIX

- · To mix cement mortars.
- Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- · Less effort in mixing.
- Less vibrations. Greater comfort.
- M14 x 2 thread connection.
- $\boldsymbol{\cdot}$ Adaptable directly to RUBIMIX range and other brands.

	REF.		E	<u> </u>	
MORTAR MIXER PADDLE M-100-R 3H	76917	15-20 kg	550 mm	100 mm	6
MORTAR MIXER PADDLE M-120-R 3H	76918	15-25 kg		120 mm	
MORTAR MIXER PADDLE M-140-R 3H	76919	25-40 kg	600 mm	140 mm	2
MORTAR MIXER PADDLE M-160-R 3H	76940	30-60 kg		160 mm	





EPOXY MIXER PADDLE E-80

- Special mixing between 2.2 4.4 Lb. (1 2 kg) of epoxy resins.
- · 8 mm hexagonal finish.
- · Adaptable to RUBIMIX range by chuck (Ref. 71967).

		REF.		\$	<u>k</u>	=
EPOXY MIXE	R PADDLE E-80	65939	1-5 kg	400 mm	80 mm	6



♠ PRO	LIQUIDS	USE WITH DRILLS

LIQUID MIXER PADDLE - HEXAGONAL ROD

 $\boldsymbol{\cdot}$ To mix liquid and low density materials.

· Adaptable to RUBIMIX range by chuck (Ref. 71967).

	REF.		F			
LIQUID MIXER PADDLE L-80	65933	5-15 kg	400 mm	80 mm	,	462
LIQUID MIXER PADDLE L-100	65934	15-25 kg	550 mm	100 mm	0	


































TOOLS FOR FIXING TILES AND FINISHINGS

Trowels, Brick Trowels, Floats, Rubber grout, Spatulas.
Scrapers, Makers, Supports and Templates, Mallets.
Suction cups, Work Table, Tools box, Hammers, Shovels, Chisels.

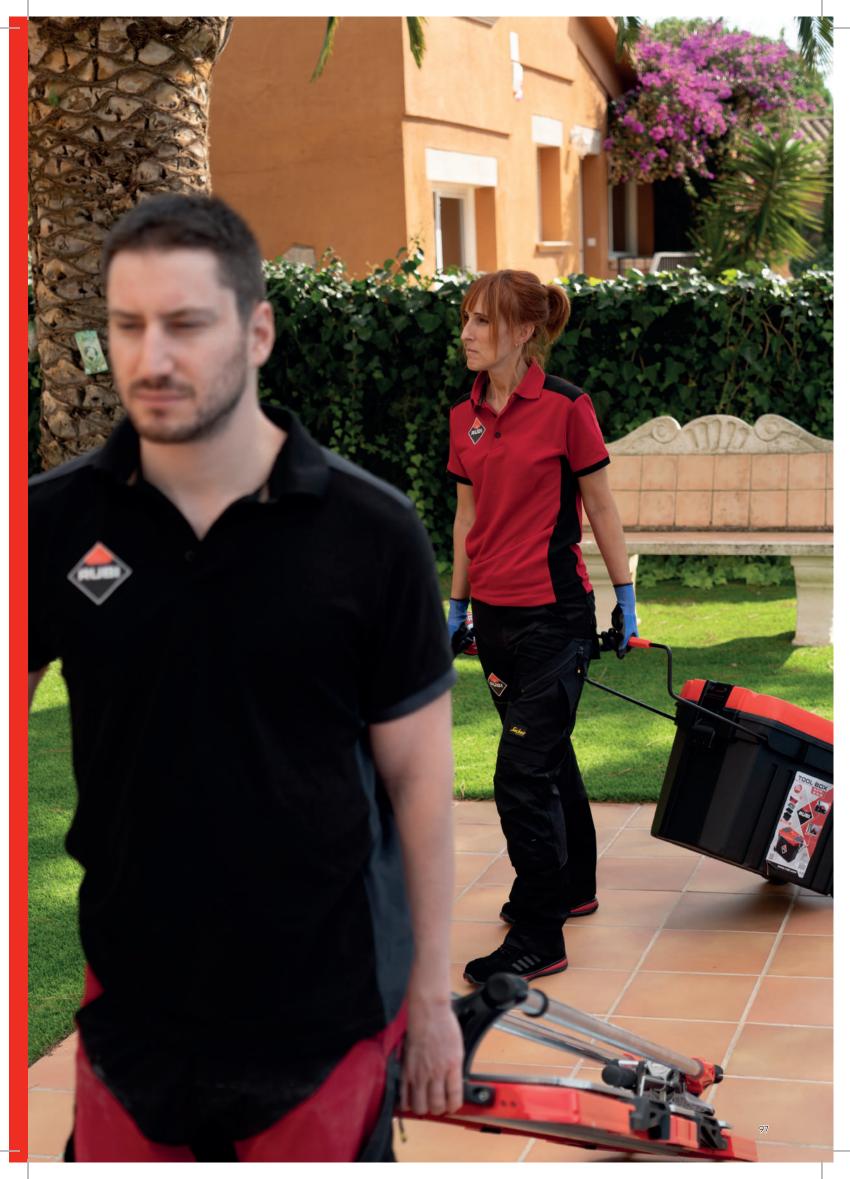









TROWELS AND NOTCHED TROWELS





LEVELLING TROWELS

- · Levelling trowels wood handle.
- · Special high wear resistant steel plate.
- Plate measures:15 3/4"x4 11/32"(40 x 11 cm).

	REF.	=	
LEVELLING TROWEL POINTED TIP	60997	2	288





OPEN HANDLE

RUBIFLEX



TROWELS & NOTCHED TROWELS OPEN RUBIFLEX HANDLE

- Extremely light and resistant aluminium core.
- The connection between core and plate is very rigid.
- · Highly wear-resistant special steel sheet with protection against corrosion by means of colourless varnish (STEEL).
- · Special stainless steel sheet with high wear resistance (SS).
- RUBIFLEX ergonomic handle with two textures.
- · Perfect blade flatness.
- YW notched trowel (Ref.77923), with a distinctive and unique shape of notches (not rectangular) to achieve optimal wetting (near 100%) of the tile with the adhesive. Specially created for tiles for which wetting is key (large tiles),
- and works very well with large format and SLAB type tiles.

	REF.	[LT]			=	
INOX TROWEL 11" (28 CM.)	72919	- mm	- mm			
INOX NOTCHED TROWEL 11" (28 CM.) 1/8"X1/8" [3X3 MM.]	74936	3 mm	3 mm			
INOX NOTCHED TROWEL 11" (28 CM.) 3/16"X3/16" (4.5x4.5 mm.)	74937	4,5 mm	4,5 mm			270
INOX NOTCHED TROWEL 11" (28 CM.) 1/4"X1/4" [6X6 MM.]	74938	6 mm	6 mm		6	2/0
INOX NOTCHED TROWEL 11" (28 CM.) 3/8"X3/8" [8X8 MM.]	74940	8 mm	8 mm	- mm		
INOX NOTCHED TROWEL 11" (28 CM.) 13/32"X13/32" (10X10 MM.)	74941	10 mm	10 mm			
INOX NOTCHED TROWEL 11" (28 CM.) 1/2"X1/2" (12X12 MM.)	74942	12 mm	12 mm			270
INOX NOTCHED TROWEL 11" (28 CM.) 9/16"X9/16" [15X15 MM.]	76947	15 mm	15 mm			-





BRICK TROWELS

• PERFECT ADAPTION IN SHAPES, SIZES AND SPECIFIC CHARACTERISTICS MEETING THE DEMANDS OF EACH MARKET.





PFP01

• Ergonomic RUBIFLEX.

	REF.	B	K.		=
PFP01-120 MM. (4 3/4")	75012	120 mm	73 mm	0,150 kg	,
PFP01-140 MM. (5 1/2")	75014	140 mm	75 mm	0,158 kg	0



PFP05

• Ergonomic RUBIFLEX.

	REF.	18	K.	ightharpoons	=
PFP05-180 MM. (7 1/16")	75418	180 mm	105 mm	0,285 kg	,
PFP05-200 MM. (7 7/8")	75420	200 mm	110 mm	0,319 kg	0



PFP19

• Ergonomic RUBIFLEX.

	REF.	B	L	Ċ	=
PFP19- 80 MM. (4 5/16")	76808	109 mm	80 mm	0,152 kg	,
PFP19- 90 MM. (5 1/16")	76809	128 mm	90 mm	0,168 kg	0



PFP23

· Ergonomic RUBIFLEX handle.

	REF.	B	L	ightharpoons	=
PFP23-180 A MM. (7 3/16")	77258	183 mm	117 mm	0,361 kg	,
PFP23-185 B MM. (7 1/8")	77268	181 mm	131 mm	0,390 kg	0



PFP24

• Ergonomic RUBIFLEX handle.

	REF.	B	K	Ċ	=
PFP24-140 MM. (5 1/2")	77314	140 mm	82 mm	0,154 kg	
PFP24-160 MM. (6 5/16")	77316	160 mm	92 mm	0,153 kg	,
PFP24-180 MM. (7 1/16")	77318	180 mm	103 mm	0,263 kg	6
PFP24-200 MM. (7 7/8")	77320	200 mm	110 mm	0,275 kg	



PFP25

• Ergonomic RUBIFLEX handle.

	REF.	B	K.		=
PFP25-180 MM. (7 1/16")	77418	180 mm	110 mm	0,303 kg	6

































PFP33

• Ergonomic RUBIFLEX handle.

	REF.	18	Ž,	Ċ	
PFP33-170X50 MM. [6 11/16" X 1 15/16"]	79050	170 mm	50 mm	0,154 kg	6



PFM55

· Special for tile installers, sharp arrow.

	REF.	B	X.		=
PFM55-165 MM. (6 1/2")	38416	165 mm	114 mm	0,280 kg	6

FLOATS

PLASTER FLOATS



SUPERPRO



RETICULATED POLYETHYLENE FLOATS

- For finish floating mortar plastering.
- · Maximum ligthness and resistance to wear off.
- · Very low water absortion. Guarantees dimensional stability.

	REF.	=
RECTANGULAR POREX TROWEL 8 7/8" X 5 1/2" [24 X 14 CM]	83999	





ROUGH PLASTIC HANDLE FLOATS

- · Reinforced plate of high resistance to abrasion and long durability.
- · Perfectly flat base.

	REF.	=	
POINT TIP FLOAT 10 X 5" (27 X 14 CM.)	71941		360
RECTANGULAR FLOAT 10" X 7" (27 X 18 CM.)	71943	10	240
RECTANGULAR FLOAT 13" X 9" (34 X 23 CM.)	71944		180

RUBBER GROUT FLOATS

- · RUBBER FLOATS FOR GROUTING, WITH ERGONOMIC OR WOODEN HANDLES.
- · AVAILABLE IN DIFFERENT RUBBER TO OBTAIN THE BEST FINISHING ACCORDING TO THE JOINT WIDTH.







REPLACEABLE GROUT FLOAT PRO

- Grout Float (Ref.84924) with sheet resistant to abrasion.
- · Replaceable with spare (ref. 84925).

	REF.	-
REPLACEABLE GROUT FLOAT PRO	84924	6
SPARE GROUT FLOAT PRO	84925	15









GROUT FLOATS SUPERPRO WOOD

- · Wood ergonomic handle.
- · Available in different hardnesses of rubber for best finish as the joint width.
- Rubber float trowel, with white rubber sheet wear resistant.
- Solid rubber float, with hard rubber abrasion resistant. Thermoflex float, medium hardness.

	REF.	=	
RUBBER GROUT FLOAT SUPERPRO	65970		
THERMOFLEX RUBBER GROUT FLOAT SUPERPRO	65976	6	540
SOLID RUBBER GROUT FLOAT SUPERPRO	65975		





- · Plastic ergonomic handle.
- Available in different hardnesses of rubber for best finish as the joint width.
- Rubber float trowel, with white rubber sheet wear resistant.
- Solid rubber float, with hard rubber abrasion resistant. Thermoflex float, medium hardness.

Hardriess.			
	REF.	=	
RUBBER GROUT FLOAT SUPERPRO	65971		
THERMOFLEX RUBBER GROUT FLOAT SUPERPRO	65973	6	540
SOLID RUBBER GROUT FLOAT SUPERPRO	65972		

SPATULAS







FLOOR TILE GROUT SPATULA

- Reinforced spatula for professional jobs. Replaceable strip that can be used on both sides.
- · Includes grip and aluminium holder.

	REF.	=
FLOOR TILE GROUT SPATULA 24" (60 CM.)	70905	1



ALUMINIUM HANDLE

• Adaptable to floor tile grout spatula 50, 60 and 75 cm.

	REF.	<u>-</u>
ALUMINIUM HANDLE	70904	1































SCRAPERS

MORTAR SCRAPERS, SINGLE LAYER, JOINTS AND PLASTER.





SUPERPRO



FACADE MORTAR SCRAPER 16" X 2 7/8" (50X72MM)

- · Facade mortar scraper with wooden handle.
- Plate dimensions: 6x2 7/8" (150x72mm).

	REF.	=
WOODEN HANDLE SCRAPER 6X2" 7/8 (150X72 MM.)	65963	6



SUPERPRO



- Facade mortor scraper with two types of handles: Wood and plastic.
- plate dimensions 10" x 5 3/4" (250x144mm).



	REF.	=	
WOODEN HANDLE SCRAPER 10" X 5 3/4" (250X144 MM.)	72960	6	480
SPARE SCRAPER 10" X 5 3/4" (250X144 MM.)	65957	18	-
PLASTIC HANDLE SCRAPER 10" X 5 3/4" (250X144 MM.)	65962	6	480



SUPERPRO





- · Manufactured with aluminium, with 8 blades.
- Dimensions 18" x 3 13/32" (455 x 86 mm).

	REF.	Ů	=
ALUMINIUM PLASTER SCRAPER	72961	0,9 kg	1



JOINT SCRAPER

- Ergonomic handle with two electroplated tungsten carbide plates with high resistance to abrasion.
- Useable with 1, 2 or 3 plates depending on width of the joint.
- · Supplied in blister.

0 4 9 9 11 0 11 10 11 0 11 0 11			
	REF.	=	
JOINT SCRAPER	65907	5	600
SPARE JOINT SCRAPER	71974	10	4600





MARKERS, SUPPORTS AND TEMPLATES

· WIDE RANGE OF MARKERS, SUPPORTS AND TEMPLATES FOR THE PLACEMENT OF TILES.











SUPERPRO

RULE HOLDER NAILS

RULE HOLDER NAIL 10" (250 MM.)

• Hold firmly the rulers on the walls, allowing a comfortable placement of tiles.

REF		=	
779/	.1	6	



SUPERPRO


SHAPE TEMPLATE

· Copies the shape of the areas which are awkward to mark onto tiles, for subsequent cutting. Maximum depth 4.5cm.

	REF.	=
SHAPE TEMPLATE	70925	10

SUPERPRO

HOLE MARKER



· Maximum length 26" (65cm).

	REF.	=
HOLE MARKER XL	72953	6



MASTER LINE MARKER

- · Ideal system to quickly draw straight lines between two points of the wall or floor.
- · Supplied with a bottle of high quality powder for line marker.

	REF.	=
MASTER LINE MARKER	70928	6

SUPERPRO

"MASTER-N" LINE MARKER

- Ideal system to quickly draw straight lines between two points of the wall or floor.
- Supplied with a bottle of high quality powder for line marker.
- · Manufactured in plastic bimaterial (RUBIFLEX) high resistance to impact.
- · Includes auxiliary level for levelling rope before tagging.
- · Length of rope: 30 m.

	REF.	=
"MASTER-N" LINE MARKER	75925	6



STANDARD LINE MARKER

- Ideal system to quickly draw straight lines between two points of the wall or floor.
- Supplied with a bottle of high quality powder for line marking.
- · Length of rope: 15m.

	REF.	=
LINE MARKER W/TRACING POWDER	70926	6

































































SUPERPRO



HIGH QUALITY BLUE POWDER FOR LINE MARKER

 $\boldsymbol{\cdot}$ Blue powder for filling the line marker.

	REF.	=
SPARE BLUE POWDER FOR LINE MARKER 2.2 LB. [1 KG.]	70929	6





CONSTRUCTION PENCIL

- Specially designed for writing on wet or glazed surfaces like ceramic tile, marble, granite, etc.
- · Set of 2 construction pencils supplied in blister.

	REF.	=	
CONSTRUCTION PENCIL	65942	50	450



LINE REEL

· High resistance polyester cord.

	REF.	=
LINE REEL 0 3/8X164 FT. (1.7 MM. X 50 M)	80933	12

MALLETS

MALLETS FOR LEVELLING THE HEIGHT OF THE TILES THROUGH OUT INSTALLATION.







RUBBER MALLET - 2 FLAT SIDES

· Allows to strike at any angle so as to install the tile into its correct position.

	REF.	=	
BLACK RUBBER MALLET 8.8 OZ. (250 GR.)	65904		336
BLACK RUBBER MALLET 17.6 OZ. (500 GR.)	65905	6	230
BLACK RUBBER MALLET 26.4 OZ. (750 GR.)	65908		252

SUPERPRO

RUBBER MALLET - FLAT/SPHERICAL SIDES

· Allows to strike at any angle. One flat surface and the other spherical.

	REF.	=	
WHITE RUBBER MALLET 8.8 OZ. (250 GR.)	66905		336
WHITE RUBBER MALLET 17.6 OZ. (500 GR.)	66906	6	220
WHITE RUBBER MALLET 26.4 OZ. (750 GR.)	66907		252





SOFT BLACK RUBBER MALLET

• A softer mace to protect the ceramic pieces.

	REF.	=	
SOFT BLACK RUBBER MALLET 17.6 OZ. (500 GR.)	88555	50	600
SOFT BLACK RUBBER MALLET 26.4 OZ. (750 GR.)	88553	40	480



OCTO-PLUS ENERGY CAS

BATTERY-POWERED SUCTION CUP FOR THE HANDLING OF CERAMIC TILES.

Adapts to any surface finish without leaving a mark on the tile.





- Powered by CAS Li-lon 12V 2Ah battery, compatible with Metabo brand battery tools and
- with all those that are part of the CAS 12V platform.
- LED battery charge level indicator.
- · Maximum load capacity: 150kg.*
- · Pressure release mechanism.
- Load loss indicator (LED).
- In the event of a loss of pressure, the vacuum pump is automatically reactivated until the working pressure is reached again.
- · *only on smooth surfaces and horizontal loading.

	REF.	5	O	Ö		=
OCTO-PLUS ENERGY CAS EU	66961	171/746		11.04	151.4	
OCTO-PLUS ENERGY CAS UK	66975	12V 2Ah	200 mm	1 kg	1,5 kg	1
BATTERY CAS LIPOWER 12V 2AH	85903					



























































•• PROFESSIONAL



USB BATTERY

OCTO-USB ENERGY

- Battery suction cup designed for handling ceramic tiles.
- 3.7V battery integrated in the suction cup and charging via USB-C cable.
- In case of loss of pressure, the vacuum pump is automatically reactivated until it reaches working pressure again.
- · Maximum load capacity: 140 kg.*
- Includes transport case.
- *only on smooth surfaces and horizontal loading.

	REF.	5	O		★	-
OCTO-USB ENERGY	66967	3,7 V 1,2 Ah	200 mm	1 kg	15 kg	2

^{*} Only on smooth surfaces and horizontal handling



VACUUM



SC-200 SUCTION CUP WITH VACUUM PUMP

- · Suction cup for handling large and heavy tiles.
- · Adapts to any surface finish.
- · Suction applied by manual vacuum pump.
- · Load loss indicator (red mark).
- · Pressure-release mechanism.
- Maximum load capacity: 110kg.

	REF.	=
SC-200 SUCTION CUP WITH VACUUM PUMP	18919	1





VACUUM

SECURITY

NO MARKS

GSC-200 GREY VACUUM SUCTION

- Suction cup for the manipulation of large ceramic tiles and heavy porcelain slabs.
 - Adapts to any surface without leaving any marks.
 - Fixing by vacuum manual pump.
 - · Load loss indicator (red mark).
 - · Pressure relese mechanism.
 - Maximum load capacity: 110 kg.
 - · High resistanceplastic body.

	REF.		=
GSC-200 GREY VACUUM SUCTION	21951	1,5 kg	1







WORK TABLES









- **FOLDING 4-IN-1 WORKING TABLE**
- 4 uses in 1: Work bench, scaffold, dolly and creeper.
- · Foldable, easy to transport and storage.
- Double sided board: MDF wood side (work bench function) and non-slippery PP plastic side (rest of functions). EASY interchangeable.
- $\boldsymbol{\cdot}$ Reinforced stainless steel area for harder jobs. Avoids damages on wooden surface.
- Angle conveyor and rule printed on the wooden side. Also includes a hole for small drillings (max. 25 mm) and hand tools insterts on metal frame.
- Folded table: 80x52x12,5cm.
- · Unfolded table: 115x52x80cm.

	REF.	=	
FOLDING 4-IN-1 WORKING TABLE	66924	1	16

































TOOLS BOXES

TOOL BOXES FOR THE CONSTRUCTION PROFESSIONAL.





SUPERPRO



PROFESSIONAL TOOL BOX

- · Large tool box. With wheels and handles for transport.
- · Lid with 2 pockets and 4 hangers to fix objects with rubber bands (Not Included).
- · It contains internal tray with 4 compartments.
- Outer Dimensions: 31" x 19" x 20" (80 x 49 x 50 cm).
- Inner Dimensions: 24" x 14" x 16" (62 x 35 x 41 cm).
- · Capacity: 25 GL (89 L).

	REF.	_H =	
PROFESSIONAL TOOL BOX	75965	1	4

MALLETS & HAMMERS

 MALLETS AND HAMMERS OF GREAT QUALITY WITH TWO TYPES OF HANDLES, WOOD AND RUBIFLEX.





SUPERPRO



STONING HAMMER WOOD HANDLE

- $\boldsymbol{\cdot}$ Special forged Steel head, tempered and hardened.
- SPANISH type head with electrostatic black paint coating and milled hitting ends.
- · Varnished, HICKORY wood handle.
- Head's fixation to handle by cylindrical steel wedge and sealed by resin.

 Δ

 $\boldsymbol{\cdot}$ Weight balanced to reduce hand's kickback.

	REF.	=
STONING HAMMER WOOD HANDLE 700 GR.	71896	6





FRAMER HAMMER RUBIFLEX HANDLE

- Forged, adjusted and tempered steel head of 28.2 oz (800gr). Double placer / remover for nails, one magnetised.
- Ergonomic handle RUBIFLEX: Unbreakable structure with resistant-section fibreglass nucleus, optimised for shock absorption, increasing the durability of the handle.
- Security connection between handle and steel head by inverse cone.
- Grip with elastic slip-proof elastic and surface grooves for maximum hold.

	REF.	=
FRAMER HAMMER 20" (500 MM.)	82986	6





AD.





STONING HAMMER SOFTGRIP HANDLE

- · Special forged Steel head, tempered and hardened.
- SPANISH type head with electrostatic black paint coating and milled hitting ends.
- PP handle with fibre glass core, optimal for shock absorption. Improves handle's long-life.
- Bi-material SOFTGRIP handle, non-slippery and grooved for a better grip.
- Head's fixation to handle by cylindrical steel wedge and sealed by resin.
- Weight balanced to reduce hand's kickback.

	REF.	=
STONING HAMMER SOFTGRIP HANDLE 700 GR.	71898	,
STONING HAMMER SOFTGRIP HANDLE 1000 GR.	71899	0

SHOVELS

 SHOVELS AND SPADES WITH VARNISHED, WOODEN HANDLE AND SPADES HIGHLY RESISTANT AT BREAKING POINT.







WOODEN RING HANDLED SQUARE SHOVEL

- Squared shovel with wooden handle "Y" shaped.
- Ergonomic grip. Varnished wooden handle.

	REF.	=	
WOODEN RING HANDLED SQUARE SHOVEL	82960	6	36



PROP HANDLED SQUARE SHOVEL

- Squared shovel with wooden handle "T" shaped.
- · Varnished wooden handle.

	REF.	=	
PROP HANDLED SQUARE SHOVEL	82961	6	36































SUPERPRO

"Y" HANDLE

POINTTIPPED SPADE



WOODEN RING HANDLED POINT-TIPPED SPADE

- Shovel with D finish.
- Handle with "Y" ring shaped plastic.
- Ergonomic grip, varnished eucalyptus.

	REF.	=	
WOODEN RING HANDLED POINT-TIPPED SPADE	82963	6	36























"T" HANDLE

POINTTIPPED SPADE



PROP HANDLED POINT-TIPPED SPADE

- Shovel with "D" shape finish.
- · Handle T shaped. Varnished wooden handle.

	REF.	=	
PROP HANDLED POINT-TIPPED SPADE	82964	6	36

CHISELS

· WIDE RANGE OF CHISELS, POINT CHISELS AND NIPPERS.



SUPERPRO

WIDE CHISELS

- To remove tiles on renovation jobs.
- · Made of CrVa. alloy steel. Forged, hardened and tempered cutting edge.
- Regrindable.

	REF.	=
WIDE CHISEL 10"/2 3/8" X 1 1/32" X 17/32" (250/60X26X13MM)	70924	10



FLAT CHISELS

- Made of CrVa. alloy steel. Forged, hardened and tempered cutting edge.
- · Regrindable.

	REF.	=
CHISEL 10" X 29/32" X 17/32" (250 X 23 X 13 MM.)	70916	
CHISEL 12" X 29/32" X 17/32" (300 X 23 X 13 MM.)	70917	10
CHISEL 14" X 29/32" X 17/32" (350 X 23 X 13 MM.)	70918	



























ACCESSORIES FOR FIXING TILES AND FINISHINGS

Measuring systems
Tile spacers
Levelling systems

































CONSTRUCTION LEVELS

WIDE RANGE OF LEVELS.

IN COMPENSATION CONTRACTOR





RUBILEVEL ANTISHOCK

- · Levels manufacturated in reliable, resistant aluminium.
- Double machining to ensure a constant precision in the top face and the base.
- · Accuracy: 0,5 mm/m.
- Three bubbles for checking horizontal, vertical and and 45° levels.
- · Double and ergonomic bi-material handle.
- Rubber protector at the ends.
- DUAL view vertical vial for front measurements. Eliminates parallax error.
- · MAGNIFIED horizontal vial for the CLEAREST view of the bubble.

	REF.	=	
RUBILEVEL ANTISHOCK 24" (60 CM.)	76932	8	672
RUBILEVEL ANTISHOCK 32" (80 CM.)	76933		504
RUBILEVEL ANTISHOCK 40" (100 CM.)	76934		707
RUBILEVEL ANTISHOCK 48" (120 CM.)	76935		392

MEASURING TAPES

HOMOLOGATED PRECISION MEASURING TAPES, TWO MODELS AVAILABLE.



SUPERPRO





IRONBLADE MEASURING TAPES

- · Metal case with rubber coating to improve grip.
- · Approved precision measuring tapes: Class II
- · Automatic tape lock. (only available in mm).

	REF.	=
IRONBLADE MEASURING TAPE 197" X 3/4" (5M X 19MM)	75904	
IRONBLADE MEASURING TAPE 197" X 3/4" (5M X 25MM.) DOUBLE MARKING	75909	12
IRONBLADE MEASURING TAPE 315" X 3/4" (8M X 25MM)	75905	

SQUARES





SQUARES

- Square 15/8" x 13/16" (40x20mm) with high dimensional stability.
- · With bichromated treatment.

	REF.	=
SQUARE- 24" (60 CM.)	60993	1
SQUARE- 32" (80 CM.)	60994	1



 \sqrt{m}



TILE SPACERS & WEDGES

• TILE SPACERS, "T" SPACERS AND WEDGES FOR THE CORRECT PLACEMENT OF TILES. QUALITY BASE MATERIAL.







TILE SPACER 3/32" (2MM)

- For wall & floor tiles with minimum joint.
- Quality base material, without impurities or imperfections.

	REF.	=	
TILE SPACERS 3/32" (2 MM.) - (B-1.000 U.)	02000	1	768





LONG TILE SPACERS 3/32" (2 MM L)

- For large ceramic format and rectified.
- · Quality base material, without impurities or imperfections.

	REF.	=	
LONG TILE SPACERS 3/32" (2 MM.)-L - (B-300 U.)	02952	10	960
LONG TILE SPACERS 3/32" (2 MM.) -L -(B-1000 U.)	02972	1	378





TILE SPACERS 1/8" (3MM)

- For floor tiles with thin joint.
- Quality base material, without impurities or imperfections.

	REF.	=	
TILE SPACERS 1/8" (3 MM.) -(B-200 U.)	02902	10	1200
TILE SPACERS 1/8" (3 MM.) -(B-1.000 U.)	02001	1	324



LONG TILE SPACERS 1/8" (3MM L) "REINFORCED"

- · For large ceramic format and rectified.
- Quality base material, free from impurities and imperfections.
- Redesigned internal geometry. High flexural strength and crushing.
- · Ideal for large format tiles in walls.

	REF.	=
LONG TILE SPACERS 1/8" (3 MM.)-L -(B-200 U.)	02953	10
LONG TILE SPACERS 1/8" (3 MM.)-L -(B-1000 U.)	02973	1





TILE SPACER 5/32" (4MM) " REINFORCED "

- For floor tiles.
- Quality base material, free from impurities and imperfections.
- $\boldsymbol{\cdot}$ Redesigned internal geometry. High flexural strength and crushing.
- · Ideal for large formats.

	REF.	=	
TILE SPACERS 5/32" (4 MM.) -(B-200 U.)	02954	10	960
TILE SPACERS 5/32" (4 MM.) -(B-1000 U.)	02974	1	216





















































XX









SUPERPRO



TILE SPACERS 3/16" (5MM)

- · For floor tiles.
- Quality base material, without impurities or imperfections.
- \cdot Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.	=	
TILE SPACERS 3/16" (5 MM.) -(B-100 U.)	02903	10	960
TILE SPACERS 3/16" (5 MM.)-(B-1.000 U.)	02002	1	144

SUPERPRO



TILE SPACERS 1/4" (6MM)

- · For floor tiles.
- Quality base material, without impurities or imperfections.
- \cdot Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.	=	
TILE SPACERS 1/4" (6 MM.) - (B-100 U.)	02036	10	540

SUPERPRO



TILE SPACERS 9/32" (7MM)

- For floor tiles.
- · Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.	=	
TILE SPACERS 9/32" (7 MM.) -(B-100 U.)	02904	10	540

SUPERPRO

SUPERPRO




TILE SPACERS 13/32" (10MM)

- For inductrial or rustic tiles.
- Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.	=	
TILE SPACERS 13/32" (10 MM.) -(B-50 U.)	02905	10	540

T-SPACERS 3/32" (2MM)



 Quality base 	material	without	impurities o	r imperfections.	
					_

	REF.	=	
T-SPACERS 3/32" (2MM) (B-1000 UN.)	02864	1	540









T-SPACERS 1/8" (3MM)

- · Ideal for "brick style" tiling and perimeters.
- · Quality base material, without impurities or imperfections.

	REF.	=	
T-SPACERS 1/8" (3 MM.) -(B-200 U.)	02923	10	1680
T-SPACERS 1/8" (3 MM.) -(B-1000 U.)	02063	1	540





T-SPACERS 3/16" (5MM)

- · Ideal for "brick style" tiling and perimeters.
- Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.		
T-SPACERS 3/16" (5 MM.) -(B-100 U.)	02924	10	2040



T-SPACERS 13/32" (10MM.)

- · Ideal for "brick style" tiling and perimeters.
- Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.	=	
T-SPACERS 13/32" (10 MM.) -(B-50 U.)	02926	10	720

SUPERPRO



WEDGES

- · Wedges for tiling.
- Quality base material, without impurities or imperfections.

	REF.		
WEDGES 3/16" (5MM.)- (B-250 U.)	02396	10	2400
WEDGES 3/16" (5 MM.)-(B-500 U.)	02950		1500
WEDGES 5/16" (7.5MM.)- (B-250 U.)	02397		1800
WEDGES 5/16" (7.5 MM.)- (B-500 U.)	02951		960

SUPERPRO



 $\boldsymbol{\cdot}$ Orders by boxes only. Contains bags.



REF.		≫ / 🗐	
02125	48	300	
02127	42	200	32
02130	36	100	
02132	16	100	30
02135	18	50	32
02279	48	500	30
	02125 02127 02130 02132 02135	02125 48 02127 42 02130 36 02132 16 02135 18	02125 48 300 02127 42 200 02130 36 100 02132 16 100 02135 18 50

XX



































DELTA LEVEL SYSTEM: LEVELLING SYSTEM

SYSTEM TO FACILITATE THE LAYING AVOID LIPPAGE AND IMPROVING FINISHING.



- · Avoids lippage during tile laying in both floor and walls.
- For tile formats from 30x30 cm (12"x12") or bigger. Always with back buttering.
- EASY and INTUITIVE use.
- Impact removal system. ALWAYS in the direction of the grout.
- Guarantee flatness and regularity of the laying surface.
- · Reusable wedges.
- STURDY pliers with pressure adjustment according to the tile thickness.



KIT DELTA LEVEL SYSTEM

- The kit consists of 1 pliers, 100 strips and 100 reusable wedges.
- · Packaged in a handy bucket.

	REF.	=	
KIT DELTA LEVEL SYSTEM 1MM (3-12MM)	03956		
KIT DELTA LEVEL SYSTEM 1,5MM (3-12MM)	03957	1	80
KIT DELTA LEVEL SYSTEM 2MM (3-12MM)	03958		





- Prevents the generation of lippage during ceramic tile installation, both in flooring and on walls.
- Recommended for formats of 30x30 cm and above, always with back buttering.



	REF.	=	
DELTA LEVEL SYSTEM WEDGE N (B-100 UN)	03952	12	192
DELTA LEVEL SYSTEM WEDGE N (B-200 UN)	03953	13	104
DELTA LEVEL SYSTEM WEDGE N (B-400 UN)	03954	6	48
DELTA LEVEL SYSTEM WEDGE N (C-1200 UN)	03955	1	16





PATENTED

PATENTED

DELTA LEVEL SYSTEM PLIERS FAST-FIX

- FAST-FIX regulation system. Without screws, faster and intuitive.
- · Made of steel with bi-material soft-grip handles for greater ergonomics.
- Protective cover on the pressure cam to avoid damaging the tile.

	REF.	=
DELTA LEVEL SYSTEM PLIERS FAST-FIX	03901	6





LEVELLING CERAMIC PROTECTOR

- \cdot To protect the tiles against scratching or abrasive damage caused by friction between wedges, caps and delicate tiles, particularly in the presence of sand or hard particles.
- · For Delta System wedges or Cyclone system threads.
- · Reusable.

	REF.	⋈ ′ =	Ö	=
LEVELLING CERAMIC PROTECTOR	16902	100	4,9 kg	-



DELTA LEVEL SYSTEM STRIP • Different models available:

- \bullet Strip 0,5 mm / 1 mm / 1,5 mm and 2 mm. for tiles from 3 to 12 mm.
- $\boldsymbol{\cdot}$ Strip 1.5 mm and 2 mm for tiles from 11 to 20 mm.
- 3 mm and 5 mm strip for tiles from 6 to 15 mm.
- 5 mm strip for tiles from 13 to 20 mm.

	REF.	=	
STRIP 3-12MM 1MM DELTA LEVEL SYSTEM (B-100 UN)	02850	22	352
STRIP 3-12MM 1MM DELTA LEVEL SYSTEM (B-200 UN)	02851	21	168
STRIP 3-12MM 1MM DELTA LEVEL SYSTEM (B-400 UN)	02839	13	104
STRIP 3-12MM 1MM DELTA LEVEL SYSTEM (B-2400 UN)	02870	1	16
STRIP 3-12MM 1,5MM DELTA LEVEL SYSTEM (B-100 UN)	02840	22	352
STRIP 3-12MM 1,5MM DELTA LEVEL SYSTEM (B-200 UN)	02841	21	168
STRIP 3-12MM 1,5MM DELTA LEVEL SYSTEM (B-400 UN)	02842	13	104
STRIP 3-12MM 1,5MM DELTA LEVEL SYSTEM (B-2400 UN)	02855	1	16
STRIP 3-12MM 2MM DELTA LEVEL SYSTEM (B-100 UN)	02852	22	352
STRIP 3-12MM 2MM DELTA LEVEL SYSTEM (B-200 UN)	02853	24	192
STRIP 3-12MM 2MM DELTA LEVEL SYSTEM (B-400 UN)	02854	13	104
STRIP 3-12MM 2MM DELTA LEVEL SYSTEM (B-2400 UN)	02856	1	16
STRIP 6-15MM 3MM DELTA LEVEL SYSTEM (B-100 UN)	02866	20	320
STRIP 6-15MM 3MM DELTA LEVEL SYSTEM (B-200 UN)	02867	21	168
STRIP 6-15MM 3MM DELTA LEVEL SYSTEM (B-400 UN)	02868	11	88
STRIP 6-15MM 3MM DELTA LEVEL SYSTEM (B-2400 UN)	02869	1	16
STRIP 6-15MM 5MM DELTA LEVEL SYSTEM (B-100 UN)	06826	20	320
STRIP 6-15MM 5MM DELTA LEVEL SYSTEM (B-200 UN)	06827	21	168
STRIP 6-15MM 5MM DELTA LEVEL SYSTEM (B-400 UN)	06828	11	88
STRIP 6-15MM 5MM DELTA LEVEL SYSTEM (C-2400 UN)	06829	1	16
STRIP 11-20MM 2MM DELTA LEVEL SYSTEM (B-100 UN)	02858	70	320
		20	520

SUPERPRO











SUPERPRO



KIT DELTA LEVELLING SYSTEM 20 UN.

STRIP 11-20MM 1,5MM DELTA LEVEL SYSTEM (B-100 UN)

STRIP 13-20MM 5MM DELTA LEVEL SYSTEM (B-100 UN)

- \cdot Ready to use by just removing the cover.
- It contains:
- 20 DELTA Levelling System kits.
- Measurements: 60 x 40 x 105 cm.

	REF.	=	
DELTA LEVELLING SYSTEM 1,5MM PAL BOX (20 UN.)	03918	1	2
DELTA LEVELLING SYSTEM 2MM PAL BOX (20 UN.)	03919		

02846

06981





























































CYCLONE LEVEL SYSTEM: LEVELLING SYSTEM

SYSTEM TO FACILITATE THE LAYING AVOID LIPPAGE AND IMPROVING FINISHING.



- A tool is not required for their installation.
- EASY, QUICK and INTUITIVE to USE. Results less dependent on the skill and experience of the user.
- · LARGE and ERGONOMIC Cap. Does not injure fingers when tightening.
- GUARANTEES the flatness and uniformity of the installation surface.
- System removal by IMPACT (kick or mallet). ALWAYS in the direction of the grout joint.
- · Reusable caps.
- The base of the clip ensures continuous tension between the clip and the cap.
- The lateral grooves at the base of the clip FACILITATE the spread of the adhesive, thus improving the adhesion of the tile.
- Tightening adjustment system depending on the thickness of the ceramic tile.
- Recommended for tiles with thicknesses from 3 to 20 mm.

SUPERPRO



CYCLONE KIT

- The kit consists of 300 clips and 100 reusable caps.
- · Packaged in a practical bucket.

	REF.	=	
KIT CYCLONE 1,5 MM	35964		40
KIT CYCLONE 3 MM	35965	1	40
KIT CYCLONE 5 MM	35903		

SUPERPRO



CYCLONE CAPS

- · Reusable.
- · Special 6 mm external thread.
- · Eccentric detail for better force concentration.
- · Crowned area for better grip.
- · Dimensions: 59x59x38 mm
- · Supplied in reusable container.

	REF.	=	
CYCLONE CAPS (B-100)	35949	5	50
CYCLONE CAPS (B-300)	35950	4	24
CYCLONE CAPS (B-1200)	35951	1	12

SUPERPRO



LEVELLING CERAMIC PROTECTOR

- To protect the tiles against scratching or abrasive damage caused by friction between wedges, caps and delicate tiles, particularly in the presence of sand or hard particles.
- · For Delta System wedges or Cyclone system threads.
- · Reusable.

	REF.	×: 🗐		=
LEVELLING CERAMIC PROTECTOR	16902	100	4,9 kg	-





SUPERPRO



CYCLONE CROSS BASE

- Available in various models:
- Cross base clips of 1.5 and 3 mm.
- $\boldsymbol{\cdot}$ Visual thickness identification by colour.

	REF.	=	
CYCLONE L.S. 1,5 MM CROSS BASE (B-100)	35952	36	
CYCLONE L.S. 1,5 MM CROSS BASE (B-300)	35953	12	17
CYCLONE L.S. 3 MM CROSS BASE (B-100)	35955	36	12
CYCLONE L.S. 3 MM CROSS BASE (B-300)	35956	12	











CYCLONE CROSS T BASE

- · Available in various models:
- 1.5 and 3 mm T-base flanges.
- Visual identification of thickness by colours.

	REF.	=	
CYCLONE L.S. 1,5 MM CROSS T BASE (B-300)	35959	17	17
CYCLONE L.S. 3 MM CROSS T BASE (B-300)	35962	12	12









CYCLONE FLAT BASE

- · Available in various models:
- Flat base clips of 1, 1.5, 2, 3 and 5 mm.
- · Visual thickness identification by colour.

	REF.	=	
CYCLONE L.S. 1 MM FLAT BASE (B-100)	35937	36	12
CYCLONE L.S. 1 MM FLAT BASE (B-300)	35938	12	12
CYCLONE L.S. 1 MM FLAT BASE (B-2400)	35939	1	20
CYCLONE L.S. 1,5 MM FLAT BASE (B-100)	35940	36	12
CYCLONE L.S. 1,5 MM FLAT BASE (B-300)	35941	12	12
CYCLONE L.S. 1,5 MM FLAT BASE (B-2400)	35942	1	20
CYCLONE L.S. 2 MM FLAT BASE (B-100)	35943	36	12
CYCLONE L.S. 2 MM FLAT BASE (B-300)	35944	12	12
CYCLONE L.S. 2 MM FLAT BASE (C-2400)	35945	1	20
CYCLONE L.S. 3 MM FLAT BASE (B-100)	35946	36	12
CYCLONE L.S. 3 MM FLAT BASE (B-300)	35947	12	12
CYCLONE L.S. 3 MM FLAT BASE (C-2400)	35948	1	20
CYCLONE L.S. 5 MM FLAT BASE (B-100)	35900	36	13
CYCLONE L.S. 5 MM FLAT BASE (B-300)	35901	12	12
CYCLONE L.S. 5 MM FLAT BASE (C-2400)	35902	1	20




















BUCKETS AND TUBS

Plastic products for construction

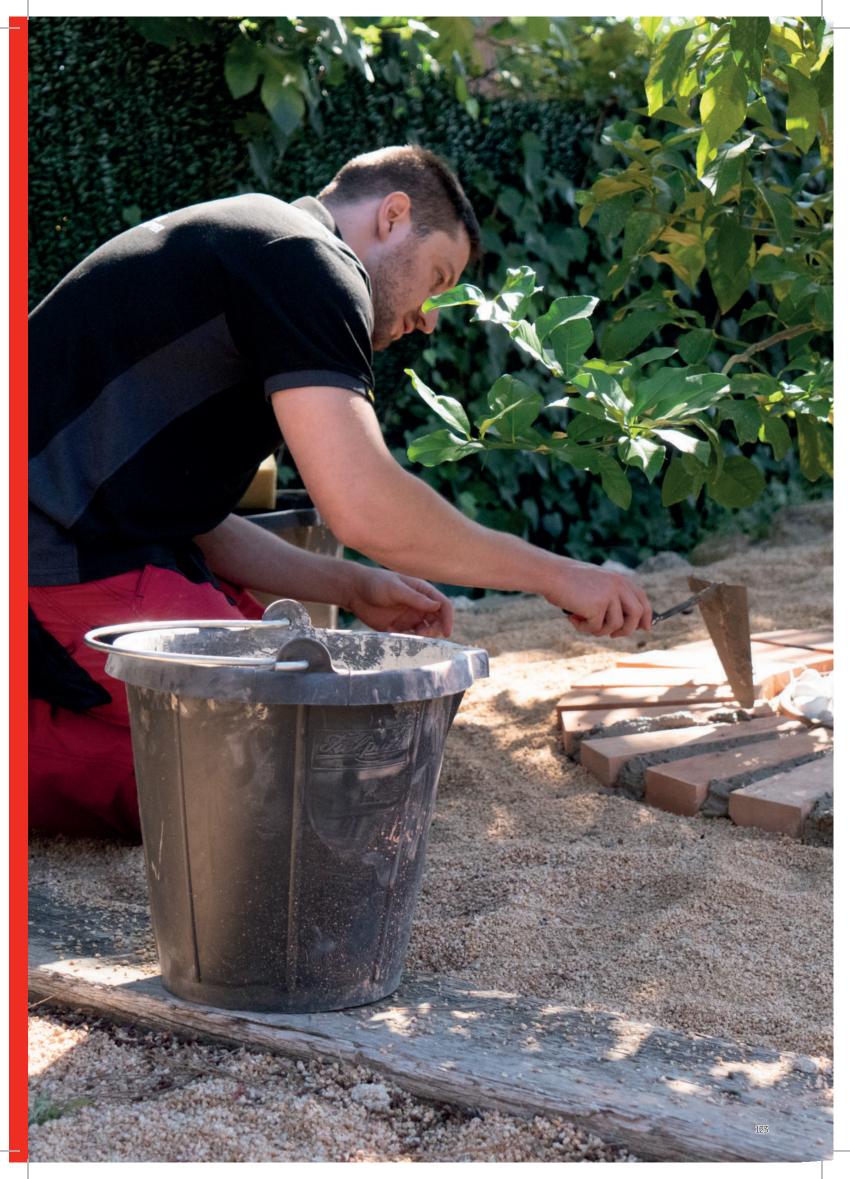

PRO

PRO

PRO



























PLASTIC BUCKETS "LIGHTBUCK"

· High quality plastic buckets are an outstanding option due to their competitive price and light weight. The range of plastic buckets includes models with capacities of 10, 12, 15 and





- The common characteristics of all the plastic buckets are:
- · Made with high quality polyethylene. Greater robustness.
- Suitable for all types of work in the construction industry as well as other industries.
- · Very thick walls for maximum strength and resistance.

ITALIANO PLASTIC BUCKET "LIGHTBUCK" (10 L.)

- Greater comfort during transport. For easy waste collection.
- · Highly resistant metal handle.
- · Walls are reinforced with ribbing





















88770

REF.

- cm

1N I

600











 $\times \times$







PLASTIC BUCKET WITH GRADUATION "LIGHTBUCK" (12 L.)

- · Greater comfort during transport. For easy waste collection.
- · Embossed scale.
- · Highly resistant metal handle.
- · Walls are reinforced with ribbing.











88776











- PLASTIC BUCKET WITH GRADUATION (12 L.)

PLASTIC BUCKET WITH GRADUATION & SPOUT "LIGHTBUCK" (15 L.)

- · Embossed scale.
- · With spout to prevent spillages when pouring.
- · With reinforced rim for greater resistance.
- · Highly resistant metal handle.
- · Walls are reinforced with ribbing.




































PLASTIC BUCKET MODEL 2 "LIGHTBUCK" HANDLE EXT. (20 L.)

- $\boldsymbol{\cdot}$ Greater comfort during transport. Easy waste collection.
- · Heavy duty metal handle.
- Plastic handle. Comfort.











	REF.				$\stackrel{\circ}{\Box}$	=	
PLASTIC BUCKET MODEL 2 "LIGHTBUCK" HANDLE EXT. (20 L.)	88712	370 mm	27 cm	20 I.	0,85 kg	10	450



PLASTIC BUCKET MODEL 2 "LIGHTBUCK" (22 L.)


- Greater comfort during transport. Easy waste collection.
- Heavy duty metal handle.
- Plastic handle. Comfort.
















1 kg






450






























































- The common characteristics of all the plastic baskets are:
- · Made with high quality polyethylene. Greater robustness.
- · Suitable for all types of work in the construction industry as well as other industries.
- · Very thick walls for maximum strength and resistance.

PRO



PLASTIC BUCKETS "HEAVY DUTY"

- · Greater comfort during transport. For easy waste collection.
- · Reinforced handles. Greater resistance.
- · Lightweight.





BLACK PLASTIC BUCKET NO.3 (40 L.) HEAVY









	REF.				$\stackrel{\circ}{\Box}$	-	
DUTY	88778	33 cm	440 mm	40 I.	1,1 kg	10	300

PRO



PLASTIC TUBS Nº. 1 "FLEXTUB" (25 L.)

· Greater comfort during transport. For easy waste collection.





PLASTIC TUB BLACK COLOUR №. 1 (25 L.)







X		
71	-	<u> </u>

REF.				Ů		
88771	30 cm	360 mm	25 I.	0,8 kg	10	450

PRO



PLASTIC TUB №. 3 "FLEXTUB" (40 L.)

- Greater comfort during transport. For easy waste collection.
- · Reinforced handles. Greater resistance.
- · Lightweight.











	REF.	\\	-		$^{\circ}$	=	
PLASTIC TUB BLACK COLOUR №. 3 (40 L.)	88773	33 cm	440 mm	40 I.	1,3 kg	10	300







PLASTIC TUB №. 4 "FLEXTUB" (55 L.)

- Greater comfort during transport. For easy waste collection.
 Lightweight.











	REF.	<u></u>					
PLASTIC TUB BLACK COLOUR №. 4 (55 L.)	88774	33 cm	530 mm	55 I.	1,6 kg	10	200
































SAFETY EQUIPMENT

Personal equipment for construction professionals

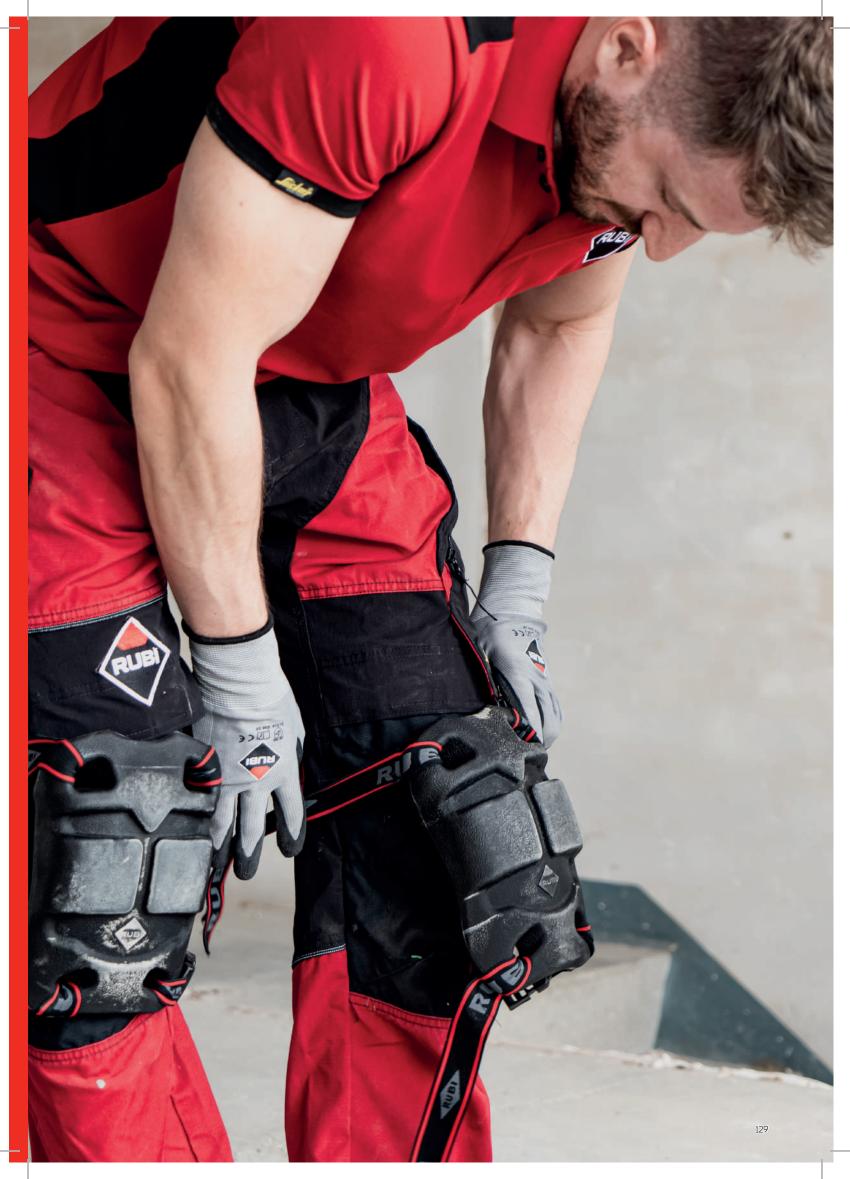

































· RANGE OF KNEE PADS AND ERGONOMIC SEAT.





ALL TERRAIN 4X4



- Useful for any task that requires kneeling for prolonged periods of time.
- Ideal for much more comfortable installation of tiles and flooring in general in different phases of the installation: substrate preparation, installation, grouting and cleaning.
- · LARGE SUPPORT surface area for optimal STABILITY and COMFORT.
- Double strap for keeping the knee pad tightly fitted to the leg at all times.
- · Avoids blocking of blood flow at the back of the knee.
- · Quick strap fastening.
- In accordance with EN14404.
- · Performance level: 1.

	REF.	=	
SET OF PROFESSIONAL KNEE PADS N	66957	6	192



ALL TERRAIN 4X4

FLEX KNEE PADS

- Protection ergonomic flexible. Adjustable elastic band fastener.
- · Professional knee pads of high comfort.
- · Inner body soft materials suitable to the user,
- Flexible and resistant outer shell.
- · Conforms to EN14404.
- Protection level: 1.

	REF.	=
FLEX KNEE PADS	81994	6



HARD SURFACES



GEL DUPLEX KNEE PADS

- Professional knee pads with ergonomic design. Highly comfortable.
- Their design combines the use of hard materials to protect against impacts and uneven floors and soft materials adaptable to the user's anatomy on the inside.
- Besides protecting the user's knees thanks to the silicone gel in their inside, their studied ergonomics gives them great stability, preventing ligaments and tendons fatigue.
- · Wide range of uses thanks to their design " two in one ":
- Can be used together with the external rubber protection of great stability and
- With the main body only, less bulky, which allows the knee to slide without problem over smooth surfaces.
- They incorporate a double fastener, inferior and superior, easy adjustable.
- · Conforms to EN14404.
- · Protection level: 1.

	REF.	=	
GEL DUPLEX KNEE PADS	81989	6	96







SUPERPRO

HARD SURFACES

GEL COMFORT KNEE PADS







- They incorporate two bands Neoprene closure.
- · Conforms to EN14404.
- · Protection level: 1.

	REF.	=	
GEL COMFORT KNEE PADS	81998	6	96



ALL TERRAIN 4X4

KNEE CUSHION

- · Polyurethane cushion for protecting the knees.
- · Makes it easy to work on the floor without using knee pads.
- Its wide surface allows its use as a seat.



	REF.	=
KNEE CUSHION	65943	1





HARD SURFACES



SR-1 ERGONOMIC SEAT

- Aluminium chassis high strength and stability.
- Allows an ergonomic position of comfort.
- Prevents injuries in knees and back.
- · Adjustable seat height and angle for optimum adaptation to each use.
- Robust construction with 7 heavy duty wheels.
- Includes tray for tools and accessories.
- · Ideal for flooring, parquet installation, cleaning and other operations on pavements tasks.
- $\boldsymbol{\cdot}$ Replaceable ergonomic kneepads.
- · Maximum weight: 286 lb (130 kg).

	REF.	=	
SR-1 ERGONOMIC SEAT	81999	1	18

























































SAFETY EQUIPMENT

SAFETY EQUIPMENT FOR BUILDING PROFESSIONALS.







WHITE LENS GOGGLES

- · Field of use: basic.
- · Mechanical resistance to high speed particles, low energy.
- $\boldsymbol{\cdot}$ Extendable in length and vertically adjustable side pieces.
- · Anti-scratch and anti-fog.
- UV Filter.
- · Comfortable and light.
- · Conforms to EN166 and EN170

	REF.	=	
WHITE LENS GOGGLES	80918	12	1200

SUPERPRO



LUMBAR PROTECTOR

- $\boldsymbol{\cdot}$ Recommended to avoid low-back injuries when loading weight or maintain fixed
- · With vertical reinforcement in the lower-back area.
- · Side devices to adjust the pressure at the time of stress.
- · Available in 3 sizes: M, L and XL

	REF.	=
LUMBAR PROTECTOR - L (37 13/16"-40 15/16") (96-104 CM)	80913	1
LUMBAR PROTECTOR - XL (40 15/16"-44 1/8") (104-112 CM)	80914	

SUPERPRO



EAR PROTECTOR

- Comfortable and effective protection for high noise environments.
- · Conforms to EN352-1.

	REF.	=
EAR PROTECTOR	80903	6

SUPERPRO



- **LATEX GLOVES** · Ideal for wet or abrasives tasks.
- For minimal risks only.
- · Made of 100% latex.
- · Conforms to EN420.

	REF.	-	
LATEX GLOVES	20907	12	3240





CLEANING AND MAINTENANCE

Products and accessories for cleaning and installing ceramic tile


































 COMPLETE RANGE OF SPONGES AND GROUT FLOATS FOR CLEANING AND PROTECTION OF TILES.







SUPERPRO SPONGES

- PLUS models have cuts for increased drag on the dirt.
- · Ref. 20905 and 20906 available in Palbox.

	REF.			\Diamond		
SUPERPRO SPONGE	20905	20177	1	7		384
SUPERPRO SPONGE PLUS	20917	20x13x7 cm	1	2		288
SWEEPEX SUPERPRO SPONGE	20928	10107	3	3		704
SWEEPEX SUPERPRO SPONGE PLUS	20932	18x10x7 cm	٥	٥	24	384
MIXED SUPERPRO SPONGE	20906	20x13x7 cm		7		
MIXED SUPERPRO SPONGE PLUS	20918	ZUXIJX/ CIII		2		288
MIXED SWEEPEX SUPERPRO SPONGE SPECIAL FOR JOINTS	20992	18x10x7 cm	4	3		
EPOXY CELLULOSE SUPERPRO SPONGE	22928	17x10x4 cm		4	12	792
MIXED EPOXY CELLULOSE SUPERPRO SPONGE	22929	17x10x5 cm		4	10	640

SUPERPRO



SPONGE FLOAT SUPERPRO

- Floats with SUPERPRO sponge for grout cleaning and finishing.
- PLUS model has cuts for increased performance in wiping away dirt.

	REF.			\Diamond		
SPONGE FLOAT SUPERPRO	20924	20.40 52 5	1	_	10	100
SPONGE FLOAT SUPERPRO PLUS	20908	28x19.5x2.5 cm	1	2	10	180

→ PRO



- Polyurethane foam floats with high absorption.
- The PLUS model has slits for increased performance drag dirt.

	REF.		\Diamond		=	
SPONGE FLOAT PRO	24974	701/7	7	7	10	740
SPONGE FLOAT PRO PLUS	24988	28x14x3 cm	٥	٥	10	240



HANDLE FOR INTERCHANGEABLE SPONGES AND FOAMS

- Adaptable to 12" x 5 11/32" (30 x 13.5 cm.)
- \cdot and 13 13/32" x 6 3/4" (34 x 17 cm.) SUPERPRO sponges and foam replacements.

	REF.	=
HANDLE FOR INTERCHANGEABLE SPONGES AND FOAMS	22912	10





 Δ



SUPERPRO







REPLACEABLE SUPERPRO SPONGES 12" X 5 11/32" (30X13,5CM)

- Float sponges for cleaning and finishing tile and grout jobs. Interchangeable sponges adaptable to the ergonomic handle. (Ref. 22912) and secure attachement to other brands.
- Sponges available with different levels of absorption and resistance to abrasion. Comfortable and secure attachement system.
- PLUS models have cuts for increased drag on the dirt.

	REF.		\longleftrightarrow		- H	
FLOAT WITH REPLACEABLE SUPERPRO SPONGE	22900		1	2		100
FLOAT WITH REPLACEABLE SWEEPEX SUPERPRO SPONGE	22916	30x13.5x4 cm	3	3		180
REPLACEABLE SUPERPRO SPONGE	22910	JUX13.3X4 CIII	1	7		320
REPLACEABLE SUPERPRO SPONGE PLUS	22918		1	2	10	320
REPLACEABLE EPOXY CELLULOSE SUPERPRO SPONGE	22932	7017 57	4	4		
REPLACEABLE SWEEPEX SUPERPRO SPONGE	22922	30x13.5x3 cm	- 3	3		320
REPLACEABLE SWEEPEX SUPERPRO SPONGE PLUS	22914	30x13.5x4 cm	3	٥		320









SUPERPRO SPONGE WITH BASE FOR WASHBOY

- · Large area reinforced base.
- · Handle included (Ref.70904).
- · Polyurethane Sponge.

	REF.			\Diamond		
SWEEPEX SUPERPRO SPONGE WITH BASE FOR WASHBOY	20914	34x17x5 rm	7	7	1	168
REPLACEMENT SWEEPEX SUPERPRO SPONGE WITH BASE FOR WASHBOY	20919	34X1/X3 LIII	٥	3	1	





- To clean ceramic surfaces and other materials.
- Float with three different roughness replaceable pads; soft (red), medium (blue) and hard (brown).
- · Float with three very stuff pads (white).
- 3 sets of pads: very soft (white), soft (red), medium (blue) and hard (brown).
- Available set of 3 pads of different roughness: soft (red), medium (blue) and hard (brown).



	REF.		=
FLOAT + 3 MIXED PADS	20900		
FLOAT + 3 VERY SOFT PADS	20944		
3 PADS REPLACEMENT SET - VERY SOFT	20971	25.40.25	
3 PADS REPLACEMENT SET - MEDIUM	20973	25x10x2.5 cm	1
3 PADS REPLACEMENT SET - HARD	20974		
3 PADS REPLACEMENT SET - SOFT/MEDIUM/HARD	20902		



 $\times \times$































 DIFFERENT MODEL OF WASHBOYS FOR CLEANING AWAY GROUT OR FINAL CLEAN OF TILING JOB.





RUBICLEAN TRIPLE SUPERPRO

- Plastic washboy, lightweight and high resistance.
- Equipped with 3 spiral rollers for further draining.
- · Includes wheels and carrying handle.
- Capacity: 5.3 gl. (24 l.)
- · Useful capacity: 2.2 gl. (10 l.)
- Dimensions: 20 7/8" x 11 1/32" x 14 9/16" (53 x 28 x 37 cm).
- Supplied assembled and in 1 unit box.

	REF.	=		
RUBICLEAN TRIPLE SUPERPRO WASHBOY	21995	1	18	



SUPERPRO



RUBICLEAN SUPERPRO

- · Plastic washboy, light and heavy duty, with two squeeze rollers and separationdecantation system of sewage.
- · Includes wheels and carrying handle.
- · Capacity: 5.3 gl. (24 l.)
- · Useful capacity: 4.2 gl. (19 l.)
- Dimensions: 20 1/2" x 10 5/8" x 12" (52 x 27 x 30 cm).
- · Supplied assembled and in 1 unit case.
- · Available in Palbox of 10 units (Ref. 69964).

	REF.	=	
RUBICLEAN SUPERPRO WASHBOY	21998	1	18

SUPERPRO



RUBICLEAN SUPERPRO 2 SET

- · Consisting of:
- · RUBICLEAN SUPERPRO washboy (Ref. 21998).
- · Sponge float SUPERPRO (Ref. 20924).
- Termoflex rubber grout float SUPERPRO (Ref. 65976).

	REF.		
RUBICLEAN SUPERPRO 2 SET	69915	1	18









RUBICLEAN EASYPRO

- · Lightweight, strong plastic bucket.
- · Lower grate level. Requires less water. More lightweight.
- · Removable rollers. Easier cleaning.
- Metal reinforcement on the rollers. Greater resistance.
- · Capacity 24 litres.

	REF.	=	
RUBICLEAN EASYPRO WASHBOY	21945	4	24





RUBICLEAN PRO

- · Plastic washboy with two squeeze rollers.
- · Wheels built into the base.
- · Capacity: 5.3 gl. (24 l.)
- · Useful capacity: 3.7 gl. (17 l.)
- Dimensions: 20 1/2" x 10 5/8" x 10 1/4" (52 x 27 x 26 cm).
- · Supplied assembled and in 1 unit case.
- · Available in Palbox of 12 units (Ref. 69948).

	REF.	=	
RUBICLEAN PRO WASHBOY	25949	1	18



RUBICLEAN PRO 1 SET

- · Consisting of:
- · RUBICLEAN PRO washboy (Ref. 25949).
- · Sponge float PRO (Ref. 24974).
- Grout float PRO 11"x5"x13/32" (28x14x1cm) (Ref. 24969).

	REF.	=	
RUBICLEAN PRO 1 SET	68902	1	18





RUBICLEAN PRO 2 SET


- Consisting of:
- RUBICLEAN PRO washboy (Ref. 25949).
- Float with replaceable SWEEPEX SUPERPRO sponge (Ref. 22916).
- · Rubber grout float SUPERPRO (Ref. 65971).
- · 45° Notched trowel 11" (28 cm) 13/32"x13/32" (10x10) (Ref. 75948).

	REF.	=	
RUBICLEAN PRO 2 SET	69949	1	18





RUBI CLUE

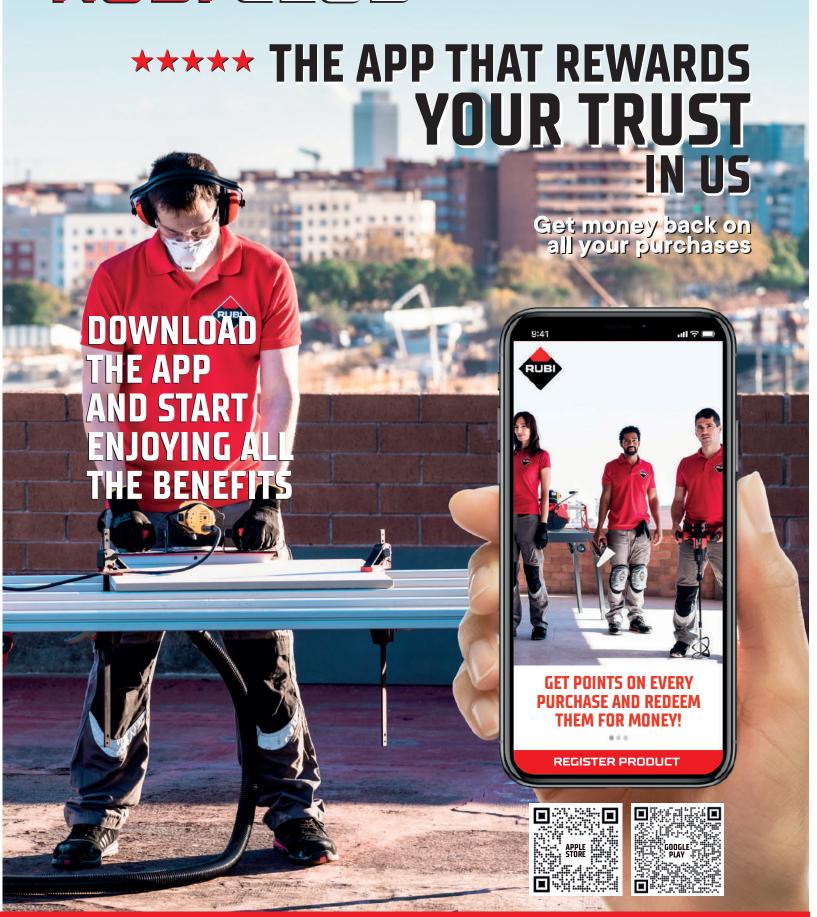

DOWNLOAD IT AND START ACCUMULATING POINTS

Scan the QR code or find it in app stores





SYMBOLOGY AND CERTIFICATIONS

In this catalogue to provide reader's with the maximum amount of information and to be as clearly as possible, we have used the following symbols:



Ш	D CEN	Ч		CAIIU
read	er's with the	ma	ximum	amount of i
	Units per pallet		·	Segment Thickness
-	Units per box		<u></u> :	Diamond band height
\longleftrightarrow	Cutting length			Diamond band width
	Diagonal cutting length			Maximum drill length
	Cutting height			Mixing capacity
	Separator power			Max Height of the head
	Net weight without packaging		1	Rod's head diametre
*	Gross weight			Wide notched trowel
	With carrying case			Notched height trowel
	Weight with carrying case			Notched Radius Trowel
5	Power supply		18	Trowel length
RPM	Revolutions per minute		K,	Trowel width
W	Watts			Bags per box
TIMBE	Mitre cutting length		×13	N° tile spacers per bag
, dimm.	Mitre Thickness cut			Height of bucket
x2	Maximum cutting thickness - 1 stroke or 2			Bottom diameter
	strokes Length Width Height (machine		<u></u>	Top diameter
(P)	overall dimensions) Wall chaser			Useable height
	Cut length with saw effect			Sponge size
<u> </u>	With blade		\bigcirc	Absorption level (1-4)
	Outside diameter			Resistance to abrasion (1-4)
(i)	Inside diameter			

	Cutting Length	4	Folding legs
	Cutting height		Mobile cart
*	Separator power	<u>چ</u>	Adjustable flow
<u>e</u>	Fixed separator	2	Tip-up table
	Mobile separator	ES.	Zero Dust
	Repetitive cuts	س	Level
	45° cuts	*-	Laser
	Base accessory	C)	C3 system
1	Angular measuring	\Diamond	Wet cutting
	Dual reinforced guide	\otimes	Dry cutting
	PURE POWER	1	1 hour of continous wor maximum,
	MAGNET	3	recommended by TNO 3 hours of continous work maximum,
	Smart Power		recommended by TNO
į	One Hand Action		
	Back pack optional		
þ	Bearing system		
1	Easy fix		
	Ergonomic		
0	Soft		
	INCH/MM. ruler		
]0	Power		
<u></u>	Foldable head		

Plunge Effect

Rubi Group comply with the Directive 2002/96/EC on waste electrical and/or electronic and Directive 2002/95/EC on the restriction of certain substances in their manufacture, applying the law of each member state according to EEC your specific criteria. [WEEE, WEEE, ECDRAEE, etc...] [RoHS].

Images are for illustration purposes and may change without notice.

high

Disc segment

Note: Any reproduction of all or part of this catalogue without prior approval of Germans Boada, SA is forbidden



E 34

^{*}The gross weight of some electrical machines may vary depending on the type of pallet and carton type used in packaging.

^{**}Any manipulation or modification of machine voids the warranty. Our warranty covers defects in manufacturing or assembly in accordance with the applicable law.



RUBICLUB

JOIN THE COMMUNITY OF 70.000+ EXPERTS IN THE ART OF TILING

- 1. SIGN UP IN LESS THAN 1 MINUTE
- 2. EXTEND THE WARRANTY OF YOUR PURCHASES EASILY
- 3. GAIN ACCESS TO EXCLUSIVE BENEFITS AND GIFTS

SCAN THE QR CODE OR ENTER WWW.RUBI.COM





After Sales Service aftersales@rubi.com



rubi.com

RUBI GROUP

GERMANS BOADA, S.A. BARCELONA (OFICINAS CENTRALES)

Pol. Can Rosés, Avda. Olimpiades 89-91, P.O.BOX 14 08191 RUBI (Bacelona) SPAIN T. 34 936 80 65 00 info@utbi com

MADRID

Thomas Edison 4 Bloque 2 Planta 1 Oficina 2110 T. 34 914 99 48 63 28521 Rivas Vociamadrid SPAIN

PT RUBI PORTUGAL

Rua da Ribeira de Eiras, S/N, Armazén Ponte de Eiras 3020-324 Coimbra - PORTUGAL T. 351 239 492 430 F. 351 239 492 431 rubiportugal@rubi.com

RUBI FRANCE S.A.R.L.

Bâtiment le Vancouver 91940 LES ULIS - FRANCE T. 33 1 69 18 17 85 T. 33 1 69 18 17 89 rubifrance@rubi.com

RUBI TOOLS USA Inc

10702 NW 147th Street, Suite 100 Hialeah Gardens, FLORIDA 33018 USA P. 1 305 715 9892 F. 1 305 715 9898 rubitools usa@rubi com

UK RUBI UK LTD.

Units 16 & 17, Easter Park,
Ferry Lane
Rainham, Essex
RM13 9BP - UNITED KINGDOM
P. 44 (0) 1708559609
F. 44 (0) 1708553813

RUBI POLSKA Sp. z o.o.

ul. Dawidowska 10, Zamien 05-500 Piaseczno POLSKA T. +48 (0) 226 44 51 61 F. +48 (0) 226 44 58 45

RUBI BENELUX BV

Weidehek, 70

LU 4824 AS BREDA
NEDERLAND

BE T. 31 (0) 76 57 29 200

DE RUBI DEUTSCHLAND GmbH

AT 41066 Mönchengladbach DEUTSCHLAND T. 49 (0) 2161 970 60 90 F. 49 (0) 2161 478 12 69 rubideutschland@rubi.com

RUBI ROSSIA

моб. +7 903 153 30 46 тел.: +34 936806500 факс: +34 936806501 rubirossia@rubi.com

CA RUBI CANADA

9209 Boul Langelier St-Léonard, Qc CA H1P-3K9 P. 1866 898 7924

IT ITALIA

F. 800 788279 commerciale@rubi.c

Suzhou Rubi Technologies Co. ,Ltd.

Block 2, No.86, Tinghe Road, SIP, Suzhou City, Jiangsu, Province, China Zip Code: 215121 中国江苏省苏州工业园区享和路86号2号厂房苏州瑞比机电科技有限公司邮政编码: 215121

IN RUBI INDIA

Andheri Kurla Road, Andheri (East) Mumbai-400059, India T.+91 22 67587457 60 rubiwestindia@rubi.com

MX GERMANS BOADA MEXICO

Av. Industria Moderna #2001 Bodega 82, El Cerrito, CP 76240 El marqués, QRO T: +52 55 5592 4907 T: +52 55 5592 5386

RUBI COLOMBIA

Cra. 11a #94-56, Oficina 501 Bogotà D.C. COLÒMBIA T. (+571) 749 85 08

CL RUBI CHILE

GERMANS BOADA S.A.
Los Militares # 5620, Oficina 1503
Los Condes (Santiago de Chile) CHILE
T. (+562) 3339 9193
T. (+569) 9799 9574
rubichile@rubi.com

AE RUBI MIDDLE EAST

P.O. Box 507070, Unit 08A, Level 7, Al Fattan Currency House-Tower 1, Dubai IFC, Dubai, United Arab Emirates nkhan@rubi.com T. +971 52 969 7852

FSC

TR RUBI TURQUIA

TAMER OZALLI Hird. Hizm.
Fulya Mah: Mehmetcik cad Kozacik sok
Birlik ap D.3 Sişli / İstanbul
T. +90 50 7624 0167
tozalli@rubi.com

Ref.93278

