





























	<b>^</b>		
RI		31	
	<b>/</b>		

01.	Manual tile cutting
8	Manual Tile Cutters
12	Scoring wheels and accessories for manual cutters

02.	Circular saw
14	Cutting

03.	Handling and Installing
18	Handling
20	Installing

04.	Electric tile cutting
30	Electric cutters and mitre saws
38	Accessories

05.	Diamond blades
42	Dry and wet cutting diamond blades

06.	Drilling
45	Tools for drilling ceramic tile


























Grinding & polishing

07.

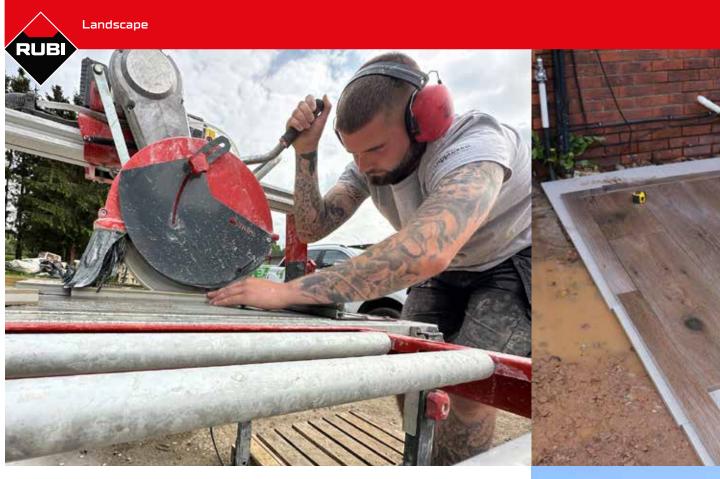

## LANDSCAPE


As a leader in the field of professional tile installation tools, RUBI Group constantly develops new solutions based on the market and the needs of the professional trades' person.

We produce high-quality tools and accessories that make the demanding work tilers, landscapers and construction workers carry out as easy and hassle-free as possible.

As the materials used in the landscaping market has evolved and developed, we recognised a need to produce products that are capable of performing to the high quality that is now expected within the industry. Materials such as 20mm porcelain require specialist tools for the professional to make accurate cuts with a high-quality finish.

From internal bathroom and kitchen tiles to large format wall tiles and porcelain paving slabs, RUBI continues to be at the forefront of the industry.



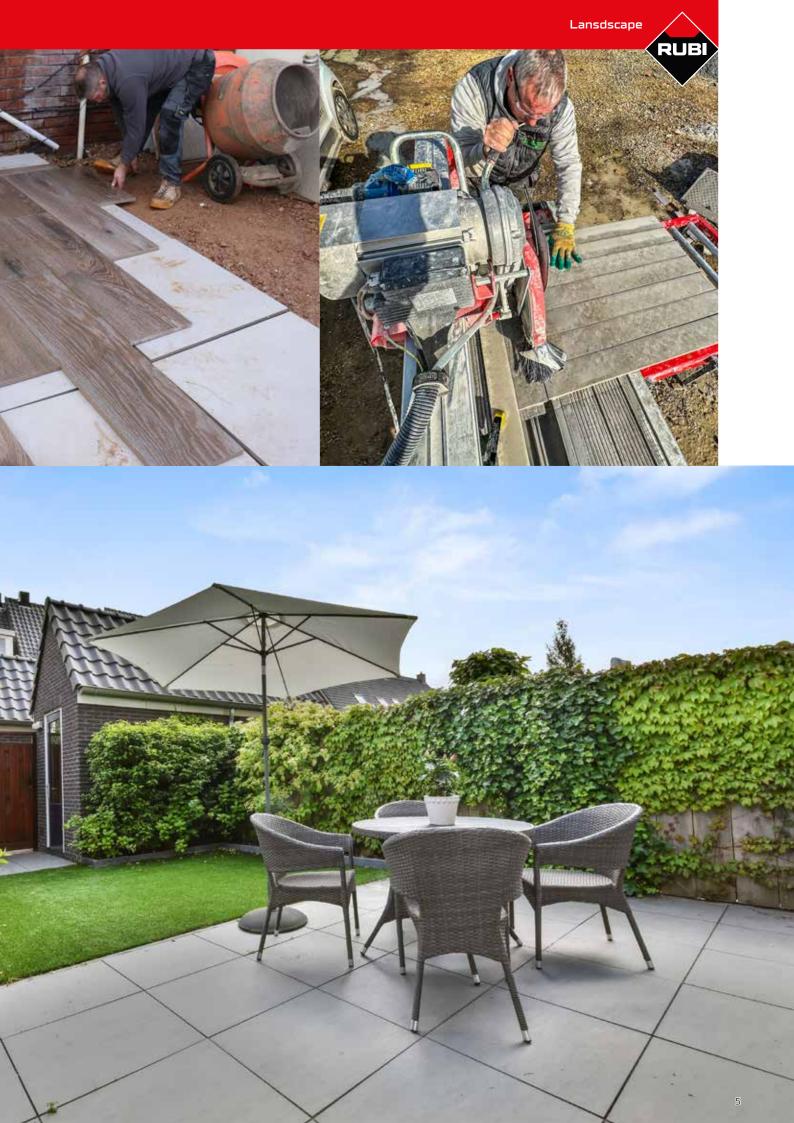



## MANUAL TILE CUTTING

Manual Tile Cutters
Scoring wheels and accessories for manual cutters










#### MAXIMUM POWER, THE MOST ADVANCED MANUAL CUTTER ON THE MARKET.

For intensive cutting of all types of ceramic tile, ideal for porcelain stoneware and extruded stoneware.

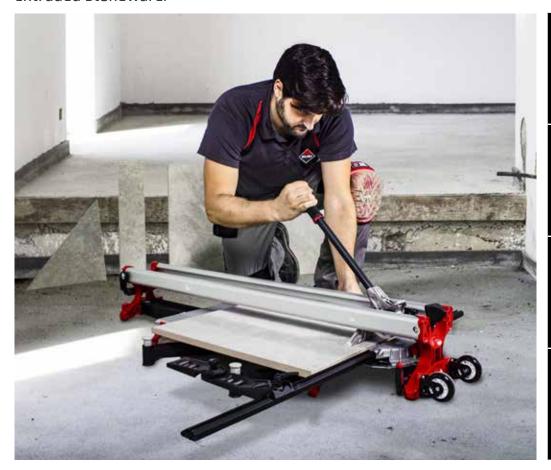





























- · Powerful breaking system (up to 1.500 kg), operable with just one hand.
- · Accurate with soft slider movements.
- · Large cutting capacity, up to 21mm thickness. Ideal for large format tiles\*.
- · Robust with a foldable structure for high strength and easy transportation.
- Excellent performance breaking system: Clean cuts with soft motion.
- · Robust chassis, guides and breaking system.
- Swivel square with central pivot for fast and accurate measurements in angle cutting.
- Adjustable lateral stop for repetitive cuts.
- · Support base for excellent tile placement.
- Easy to transport: rubber wheels with bearings and handle.
- Interchangeable scoring wheels ranging from Ø 8mm –22mm.
- Includes Ø 8 mm SILVER and Ø 22 mm EXTREME scoring wheels. Reinforced textile bag for transport and protection.
- On models 1300/1550/1800:
- -The reinforced textile bag of these models includes 2 built-in wheels.











		ı
1.	2	-3-4-5
	Cut & Drill	

	REF.		$\longleftrightarrow$		and a	`		=	
TZ-850	17956	√	33 7/16"	24x24"	1/8-13/16"	3307 Lb	49.4 Lb	1	8
TZ-1020	17955	√	40 3/16"	27 9/16x27 9/16"	1/8-13/16"	3307 Lb	54.2 Lb	1	8
TZ-1300	17957	√	51 3/16"	35 7/16x35 7/16"	1/8-13/16"	3307 Lb	66 Lb	1	8
TZ-1550	17958	√	61 1/16"	43 5/16x43 5/16"	1/8-13/16"	3307 Lb	73 Lb	1	8
TZ-1800	17999	<b>V</b>	70 7/8"	47x47"	1/8-13/16"	3307 Lb	79.94 Lb	1	8

\*Some materials with a thickness greater than 15 mm may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibility and alternatively suggest cutting these types of material using an electric tile cutter.

ACCESSORIES



**REF.** 18980 Maintenance Kit



































## TX-MAX

#### PROFESSIONAL MANUAL CUTTER WITH HIGH-PERFORMANCE MULTIPOINT BREAKER.

For intensive cutting of all types of ceramic tile, ideal for porcelain stoneware and extruded stoneware.























- · Highly precise scoring.
- · Entire system highly efficient.
- · Reinforced components. Heavy duty.
- · High breaking power (1,200 kg) MASTER POWER. One-handed operation.
- Head with extra-long aluminium sliders with "self-lubricating" friction bearings.
- · Portable breaker with aluminium pressure pad, equipped with plastic protector to avoid marking delicate surfaces. Better visibility of the scoring and cutting zone.
- · The pressure pad is locked by a ratchet mechanism and is unlocked by the trigger, allowing one-handed scoring and breaking for faster use. Increases performance with both thin and thick materials.
- Injected-aluminium base, reinforced with a central rib, for increased strength.
- · Floating tables and supplementary arms for large-size ceramic tile, increasing cutting stability.
- · Rotating square, with central pivot point and lateral end stop. Greater precision in angle cuts.
- Handle with soft grip for better ergonomics and comfort.
- Equipped with Ø 8 mm SILVER and Ø 22 mm EXTREME scoring wheels. Compatible with the entire plus line of scoring wheels.
- · Includes a carrying case (the 1250 model is equipped with wheels to transport the machine).











		ı
1.	2	-3-4-5
	Cut & Drill	

	REF.		$\longleftrightarrow$		and a			=	
TX-710 MAX	17910	√	27 15/16"	20x20"	1/8-13/16"	2646 Lb	29.3 Lb	1	10
TX-1020 MAX	17916	√	40 3/16"	27 9/16x27 9/16"	1/8-13/16"	2646 Lb	42.8 Lb	1	10
TX-1250 MAX	17922	√	49 3/16"	33 7/16x33 7/16"	1/8-13/16"	2646 Lb	57 Lb	1	10

<sup>\*</sup> There are some materials over 15mm thick which, due to their physical properties, possible inner or surface tensions, are difficult to cut manually. It is recommended to make some sample cuts to determine the compatibility of the product.

ACCESSORIES



**REF.** 18980 Maintenance Kit

















\_

××















## **PREMIUM SCORING WHEELS**

PLUS SCORING WHEELS FOR TZ & TX-MAX PROFESSIONAL CUTTERS.







EXTREME



#### 22MM SCORING WHEEL PLUS (0 7/8") EXTREME

- For ceramic walls, ceramic floor, porcelain and rustic ceramic floor, ideal for Highly textured and structured surfaces.
- Tungsten carbide scoring wheel with a superficial titanium treatment.
- · Mounted on bearing. Enhanced smooth user perception.
- · Extra-long life.

	REF.	=	
22MM SCORING WHEEL PLUS EXTREME (0 7/8")	01900	10	

## **ACCESSORIES FOR MANUAL TILE CUTTERS**







#### **MAINTENANCE KIT**

 Cleaning, lubricating & maintenance oil suitable for regular maintaining of cutter parts that are regularly used; guides, sliding system, tilted axes, spiral, metallic surfaces.

	REF.		
MAINTENANCE KIT	18980	8	640





## CIRCULAR SAWS

CIRCULAR SAW RAIL CUTTERS

Cutting






TC-125 G2 CIRCULAR CUTTER + GUIDES

#### CIRCULAR CUTTER, SMOOTH AND PRECISE, IDEAL LARGE FORMAT TILES.

For cutting ceramic and porcelain tiles. Suitable for use with natural and synthetic stone. Especially suitable for large format tiles.



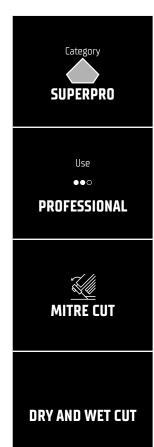



















- · Equipped with a carbon steel slide on adjustable double set stainless steel radial bearings.
- · Double dust reduction/control system. Dry and wet cutting.
- · Height-adjustable cutting head (saw effect), hinged from 0° to 45°. (mitre). FAST adjustment system.
- More ergonomic. Additional BI-MATERIAL handle, mainly for mitre cuts.
- Compatible with discs of 5" (125 mm) or 4-1/2" (115 mm) diameter. (Suitable for discs with reinforcement plate, VIP type).
- Switch with SAFETY lock. Prevents UNINTENTIONAL start-up. Electrical cable with PRCD.
- Direct connection to vacuum cleaner. Includes adapter for other models and brands 17/16", 15/8" and 2" (37, 42 and 50 mm) diameter.
- · Quick connection and regulating valve for hose (16 mm diameter). Rubber stopper for suction outlet. IMPROVES ergonomics during wet cutting.
- · Cast aluminium disc protector with transparent polycarbonate cover with quick opening and closing system. FACILITATES disc change and MINIMISES the projection of particles and water.
- Tilting side guard for mitre cuts. REDUCES water splashing and IMPROVES dust suction.
- The kit of TC-125 + GUIDES KIT TC-125 G2 (necessary) includes: two 61" (155 cm) guides, one 25 9/16" (65 cm) guide, 1 TC-125 cutter, 1 Ø5" disc, 2 fixing suction cups, 2 clamps, 2 spacers, 1 vacuum cleaner adapter, 1 carry case and 1 carrying bag.
- FACILITATES transport and handling.

KIT TC-125 G2 120V 50/60HZ USA [Ref: 51977+51949]														
	REF.		5	RPM	W	$\longleftrightarrow$	Suited .	, dillin	Q	<u></u>			-	
TC-125 G2 120V 50/60HZ USA	51977	ام	110-130V 50-60Hz	13800	1250	126"	13/16-1"	9/16-11/16"	4 1/2-5"	7/8"	14 3/16x9 5/8x8 1/4"	31 Lb	1	
GUIDES KIT TC-125 G2	51949													

The kit is a cutter reference (Ref.51977) + the guide reference (Ref.51949). It must be used with the SLIM SYSTEM G2 guides.





## CUTTING







#### SLIM CUTTER G2 SUPPLEMENT GUIDES

• Aluminum guides for the G2 system.

	REF.	=
SLIM CUTTER G2 SUPPLEMENT GUIDE 25 9/16" (65 CM)	52948	1
SLIM CUTTER G2 SUPPLEMENT GUIDE 61" (155 CM)	51999	1















XX









# HANDLING AND INSTALLING

Handling Installing





### **SLAB TRANS MINI**

## FOR TRANSPORTING CERAMIC SHEETS AND LARGE-FORMAT TILES WITH A MAXIMUM RECOMMENDED SIZE OF 60X60" (150 X 150 CM).



- · Ideal for medium formats. It adds less weight to the tile conveyor assembly when transporting medium-sized formats.
- · Retractable aluminium guide. Allows us to handle and transport tiles 39 3/8" (100 cm) and 83" (210 cm) in size. Especially recommended for formats of up to 60x60" (150 x 150 cm), 1/4" or 5/16" (6 or 8 mm) thick, used diagonally.
- · Highly reinforced, adjustable and removable soft-grip handles. With an anti-twist and soft-grip system which ensures a better grip of the assembly.
- · 2 interchangeable Ø8" (20 cm) suction cups, can be placed at any point on the guide.
- Suction cups with a safety indicator.
- Each suction cup, of Ø8" (20 cm) in diameter and with a high-load capacity, has an indicator that warns us in the event of a loss of suction
- The suction cups have a protector to prevent damage during transport.
- $\boldsymbol{\cdot}$  With a maximum load capacity of 88 lb (40 kg) at their maximum length.
- · Maximum load capacity: 121 lb (55 kg).

	REF.	Ċ	*		=
SLAB TRANS MINI	18983	18.3 Lb	24.7 Lb	90 15/16x10 1/4x7"	1



## **RHINO TROLLEY**

#### TRANSPORT AND HANDLING SYSTEM FOR LARGE TILES.

Easy to transport due to its small size.



- Very manageable and good stability thanks to its 4 wheels. It has a safety lock on the wheels to prevent undesirable movements.
- It can be transported on any type of surface, thanks to its large 160 mm diameter wheels.
- $\cdot$  40 cm wide platform. It can transport tiles and boxes of up to 40 mm thickness.
- · Maximum load capacity 250 kg.
- · Rubber cover to protect the tiles.
- · Compatible with the transporters.

	REF.		Ċ	=	
RHINO TROLLEY	28912	35 7/16x17 1/16x10 15/16"	22 Lb	1	























## **SLAB TABLE VERSA-TILE**

## WORK BENCH FOR CUTTING AND HANDLING LARGE-FORMAT CERAMIC SHEETS, SPECIFICALLY DESIGNED FOR THE SLAB RANGE OF TOOLS.





- Thanks to the shape of the legs and its structure, the table is very stable and sturdy even in its widest position. The adjustable feet ensure this stability, even on uneven floors.
- Dimensions in working position: The table is extendable from 43 3/10" to 59 5/8" (1100 to 1515 mm), which allows you to handle the widest formats. Its length is 71" (1 800 mm).
- Its folding legs and two side wheels make it easy to transport and store.
- Double working height: 27 9/16" and 33 1/6" (70 and 84 cm), which means it can be adapted to different needs, allowing all types of work to be carried out.
- Maximum load capacity: 573 lb (260 kg). Even the largest tiles can be loaded.
- Thanks to its two movable bars and wide T-shaped profiles, you can have a support surface that allows you to work as if on a workbench for the use of smaller tools, such as hand-held cutters, for example.

	REF.		Ů	*	=	
SLAB TABLE VERSA-TILE	18984	70 7/8x60 1/4x33 1/16"	90 Lb	98.3 Lb	1	9







## **HANDLING**







#### **SLAB TABLE LENGTHEN ACCESSORY**

• Accessory for the SLAB VERSA-TILE TABLE, it allows you to extend the table up to 118" (3 m) while maintaining its basic features. Also compatible with the SLAB TABLE.

	REF.	=
SLAB TABLE LENGTHEN ACCESSORY	21931	1





#### **SLAB TABLE TILE LIFTING ACCESORY (C-15)**

- Makes it possible to lift the workpiece 13/4" (4.5) cm from the SLAB TABLE/SLAB VERSA-TILE TABLE profiles (only "T" profiles).
- Ideal for all types of cross-cutting and drilling on the table without the risk of damaging the profiles.

	REF.	=
SLAB TABLE TILE LIFTING ACCESORY (C-15)	21975	1





#### **SLAB TRANS MINI LIFTING ACCESSORY**

- · Slab trans mini accessory
- It allows us to hold the tile flat on the table during the back buttering operation when only one transporter is used. Exclusive for RUBI tables.

	REF.	- -
SLAB TRANS MINI LIFTING ACCESSORY	16909	2

















 $\Delta$ 

















#### **COMPACT MANUAL VIBRATOR.**

Especially designed for vibrating large format tiles.


















- ${\boldsymbol \cdot}$  Compact manual vibrator especially designed for vibrating large format tiles.
- · Expels the air trapped under the tile and maximises the adhesive coverage.(Do not use for a long period of time on the same tile to prevent the adhesive escaping.)
- · Suitable for use on floor and wall tiles.
- Compact and light design weighing just 11 Lb (4.8 kg) to facilitate work on walls.
- · Floating carbon steel chassis with vibration reduction system for greater user comfort.
- Folded 1/16" (1.5 mm) mm steel sheet chassis, powder painted in red.
- · Vibration plate made of PUR plastic, non-marking and easy to change.
- Easy to change, non-marking contact plate.
- · Easy to operate tool with ergonomic double grip.
- · Non-adjustable vibration frequency.

	REF.	5	RPM		ightharpoons	=
RUBI TRILLER USA	18978	110-130v 50/60Hz	2940	11 1/2x9 1/2x7 5/16"	10.6 Lb	1





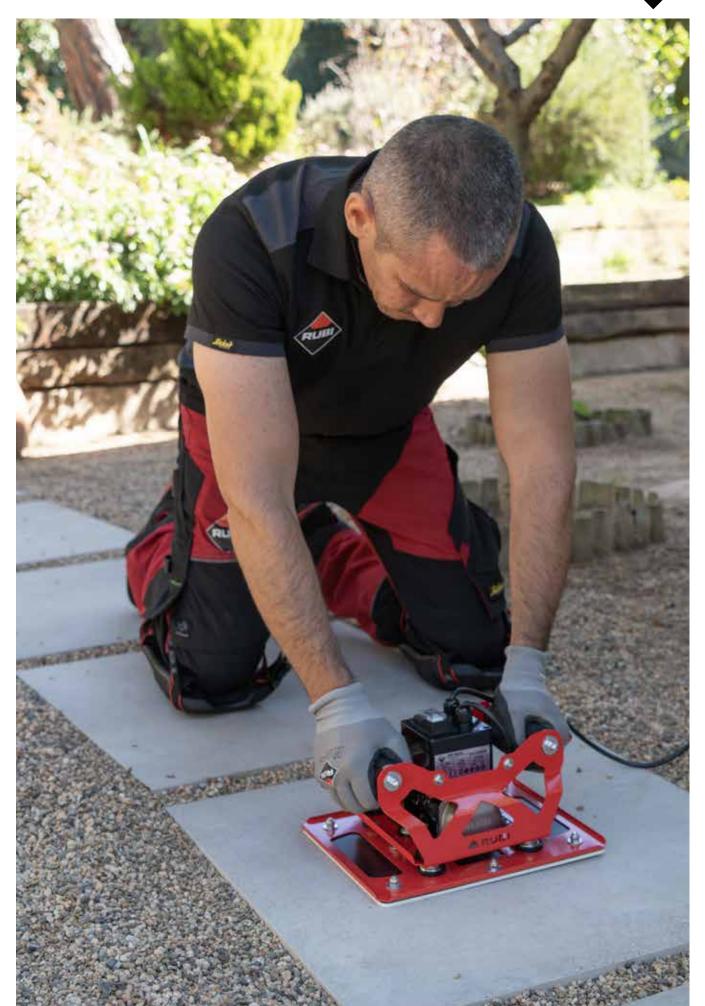






























## **RUBI TRILLER ENERGY CAS**

#### COMPACT MANUAL BATTERY-POWERED VIBRATOR.

Especially designed for vibrating large-format ceramic sheets.

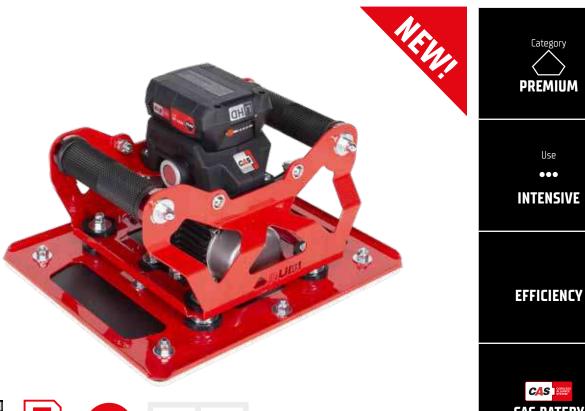











- Improves adhesion removing air pockets between substrate and tile.
- · Suitable for use on floor and wall tiling (suitable for vertical and horizontal application, floors and walls).
- Dry laying of concrete slabs and paving stones with polymeric sand and concrete tiles, paving and natural stone on wet cement outdoors.
- · Floating carbon steel chassis with vibration reduction system for greater user comfort.
- Folded 1.5 mm steel sheet chassis, powder painted in red.
- · Vibration plate made of PUR plastic, non-marking and easy to change.
- Easy to operate tool with ergonomic double grip.
- It has a speed regulator to adapt the vibration to the material and substrate being worked on. It includes a circuit breaker safety system.
- · Powered by a Li-HD 12V 4Ah battery (compatible with 12 V batteries from the Metabo CAS platform).
- · Includes Rubi BMS (Battery Management System), this is a quality electronic controller that protects the battery system from any overloads and overheating. Furthermore, it optimises the performance of the battery by offering a regular energy flow and extends the autonomy of use as well as the battery life.

	REF.	5	RPM			=
RUBI TRILLER ENERGY USA	10973	12V 4Ah	3000	9 1/2x11 1/2x7 1/16"	12.8 Lb	1
BATTERY CAS LIHD 12V 4AH	85904	12V 4Ah				1





## **QUAKE ENERGY CAS**

#### LIGHT AND COMPACT VIBRATOR

For tiles or porcelain sheets.



















- · Designed to prevent the generation of encapsulated air bubbles between the adhesive and the back of the ceramic tile, thus facilitating ideal adhesion between the adhesive and the tile.
- The low weight and wireless system make it easy to use on vertical supports and work at height.
- · The double handle with bi-material handle offers greater ergonomics and comfort to the user, and its geometry facilitates better control and stability of the tool during vibrating.
- The contact base with the ceramic tile does not leave marks and is easily replaceable.
- The front handle improves ergonomics and gives the user a better experience.
- · Powered by CAS Li-lon 18V 2Ah battery, compatible with Metabo brand battery tools and with all those that are part of the CAS 18V platform.
- It has a progressive on-off switch (rpm control).
- LED battery-charge indicator.
- New CAS platform LI-POWER 18V-2 Ah battery.

	REF.	5	RPM	$\bigcirc$	$\stackrel{\circ}{\Box}$		=
QUAKE ENERGY CAS USA	60938	18V 2Ah	10000 Max	5"	3.3 Lb	4 Lb	1
BATTERY CAS LIPOWER 18V 2AH	85901						1

















































#### BATTERY-POWERED SUCTION CUP FOR THE HANDLING OF CERAMIC TILES.

Adapts to the surface finish without leaving a mark on the tile.





















- Bi-material and ergonomic handle.
- Powered by CAS Li-lon 12V 2Ah battery, compatible with Metabo brand battery tools and with all those that are part of the CAS 12V platform.
- LED battery charge level indicator.
- · Maximum load capacity: 331 lb (150kg).\*
- Pressure release mechanism.
- · Load loss indicator (LED).
- In the event of a loss of pressure, the vacuum pump is automatically reactivated until the working pressure is reached again.
- $\cdot$  \*only on smooth surfaces and horizontal loading.

	REF.	5		Ŏ	*	=
OCTO-PLUS ENERGY CAS USA	66976	12V 2Ah	8"	2 Lb	3.3 Lb	1
BATTERY CAS LIPOWER 12V 2AH	85903					1





SUPERPRO

••• PROFESSIONAL

SECURITY

**USB BATTERY** 

#### **OCTO-USB ENERGY**

- · Battery suction cup designed for handling ceramic tiles.
- 3.7V battery integrated in the suction cup and charging via USB-C cable.
- In case of loss of pressure, the vacuum pump is automatically reactivated until it reaches working pressure again.
- · Maximum load capacity: 309 lb\* (140 kg).
- · Includes transport case.

	REF.	5	$\bigcirc$		*	=
OCTO-USB ENERGY	66967	3.7 V 1.2 Ah	8"	2 Lb	3.3 Lb	2

<sup>\*</sup> Only on smooth surfaces and horizontal handling





#### **SC-200 SUCTION CUP WITH VACUUM PUMP**

- · Suction cup for handling large and heavy tiles.
- · Adapts to any surface finish.
- · Suction applied by manual vacuum pump.
- · Load loss indicator (red mark).
- Pressure-release mechanism.
- · Maximum load capacity: 243 lb (110 kg).

	REF.	=
SC-200 SUCTION CUP WITH VACUUM PUMP	18919	1



○ PREMIUM VACUUM	SECURITY	NO MARKS
------------------	----------	----------

#### **GSC-200 GREY VACUUM SUCTION**

- Suction cup for the manipulation of large ceramic tiles and heavy porcelain slabs.
- · Adapts to any surface without leaving any marks.
- Fixing by vacuum manual pump.
- · Load loss indicator (red mark).
- Pressure release mechanism.
- · Maximum load capacity: 243 lb (110 kg).
- · High resistance plastic body.

	REF.	*	-
GSC-200 GREY VACUUM SUCTION	21951	3.3 Lb	1









# ELECTRIC TILE CUTTING

Electric cutters and mitre saws Accessories





## **DCX-250 XPERT**

#### PROFESSIONAL MOVING HEAD MACHINE FOR WET CUTTING WITH PLUNGE EFFECT.

For occasional cutting of natural stone such as marble or granite.





































- · Reinforced aluminium chassis with innovative triple beam system and steel sides. Improves the stability and rigidity of the chassis.
- · Reinforced cutting guide for a better cut finish.
- · C3-PYTHON System increases cooling efficiency and reduces water dispersion.
- · High performance plunge effect. Cutting height adjustment.
- · Includes transport handle and off-road type reinforced wheels, which provide better transportability and handling of the machine.
- Steel double settling system for improved efficiency and water recovery.
- Angular measurement with aluminium square adjustable from 0° to 60° for repetitive cuts.
- $\boldsymbol{\cdot}$  Includes reinforced folding legs with folding-prevention system and quick lock.
- External and easy to remove water tank with 8 gal (30 L) capacity.
- Includes improved splash guard system with auto-sliding protective cover.
- Patented ZERO DUST system exclusive to RUBI certified by the TNO, for safe exposure thanks to the reduction of the breathable dust particles generated during the cut.
- Ergonomic bi-material handle for comfortable operation of the cutting head. Earth integrated into the chassis.
- Includes Cobra 10" Blade. Supplied with cable.













	REF.	5	RPM	$\longleftrightarrow$			wind)	, dimma	<u></u>	$\bigcirc$	$^{\circ}$			
DCX-250 XPERT 1250	52962	230V-50Hz.230V-50Hz.	3350	49 3/16"	52 3/8"	35 7/16x35 7/16"	2 3/8 / 3 9/16"	1 15/16"	1"	10"	172 Lb	75 9/16x29 1/8x51 3/16"	1	**1
DCX-250 XPERT 1550	52972	230V-50Hz.	3350	61 1/16"	64 3/16"	43 5/16x43 5/16"	2 3/8 / 3 9/16"	1 15/16"	1"	10"	190 Lb	87 3/8x29 1/8x51 3/16"	1	**1

The cutting capacities can vary depending on the head position, special flanges and disc diameter.

ACCESSORIES



**REF.** 51927 Set of flanges 0170mm DC PYTHON/DCX



**REF.** Cables with plug







































## DX-350 N

#### MOBILE HEAD MACHINE WITH PLUNGE EFFECT FOR TOTAL VERSATILITY.

For all types of ceramic, porcelain tiles and building materials such as marble, granite, facade and fireproof bricks.









VERSATILITY



























- · Motor assembly mounted on sliding bearings for maximum precision and reliability. Perfect finishes.
- · Folding legs with integrated castors: Pyramidal orientation to improve the stability and safety of the machine.
- · Aluminium structure. Lighter cutter with maximum resistance to working conditions.
- · High performance plunge effect. Maximum cutting height.
- $\cdot$  Equipped with protective safety system for segmented blades.
- · With thermal security switch.
- Water pump cooling of blade with flow control valve.
- Diamond blade Ø 14" (350 mm) not included.
- · Allows the use of a Ø 12" (300 mm) blade.
- · Adjustable mobile head with plunge effect capability.
- · Motor on top and belt transmission.
- With lateral stop for repetitive cuts.
- · Aluminium working surface removable for easy cleaning.
- · Removable water tank system.
- 2mW line laser. Circular level for easy field installation.
- Includes Vip Turbo Mesh 12" Blade. Supplied with cable.
- · Supplied with ZERO DUST system already assembled. Also provided with a second anti-splash standard protector.









1. 2 .3.4.5

	REF.	5	RPM	$\longleftrightarrow$				and x2	<b></b>	$\bigcirc$		$\bigcirc$		
DX-350 N 1	<b>300</b> 52918	120V-60 Hz.	3400	52 3/16"	58 7/16"	41 5/16x41 5/16"	2 9/16"	4 1/8 / 8 11/16"	1"	12-14"	78x33 7/8x56 5/16"	220 Lb	1	**1

 $\label{thm:condition} \textbf{Cutting capabilities may vary depending on the head position, special plates and disc diameter.}$ 

ACCESSORIES



**REF.** 51916
Tile Fixer DV/DC/DCX/
DS/DX



**REF.** 51915 Set of flanges Ø184mm DX-350



**REF.** Cables with plug































## DC-250 PYTHON

#### MOVING HEAD MACHINE, VERSATILITY AND PRECISION

For cutting porcelain stoneware.







**VERSATILITY** 



























- · Motor assembly mounted on sliding bearings for maximum precision and reliability. Foldable at 45° for mitre. Direct drive motor.
- · Steel plate structure. Sturdy and maximum resistance to working conditions.
- · Patented ZERO DUST system exclusive to RUBI and certified by TNO, for safe exposure because of reduction of respirable dust particles generated during cutting.
- · C3 Pyhton cooling system. New adjustable refrigeration system. Allows to adjust the point of water's fall depending on the material's thickness, getting a direct impact of the water in the cutting point. This allows to increase the refrigeration's efficiency and to reduce water dispersion.
- · Foldable legs with wheels for an easier transportation and removable tables for easy cleaning of the machine.
- $\cdot$  Adjustable aluminium square (0° 60°) with lateral stop for repetitive cuts at 0° and 45°.
- · Safety protector for turbo and segmented blades.
- Blade cooling by water (50W water pump) with flow control.
- Includes Red Cobra 10" Blade. Supplied with cable.









Cut & Drill

	REF.	7	RPM	$\longleftrightarrow$			ains)	iiiiiii	$\odot$	$\odot$			$\langle\star\rangle$	- W	
DC-250 PYTHON 850	56911	120V-60Hz	2790	33 11/16"	39"	27"	2 3/8 / 3 9/16"	2 3/16"	5/8"	10"	53 15/16x23 1/4x51 9/16"	120.2 Lb	153.2 Lb	1	**1
DC-250 PYTHON 1200	56914	120V-60Hz	2790	42 1/2"	48"	33"	2 3/8 / 3 9/16"	2 3/16"	5/8"	10"	63 3/4x32 5/16x51 9/16"	131.28 Lb	165 Lb	1	**1

The cutting capacities can vary depending on the head position, special flanges and disc diameter.

ACCESSORIES



REF. 57941 Table Extension DV/DC/ DCX/DS/DX



**REF.** 51914 Roller Table Extension DU/ DC/DCX/DS/DX (from 2013)



**REF.**Cables with plug































## **DT-10IN MAX**

#### TRANSPORTABLE ELECTRIC CUTTER WITH MITRE EFFECT. GOOD FINISH.

For cutting stoneware, tiles, ceramics, refractories and other materials.









FAST

















- · Python cooling system combined with the Zero Dust system, keeps your work area clean by reducing the production of splashes.
- · It incorporates a tubular steel support with wheels and foldable, to transport the machine easily.
- $\cdot$  With lateral stop for repetitive cuts with adjustment from 0° to 45° and magnetic support for for the blade key.
- · Diamond blade for fast, smooth cuts with a long service life.
- Laser indicator to facilitate ceramic placement and obtain more precise cuts.
- Tilting cutting head adjusts for precise 22.5° and 45° bevel cuts.
- Tank with level indication min. and max. Maximum capacity: 5 gal. (19 l).
- It incorporates an aluminum table with a rubber surface with a cutting capacity of 35 1/2" (90 cm).
- Available accessory Ref. 58916 that extends the table up to 48" (120 cm).
- Includes Arrowhead 10" Blade. Supplied with cable.











	REF.	5	RPM	$\longleftrightarrow$			, dililin		$\bigcirc$		Ĉ	
DT-10IN MAX	26994	120V-60 Hz	4000	36"	24"	3 9/16"	1"	1"	10"	63x368 1/8x48 7/16"	99 Lb	1

 $\label{thm:cutting} The \ cutting \ capacities \ can \ vary \ depending \ on \ the \ head \ position, \ special \ flanges \ and \ disc \ diameter.$ 

ACCESSORIES



**REF.** 58916 EXTENDABLE TABLE DT – 10IN MAX



REF. 58917 Set of flanges for DT-10IN MAX

































# **ACCESSORIES FOR ELECTRIC CUTTERS**



 $\overline{}$ 



#### SUPERPRO



#### **CLEANING BLOCK**

· For cleaning of diamond blades.

5





#### **N-CLEANING BLOCK**

• Specifically designed to bring back the diamonds on the rim of diamond blades when cutting porcelain.

	REF.	=
N-CLEANING BLOCK	05974	5

#### **SUPERPRO**



#### SET OF FLANGES FOR MITRING CUTS.

- · To reduce saw flex in miter cuts.
- · Available in several models.
- · Flange for reinforced saws.

Trange for reinforced saws.	REF.	=
SET OF FLANGES 0184MM DX-350	51915	
SET OF FLANGES 0170MM DC PYTHON/DCX	51927	1
SET OF FLANGES 0130MM DV/DC/DCX/DX-250	57991	

#### **SUPERPRO**



#### TILE FIXER DV/DC/DCX/DS/DX

- · Allows the fixing of the tile during cutting, thus avoiding sudden movements.
- · Accessory adaptable to DV,DC,DS and DX series (up to 2009).

	REF.	=
TILE FIXER DV/DC/DCX/DS/DX	51916	1



#### **ROLLER TABLE EXTENSION**

- With rollers to simplify movement of the tiles.
- · With adjustable foldable legs.
- $\cdot$  Work surface 26 9/16"x22 5/8" (675x575mm) and maximum weight 154lb (70kg).
- · Installation on both sides of the machine.

	REF.	( <u></u>
ROLLER TABLE EXTENSION DU/DC/DCX/DS/DX (FROM 2013)	51914	1



#### ADJUSTABLE LENGTH LATERAL STOP DC/DCX/DS/DX

- $\boldsymbol{\cdot}$  For fixing large format tiles.
- Adjustable to the maximum length of electric cutter.
- $\boldsymbol{\cdot}$  Tile is held laterally thus avoiding any movement.
- Especially suitable for blocking and execution of repetitive miter.

	REF.	=
ADJUSTABLE LENGTH LATERAL STOP DC/DCX/ DS/DX	54844	1







#### LATERAL STOP FOR DC/DCX/DS/DX

• Facilitates positioning of the tile, while reducing the percentage of errors.

	REF.	=
LATERAL STOP FOR DC/DCX/DS/DX	54877	1





#### LASER & LEVEL KIT DV/DC/DCX/DS/DX

- · Kit includes:
- $\boldsymbol{\cdot}$  Circular bubble level to facilitate proper positioning of the electric cutter.
- Laser Tracer indicating the passage of the disc and facilitates placement of material.
- · Laser power: 2 mW
- · Laser Class: 2
- · Not compatible with DC-250 PYTHON models.

	REF.	=
LASER & LEVEL KIT DV/DC/DCX/DS/DX	54999	1































# DIAMOND BLADES

Dry and wet cutting diamond blades





# DIAMOND BLADES

#### · DRY & WET CUT.







○ PREMIUM

EXTRA LONG LIFE

#### **VIP TURBO MESH DRY**

- Recommended blade for cutting hard materials such as granite, rustic tiles, dekton, clinker, refractory, slate and porcelain tile.
- The turbo mesh design of the diamond band offers greater cutting speed on hard materials without sacrificing finish quality.
- 5/8" ring adapter included.
- · Thicker center to avoid vibrations and wobbling.

	REF.	Ö	<u></u>	( <del>)</del>	<u></u>	<u> </u>
VIP TURBO MESH DRY 4" USA	31926	4"	5⁄8" & 7⁄8"	1/16"	3/8"	1
VIP TURBO MESH DRY 4 1/2" USA	31927	4 1/2"	%" & %"	1/16"	3/8"	1
VIP TURBO MESH DRY 5" USA	31949	5"	%" & %"	1/16"	3/8"	1





quality 5.0 \*\*\*\*\*
speed 4.5 \*\*\*\*

#### ○ PREMIUM EXTRA

#### **EXTRA LONG LIFE**

#### **VIP TURBO MESH WET**

- Recommended blade for cutting hard materials such as granite, rustic tiles, dekton, clinker, refractory, slate and porcelain tile.
- The turbo mesh design of the diamond band offers greater cutting speed on hard materials without sacrificing finish quality.
- 5/8" ring adapter included.
- · Thicker center to avoid vibrations and wobbling.

	REF.	$\bigcirc$	<u></u>	<u>•</u>	<b></b>	
VIP TURBO MESH WET 7" USA	31929	7"	%" & %"	1/16"	3/ <sub>8</sub> "	1
VIP TURBO MESH WET 8" USA	31940	8"	%" & 1"	1/16"	3/ <sub>8</sub> "	1
VIP TURBO MESH WET 10" USA	31941	10"	%" & 1"	1/16"	3/ <sub>8</sub> "	1
VIP TURBO MESH WET 12" USA	31946	12"	1"	1/16"	3/8"	1
VIP TURBO MESH WET 14" USA	31947	14"	1"	1/8"	3/8"	1













#### ○ PREMIUM

#### **BLADE THICKER WET**

- For cutting all types of ceramic, porcelain and natural stone materials.
- For cutting thicknesses between 20mm (3/4") and 35mm (1-3/8").
- · Joint by laser welding.
- Extra-long life.
- Suitable for use on cutting tables and cut-off machines that incorporate guard systems in compliance with the standard for use of segmented blades.
- Special bonded alloy that provides a good finish with a very fast cutting speed.

	REF.	<u> O</u>	<u></u>	•	<u></u>	
THICKER WET 10" USA	32962	10"	%" & 1"	1/16"	3/8"	1
THICKER WET 12" USA	32963	12"	1"	1/8"	3/8"	1
THICKER WET 14" USA	32964	14"	1"	1/8"	3/8"	1





quality 4.0 \*\*\*\* speed 4.0

#### ○ PREMIUM

#### **ARROWHEAD TURBO**

- · Recommended blade to cut fine porcelain tiles.
- · Turbo blade. Turbo edge for faster cutting.
- · High Tech. High speed.
- · Use or wet or dry.

	REF.	<u>O</u>	<u></u>	•	<b></b>	
ARROWHEAD WET & DRY TURBO 4 1/2"	31916	4 1/2"	% & %"	1/16"	5/16"	1
ARROWHEAD WET & DRY TURBO 7"	30985	7"	% & %"	1/16"	1/16"	1
ARROWHEAD WET 10"	30994	10"	% & 1"	1/16"	1/16"	1





#### **BLADE BADGER MESH DRY**

- For cutting all type of hard materials as granite, slate, natural stone, quartz conglomerate, rustic stoneware, clinker, refractory, and all kind of porcelain tiles.
- This blade is a robust blade for heavy duty jobs and during cutting to counter any type of overheating, this blade has two ways for cooling.
- 5/8" ring adapter included.

	REF.	<u></u>	<u> </u>	· ·	<u></u>	
BLADE BADGE MESH DRY 4" USA	34900	4"	%" & %"	1/16"	3/ <sub>B</sub> "	1
BLADE BADGE MESH DRY 4 1/2" USA	34901	4 1/2"	%" & %"	1/16"	3/8"	1
BLADE BADGE MESH DRY 5" USA	34902	5"	%" & %"	1/16"	3/8"	1

















# DRILLING

Tools for drilling ceramic tile





# **DIAMOND DRILL BITS - DRY CUT**

• FOR DRY DRILLING OF WALL TILES, FLOOR TILES AND PORCELAIN TILES.



















	SUPERPRO	PORCELAIN TILE	⊕ GRINDER	₱ ELECTRIC DRILL WITHOUT PERCUSSION
--	----------	----------------	-----------	-------------------------------------

#### **DRYGRES DRILL BITS**

- $\boldsymbol{\cdot}$  For dry drilling in ceramic, porcelain, natural stone and other materials.
- $\cdot$  Maximum operating speed 14,000 r.p.m. 5/8" thread finish.
- They can be used both with grinders or drill without hammer, using the included adapter kit.
- Usable with grinder. Supplied in blister.

	REF.	RPM		=
DRYGRES DRILL BIT 0 1/4" (6 MM.)	05993	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 5/16" (8 MM.)	05932	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 3/8" (10 MM.)	05901	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 5/8" (12 MM.)	05933	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 3/4" (20 MM.)	05934	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 1 1/8" (28 MM.)	05902	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 1 3/8" (35 MM.)	05987	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 1 3/4" (43 MM.)	05936	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 2" (50 MM.)	05903	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 2 1/2" (65 MM.)	05937	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 3" (75 MM.)	05938	14000 max.	1 7/16"	1



SUPERPRO	PORCELAIN TILE	⊕ GRINDER	₱ ELECTRIC DRILL WITHOUT PERCUSSION

#### KIT DRYGRES

- They can be used both with grinders or drill without hammer, using the included adapter kit.
- The kit includes:
- MULTIDRILL guide with suitcase.
- Dry cutting diamond drill bits:
- Ø 1/4" (6mm), 3/8"(10mm), 11/8"(28mm), 13/8"(35mm), 2"(50mm).

	REF.	RPM		=
KIT 5 BITS DRYGRES	05996	14000 max.	17/16"	1



靣



# GRINDING & POLISHING

Bevelling, Grinding wheels and blades. Polishing pads.





### PRO-EDGER BEVELLING AND MITRING ACCESSORY

# PROFESSIONAL PORTABLE SYSTEM FOR INTENSIVE USE, ESPECIALLY DESIGNED FOR DRY BEVELLING AND MITRING PRINCIPALLY OF LARGE FORMAT TILES.

It can bevel and mitre porcelain, ceramic and any natural stone material of any length.



















- · It makes mitre cuts at 45° up to a maximum thickness of 3/4" (20 mm), and with no thickness limitation for bevelling.
- · Progressive bevelling and mitring at different depths to prolong the useful life of the grinding wheel and make bevelling easier for the user.
- $\cdot$  Compatible with (4 1/2" & 5") 115 & 125mm angle grinders with cable or battery that are easily and safely fitted thanks to the joint made with an 5/8" threaded shaft and quick-fastening belt.
- $\cdot$  Sealed high-speed bearings, to prevent the ingress of dust generated during the bevelling or mitring.
- · Highly wear-resistant polyethylene slides.
- $\boldsymbol{\cdot}$  A vacuum cleaner can be easily fitted for dust extraction (ZERO-DUST).
- · Quick and simple grinding wheel change.
- · Chassis with carbon steel sheet.
- · Highly friction-resistant white polyethylene slides
- · Plastic handle.
- Sealed single-row deep-groove ball bearings.
- · 45° x 3/4" grinding wheel included (ref. 16946).
- PVC plastic grinding wheel guard.
- $\cdot$  Fixing to angle grinder by means of a 5/8"-11" (Ref. 16901) and quick fastening belt.
- Progressive wear bevelling and mitring is adjustable by 3/8".
- · A damp cloth is recommended for cleaning.
- Water is not necessary for use.

	REF.			<b></b>	$ \bigoplus $		*	=	
PRO-EDGER PORTABLE BEVELING USA	16901	V	13/16"	5/8"	14 15/16x8 1/4x6 11/16"	9 Lb	9.9 Lb	1	24

ACCESSORIES



Fine Grit PRO-EDGER mitring Wheel



Turbo Twist Coarse Grit PRO-EDGER mitring Wheel



Fine Grit PRO-EDGER bevelling Wheel



## **ACCESSORIES FOR BEVELLING AND MITRING**









GOOD FINISH

#### FINE GRIT PRO-EDGER BEVELLING WHEEL

- · Grinding wheel for bevelling.
- Diamond grits fixed by means of a vacuum brazing system.
- Recommended for use with ANGLE GRINDERS between 9000 12000 rpm.
- Round finish available on 3/16" and 3/8" (5 and 10 mm) radius.
- · Internal diameter: 16.1 mm (M16 thread).
- For exclusive use with PRO-EDGER.

	REF.	$\odot$	$\bigcirc\!$	<del></del> ;	RPM	=
FINE GRIT R.5 PRO-EDGER BEVELLING WHEEL	16957	2 5/8"	0"	1/4"	12000 max.	1
FINE GRIT R.10 PRO-EDGER BEVELLING WHEEL	16958	3"	0"	7/16"	12000 max.	1









**GOOD FINISH** 



- · Grinding wheel for mitering.
- Diamond grits fixed by means of a vacuum brazing system.
- Recommended for use with ANGLE GRINDERS between 9000 12000 rpm.
- 45° type tool with 1/32"-3/32"(1-2 mm) edge.
- Internal diameter: 5/8" (16.1 mm) (M16.
- For exclusive use with PRO-EDGER.

	REF.	$\odot$	(w)		RPM	<u>-</u>
45X20 SMOOTH FINE GRIT PRO-EDGER MITRING WHEEL	16946	3 11/16"	0"	13/16"	12000 max.	1
45X15 SMOOTH FINE GRIT PRO-EDGER MITRING WHEEL	16985	3 5/16"	0"	9/16"	12000 max.	1









FAST

#### TURBO TWIST COARSE GRIT PRO-EDGER MITRING WHEEL

- Grinding wheel for mitering.
- Diamond grits fixed by means of a vacuum brazing system.
- Recommended for use with ANGLE GRINDERS between 9000 12000 rpm.
- The TURBO TWIST model can be used for grinding before finishing with a fine grit, as its grooved design can chip the tile profile.
- Internal diameter: 5/8" (16.1 mm) (M16 thread).
- For exclusive use with PRO-EDGER.

	REF.	$\bigcirc$	<u></u>	:	RPM	
TURBO TWIST COARSE GRIT PRO-EDGER MITRING WHEEL 45X15	16984	3 5/16"	0"	9/16"	12000 max.	1





# **GRINDING & POLISHING**







#### **GRINDING BLADES**

- · VACUUM BRAZED embossed plate.
- For edges and surfaces grinding of natural stone, all kind of ceramic tiles and paint or resin coatings.
- · For GRINDERS use.
- Maximum recommended speed: 15,300 RPM.
- Fine grinding finish (Ref.31974).
- Coarse grinding finish (Ref.31979).

	REF.	$\bigcirc$	<b></b>	$\odot$		RPM	<u>-</u>
VDF 100 FINE PRO	31974	4"	7/8"	1/16"	7/8"	15300 max	1
VDG 100 COARSE PRO	31979	4"	7/8"	1/8"	7/8"	15300 max	1







NO VIBRATIONS

**GOOD FINISH** 

#### **CUTTING & GRINDING BLADES**

- For cutting and grinding soft natural stone and ceramic tiles and synthetic materials.
- For adjustment cuts and grinding on all types of porcelain and hard materials.
- For materials with <3/4" (20 mm) thickness.
- Electroplated continous rim blade.
- Two-sided and reversible blade for a better performance.
- For grinders use. Connection: 5/8" thread.

	REF.	$\odot$	(m)	(*)	<b></b>		RPM	
ECD 4 1/2" 2IN1 SUPERPRO	31976	4 1/2"	5/8"	1/16"	1/4"	1"	13300 max	1
ECD 5" 2IN1 SUPERPRO	31977	5"	5/8"	1/16"	1/4"	1"	12250 max	1







































#### **STONE CUP WHEEL**

• Perfect for buffing work on any type of natural stone, especially granite and marble, and cured concrete surfaces.

	REF.	$\bigcirc$	(i)	
STONE CUP WHEEL	31921	5/8"	4"	1

# **POLISHING PADS**















#### **DRY POLISHING DIAMOND PADS**

- Range of floppy discs Ø100 mm for polishing, dry, of concrete, marble, granite and other ornamental natural stones.
- It allows removing scratches and surface damage quickly and easily.
- · Maximum operating speed: 3,000 rpm.
- · Different granulometry.
- # 50, # 100 and # 200 for roughing.
- # 400, # 800, # 1500 and # 3000 polishing and close the pore.
- · VELCRO® fastening blade to holder ref. 62986.

	REF.	Q	( <del>-</del>
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN # 50	61911		
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #100	61913		
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #200	61915		
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #400	61931	4"	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #800	61932		
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #1500	61933		
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #3000	61940		







NATURAL STONE

**QUALITY FINISH** 

#### DRY DIAMOND POLISHING PAD BUFF BL.

- $\cdot$  Ø100 mm floppy disc for the final buffing, dry, of concrete, marble, granite and other ornamental natural stones.
- Get a natural and long-lasting shine
- · Maximum operating speed: 3,000 rpm.
- VELCRO® fastening blade to holder ref. 62986.

	REF.		=
DRY DIAMOND POLISHING PAD 0100 MM BUFF BL.	61973	100	1










#### PAD SUPPORT FOR POLISHING AND BUFFING

- Fixing brackets for flexible polishing and buffing blades Ø100 mm.
- · Compatible with jobs dry and water-cooled.
- · VELCRO fastening.
- Connection polisher / grinder with M14 thread.

	REF.	Q	
SUPPORT FLOPPY PAD 0100MM M14	61934	4"	1



SUPERPRO	PORCELAIN TILE	QUALITY FINISH	LONG LIFE
----------	----------------	----------------	-----------

#### **MANUAL POLISHING PADS**

- Range of diamond rubber pads for roughing and edge polishing, cutting and surfaces of natural stone and ceramic tile.
- Semi-flexible. Good adaptation to the user's hand. Wet use is recommended.
- Different grit sizes: # 60, # 120 and # 200 for roughing, # 400 for polishing.
- Dimensions of the diamond plate: 2 3/16 x 3 9/16 (55x90 mm).
- Rubber pad dimensions: 2 5/16 x 3 11/16 x 1 3/16 (58x94x30 mm).

	REF.	=
DIAMOND POLISHING PAD GRAIN # 60	61974	10
DIAMOND POLISHING PAD GRAIN #120	61975	10
DIAMOND POLISHING PAD GRAIN #200	61976	10
DIAMOND POLISHING PAD GRAIN #400	61977	10































# MIXING

Electric mixers Mixing paddles



























# **RUBIMIX E-10 ENERGY CAS**

#### FREEDOM OF MOVEMENT.

For cementitious adhesives, resins, paints and other materials.
















- · Brushless motor. Maintenance-free and increases the product's lifespan. Maximum efficiency.
- Powered by a CAS Li-lon 18V 5.2Ah battery pack, compatible with METABO cordless tools and all of those that form part of the CAS 18V platform.
- · Light and strong. Maximum reliability.
- · Dual bi-material grip handle. Better ergonomics, comfort and stability.
- Equipped with a 2-speed gearbox.
- Progressive switch (RPM control) to optimise the mixing of each material.
- Switch safety lock prevents unintentional start-up.
- LED battery-charge indicator.
- · Connection to mixing paddles with M14 thread and FAST-IN adapter (included).
- Double-insulated motor.
















































# **RUBIMIX-9 SUPERTORQUE**

#### VERSATILE ELECTRIC MIXER, SUITABLE FOR CEMENTITIOUS ADHESIVES, RESINS, PAINTS AND OTHER MATERIALS.

Facilitates homogeneous mixing of the materials and prevents the creation of bubbles and/or lumps.



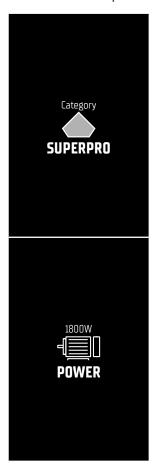









- · Electric mixer with high torque.
- · Electronic speed controller (rpm control) to OPTIMISE the mixing of each material.
- · Equipped with a mechanical 2 SPEED gearbox (450/780 rpm).
- · Better electrical SAFETY thanks to its double insulation.
- ATTRACTIVE and FUNCTIONAL Design.
- · Connection to mixing paddles with M14 thread.
- · Double handle with bi-material grip providing better ERGONOMICS, COMFORT and STABILITY.
- · Chassis in TECHNICAL, LIGHT, and STRONG plastic. Maximum RELIABILITY AND DURABILITY.
- · SAFETY on button. Prevents unintentional start-up.
- · Smooth start system.
- Direct access to the motor's brush housing for quick and easy maintenance.
- Includes mixing paddle with 3 helixes of 5 1/2" (140 mm) diameter for mortars and cementitious adhesives.
- Option to couple a Rubi fast-in adapter for paddles (NOT included).
- $\cdot$  Includes brushes and 3/4" and 7/8" (19 and 22 mm) spanners.
- · Compatible with chucks and range of mixing paddles RUBI.

	REF.	W	5	RPM	$\stackrel{\circ}{\Box}$		
RUBIMIX-9 SUPERTORQUE USA + CHUCK	26973	1800	120V-50/60Hz.	1ª 0-450 / 2ª 0-780	11.2 Lb	2	18



# **RUBIMIX-9 N**

#### VERSATILITY BY CHANGING THE MIXING PADDLE.

For cementitious adhesives, resins, paints and other materials.



- · Higher mixing performance, thanks to a more efficient torque.
- $\cdot$  2 speed gearbox and Electronic speed controller (R.P.M. regulation) to optimize the mixing of each material.
- $\cdot$  Quick and easy to change the brushes. High comfort.
- · Safety lock to prevent unexpected start.
- Power: 1200 W.
- Double insulation.
- Direct connection M14 thread.
- Electronic regulator (1st 0-650 r.p.m. / 2nd 0-850 r.p.m.). Ø maximum paddle: 5" 1/2 (140 mm).
- $\cdot$  Ø 4 3/4" (120 mm.) mixing paddle included.

	REF.		W	5	RPM	Ö		
RUBIMIX-9 N USA + CHUCK	24949	-	1200	110-130V 50-60 Hz.	1ª 0-650 / 2ª 0-850	12.3 Lb	2	24



















L

XX





































































# **MIXING PADDLES**

#### ADAPTABLE TO RUBI MIXERS AND OTHER BRANDS.



#### **MORTAR MIXER PADDLE THREAD M14 3 HELIX**

- · To mix cement mortars.
- $\cdot$  Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- · Less effort in mixing.
- · Less vibrations. Greater comfort.
- M14 x 2 thread connection.
- · Adaptable directly to RUBIMIX range and other brands.

	REF.		*	<u></u>	=
MORTAR MIXER PADDLE M-140-R 3H	76919	55-88 Lb	24"	5 1/2"	2
MORTAR MIXER PADDLE M-160-R 3H	76940	66-132 Lb	24"	6"	2





#### **MORTAR MIXER PADDLE THREAD M14 3 HELIX**

- · To mix cement mortars.
- Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- · Less effort in mixing.
- · Less vibrations. Greater comfort.
- M14 x 2 thread connection.
- · Adaptable directly to RUBIMIX range and other brands.

	REF.		*	<u>k</u>	=
MORTAR MIXER PADDLE M-120-R 3H LONG	26953	33-55 Lb	24"	4 3/4"	2



◆ PRO	TILE ADHESIVE	HIGHER Performance

#### **MORTAR MIXING PADDLE THREAD M14 3HELIX**

- To mix cement mortars.
- Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- · Less effort in mixing.
- Less vibrations. Greater comfort.
- M14 x 2 thread connection.
- · Adaptable directly to RUBIMIX-9/9 PLUS and other brands.

	REF.				=
MORTAR MIXER PADDLE M-100-R 3H	25978	33-44 Lb	21 5/8"	4"	2
MORTAR MIXER PADDLE M-120-R 3H	25979	33-55 Lb	24"	4 3/4"	6



RUBI



#### **EGGBEATER**

- $\boldsymbol{\cdot}$  To mix thinset, mortar, grout and other setting materials.
- $\boldsymbol{\cdot}$  Reduces the creation of bubbles.
- White zinc coating for rust protection.
- 27" hexagonal shaft.

	REF.	<u>}</u>	<u>.</u>	=
EGGBEATER	76908	5"	27"	6









# TOOLS FOR FIXING TILES AND FINISHINGS

Trowels and Brick Trowels

Templates, Mallets, Rubber grout floats and Work table
Octo-Plus and Suction cups





# **TROWELS AND NOTCHED TROWELS**

THE WIDE RANGE OF NOTCHED EDGES (SQUARED, TRIANGULAR, OR ROUNDED) IS ADAPTED TO ALL CERAMIC MATERIALS AND FORMATS AND DIFFERENT BONDING MATERIALS.
 NOTCHED EDGES AVAILABLE FROM 1/8" (3 X 3 MM.) TO 13/16" (20 X 20 MM.).





SUPERPRO OPEN HANDLE RUBIFLEX
-------------------------------

#### TROWELS & NOTCHED TROWELS OPEN RUBIFLEX HANDLE

- $\boldsymbol{\cdot}$  Steel plate special high wear resistance with corrosion protection by clear coat.(STEEL)
- Ergonomic RUBIFLEX handle with two textures.
- · Perfect flatness of the plate.

	REF.	ГГГ				
STEEL NOTCHED TROWEL 1/8"X1/8" (3X3 MM.)	76961	1/8"	1/8"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) 3/16"X3/16" [4.5X4.5 MM.]	76965	3/16"	3/16"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) 1/4"X1/4" (6X6 MM.)	76962	1/4"	1/4"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) 1/4"X13/32" (6X10 MM.)	76966	1/4"	3/8"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) 5/16"X5/16" [8X8 MM.]	76963	5/16"	5/16"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) 1/2"X1/2" (12X12 MM.)	76967	1/2"	1/2"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) R-13/32" (10 MM.)	76964	0"	0"	3/8"	6	270
STEEL NOTCHED TROWEL 28 CM. YW	72949	1/4 / 1/2"	5/16 / 1/4"	0"	6	270
STEEL NOTCHED TROWEL TRIANGULAR 1/4"X7/32" [6X5 MM.]	76976	1/4"	3/16"	3/16"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) 13/32"X13/32" (10X10 MM.)	769767	3/8"	3/8"	0"	6	270





#### **16" NOTCHED TROWELS**

- Double stainless steel for corrosion resistance.
- · Spread more adhesive with each pass.
- Ideal for tile with an edge 15" and large.

	REF.	LŢJ			=	
16" NOTCHED TROWEL 16" 1/2"X1/2"X1/2"	26976	1/2"	1/2"	1/2"	6	360
16" NOTCHED TROWEL 16" 1/4"X1/2"X1/4"	26977		1/4"	1/4"	6	360
16" NOTCHED TROWEL 16" 1/4"X3/8"X1/4"	26978	1/4"	1/4"	0"	6	360
16" NOTCHED TROWEL 16" 1/4"X1/4"X1/4"	26979	1/4"	1/4"	0"	6	360



























# **BRICK TROWELS**





#### PFP05

• Ergonomic RUBIFLEX.

	REF.	B	L	ightharpoons	=
PFP05-180 MM. (7 1/16")	75418	7"	4 1/8"	0.628 Lb	6
PFP05-200 MM. (7 7/8")	75420	8"	4 5/16"	0.703 Lb	6



#### PFP19

· Ergonomic RUBIFLEX.

	REF.	18	K.	Ċ	
PFP19- 80 MM. (4 5/16")	76808	4 5/16"	3"	0.335 Lb	6
PFP19- 90 MM. (5 1/16")	76809	5 1/16"	3 9/16"	0.37 Lb	6



#### PFP33

· Ergonomic RUBIFLEX handle.

	REF.	18	H,	ightharpoons	-
PFP33-170X50 MM. (6 11/16" X 1 15/16")	79050	6 11/16"	1 15/16"	0.34 Lb	6

# **TEMPLATE AND MALLET**

• TEMPLATE AND MALLET FOR THE PLACEMENT OF TILES.





#### **SHAPE TEMPLATE**

• Copies the shape of the areas which are awkward to mark onto tiles, for subsequent cutting. Maximum depth 1 3/4" (4.5 cm).



	REF.	=
SHAPE TEMPLATE	70925	10



#### **RUBBER MALLET - FLAT/SPHERICAL SIDES**

• Allows to strike at any angle. One flat surface and the other spherical.



	REF.	=	
WHITE RUBBER MALLET 17.6 OZ. (500 GR.)	66906	6	336





# **RUBBER GROUT FLOATS**







#### REPLACEABLE GROUT FLOAT PRO

- · Grout Float (Ref.26906) with sheet resistant to abrasion.
- Replaceable with spare (ref. 84925).

	REF.	=
SPARE GROUT FLOAT PRO	26906	15
REPLACEABLE GROUT FLOAT PRO	84925	6





#### **GROUT FLOATS PRO**

- · Black foam rubber.
- $\bullet$  Grout Float PRO 9"x4" 22.5x10cm. (Ref.84926), with white rubber sheet wear resistant.

	REF.	<u> </u>	
RUBBER GROUT FLOAT 9"X4"X19/32" (22,5X10X1,5CM)	84926	6	384





#### **SPONGE FLOAT PRO**

- · Polyurethane foam floats with high absorption.
- The PLUS model has slits for increased performance drag dirt.

	REF.	[	Ħ
SPONGE FLOAT PRO PLUS	84927	10	240

# **WORK TABLES**





#### **FOLDING 4-IN-1 WORKING TABLE**

- 4 uses in 1: Work bench, scaffold, dolly and creeper.
- · Foldable, easy to transport and storage.
- Double sided board: MDF wood side (work bench function) and non-slippery PP plastic side (rest of functions). EASY interchangeable.
- Reinforced stainless steel area for harder jobs. Avoids damages on wooden surface.
- Angle conveyor and rule printed on the wooden side. Also includes a hole for small drillings (max. 25 mm) and hand tools insterts on metal frame.
- · Folded table: 80x52x12.5cm.
- · Unfolded table: 115x52x80cm.



	REF.	=	
FOLDING 4-IN-1 WORKING TABLE	66924	1	16



# **OCTO-PLUS ENERGY CAS**

#### BATTERY-POWERED SUCTION CUP FOR THE HANDLING OF CERAMIC TILES.

Adapts to the surface finish without leaving a mark on the tile.





CAS CORDLESS ALLIANCE STITTEM **CAS BATERY** 

Category

**PREMIUM** 

Use

INTENSIVE













- · Powered by CAS Li-Ion 12V 2Ah battery, compatible with Metabo brand battery tools and with all those that are part of the CAS 12V platform.
- · LED battery charge level indicator.
- · Maximum load capacity: 331 lb (150kg).\*
- Pressure release mechanism.
- · Load loss indicator (LED).
- In the event of a loss of pressure, the vacuum pump is automatically reactivated until the working pressure is reached again.
- \*only on smooth surfaces and horizontal loading.

	REF.	5	Q	Ċ	*	=
OCTO-PLUS ENERGY CAS USA	66976	12V 2Ah	8"	2 Lb	3.3 Lb	1
BATTERY CAS LIPOWER 12V 2AH	85903					1









··· PROFESSIONAL

SECURITY

**USB BATTERY** 

#### **OCTO-USB ENERGY**

- · Battery suction cup designed for handling ceramic tiles.
- $\cdot$  3.7V battery integrated in the suction cup and charging via USB-C cable.
  - In case of loss of pressure, the vacuum pump is automatically reactivated until it reaches working pressure again.
  - Maximum load capacity: 309 lb\* (140 kg).
- Includes transport case.

	REF.	5	$\bigcirc$		*	=
OCTO-USB ENERGY	66967	3.7 V 1.2 Ah	8"	2 Lb	3.3 Lb	2

<sup>\*</sup> Only on smooth surfaces and horizontal handling





VACUUM

SECURITY

#### **SC-200 SUCTION CUP WITH VACUUM PUMP**

- · Suction cup for handling large and heavy tiles.
- · Adapts to any surface finish.
- · Suction applied by manual vacuum pump.
- · Load loss indicator (red mark).
- · Pressure-release mechanism.
- · Maximum load capacity: 243 lb (110 kg).

	REF.	=
SC-200 SUCTION CUP WITH VACUUM PUMP	18919	1





VACUUM

SECURITY

**NO MARKS** 

#### **GSC-200 GREY VACUUM SUCTION**

- $\cdot$  Suction cup for the manipulation of large ceramic tiles and heavy porcelain slabs.
- · Adapts to any surface without leaving any marks.
- · Fixing by vacuum manual pump.
- · Load loss indicator (red mark).
- · Pressure release mechanism.
- · Maximum load capacity: 243 lb (110 kg).
- · High resistance plastic body.

	REF.	*	
GSC-200 GREY VACUUM SUCTION	21951	3.3 Lb	1



































# ACCESSORIES FOR FIXING TILES AND FINISHINGS

Measuring systems
Tile spacers
Levelling systems





## **CONSTRUCTION LEVELS**

#### · WIDE RANGE OF LEVELS.


In Company of the Control of the Con





#### RUBILEVEL ANTISHOCK

- Levels manufacturated in reliable, resistant aluminum.
- Double machining to ensure a constant precision in the top face and the base.
- · Accuracy: 1/50" (0,5 mm/m).
- Three bubbles for checking horizontal, vertical and and 45° levels.
- Double and ergonomic bi-material handle.
- · Rubber protector at the ends.
- DUAL view vertical vial for front measurements. Eliminates parallax error.
- MAGNIFIED horizontal vial for the CLEAREST view of the bubble.




# TILE SPACERS & WEDGES

• TILE SPACERS, "T" SPACERS AND WEDGES FOR THE CORRECT PLACEMENT OF TILES. QUALITY BASE MATERIAL.









- For wall & floor tiles with minimum joint.
- ${\boldsymbol{\cdot}}$  Quality base material, without impurities or imperfections.

	REF.	=	
TILE SPACERS 1/32" (1 MM.) - (B-300 U.)	26998	10	1200

#### **SUPERPRO**



#### **TILE SPACER 1/16" (1.5MM)**

- For wall & floor tiles with minimum joint.
- · Quality base material, without impurities or imperfections.

	REF.	=	
TILE SPACERS 1/16" (1.5 MM.) - (B-300 U.)	26991	10	960
TILE SPACERS 1/16" (1.5 MM.) - (1000 PC.) JAR	02280	1	

XX







#### TILE SPACER 3/32" (2MM)

- For wall & floor tiles with minimum joint.
- · Quality base material, without impurities or imperfections.

	REF.	<u>-</u>	
TILE SPACERS 3/32" (2 MM.) - (B-300 U.)	26997	10	1680

#### SUPERPRO





#### TILE SPACERS 1/8" (3MM)

- For floor tiles with thin joint.
- · Quality base material, without impurities or imperfections.

	REF.	=	
TILE SPACERS 1/8" (3 MM.) - (B-200 U.)	26990	10	1200
TILE SPACERS 1/8" (3 MM.) - (1000 PC.) JAR	02281	1	

#### **SUPERPRO**





#### TILE SPACERS 3/16" (5MM)

- · For floor tiles.
- · Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.	=	
TILE SPACERS 3/16" (5 MM.) - (B-100 U.)	26989	10	960
TILE SPACERS 3/16" (5 MM.) - (400 PC. JAR)	02282	1	

#### SUPERPRO







#### TILE SPACER 1/4" (6MM)

- For floor tiles.
- · Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.	=	
TILE SPACERS 1/4" (6M M) - (B-100 UN)	26996	10	540

#### **SUPERPRO**







#### T-SPACERS 1/16" (1.5MM)

- · Ideal for "brick style" tiling and perimeters.
- · Quality base material, without impurities or imperfections.

	REF.	=
T-SPACERS 1/16" (1.5MM) (B-300 UN.)	26988	10
T FOR GROUTS 1/16" (1.5MM) (JAR-1000 UN.) USA	02715	1


 $\pi$ 











- · Ideal for "brick style" tiling and perimeters.
- · Quality base material, without impurities or imperfections.

	REF.	- -	
T-SPACERS 1/8" (3 MM.) - (B-200 U.)	26986	10	1680
T-SPACERS 1/8" (3 MM.) - (JAR-1000 U.)	02399	1	





#### T-SPACERS 3/16" (5MM)

- · Ideal for "brick style" tiling and perimeters.
- Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.	=	
T-SPACERS 3/16" (5 MM.) -(B-100 U.)	26987	10	2040
"T" SPACERS 3/16" - (JAR-400 U.)	02398	1	

#### **SUPERPRO**



#### HORSESHOE SPACERS

- For Rectify the position of the pieces during installation.
- Thanks to their geometry, horseshoe shaped, these spacers can be combined together to give the same function as a traditional crosshead or "T".

	REF.	=
SPACER HORSESHOE 1/16" (300 UN) JAR	13841	10
SPACER HORSESHOE 1/8" (250 UN) JAR	13840	1

#### **SUPERPRO**



#### **WEDGES**

- Wedges for tiling.
- · Quality base material, without impurities or imperfections.

	REF.	<u>-</u>	
WEDGES 3/16" (5MM.)-(JAR-500 PCS.)	02283	1	































## **DELTA LEVEL SYSTEM: LEVELLING SYSTEM**

#### SYSTEM TO FACILITATE THE LAYING AVOID LIPPAGE AND IMPROVING FINISHING.







#### **DELTA LEVEL SYSTEM STRIP**

- · Made in PP.
- · Different models available:

	REF.	=	
100 CLIPS 1/16" DELTA LEV. SYS (7/16"-7/8")	02846	20	320
100 CLIPS 3/16" DELTA LEV. SYS (1/2"-7/8")	06981	20	240





#### **DELTA LEVEL SYSTEM PLIERS FAST-FIX**

- ${\boldsymbol \cdot}$  FAST-FIX regulation system. Without screws, faster and intuitive.
- $\boldsymbol{\cdot}$  Made of steel with bi-material soft-grip handles for greater ergonomics.
- Protective cover on the pressure cam to avoid damaging the tile.

	REF.	=
DELTA LEVEL SYSTEM PLIERS FAST-FIX	03901	6





#### **DELTA LEVEL SYSTEM WEDGE**

- · Made in Polypropylene.
- Reusable.

	REF.	= "	
DELTA LEVEL SYSTEM WEDGE N (B-200 UN)	02844	13	104
DELTA LEVEL SYSTEM WEDGE N (B-400 UN)	02845	6	48
DELTA LEVEL SYSTEM WEDGE N (C-1200 UN)	02857	1	16

A

П

#### **SUPERPRO**



#### LEVELLING CERAMIC PROTECTOR

- To protect the tiles against scratching or abrasive damage caused by friction between wedges, caps and delicate tiles, particularly in the presence of sand or hard particles.
- For Delta System wedges or Cyclone system threads.• Reusable.

	REF.	×′∃	
LEVELLING CERAMIC PROTECTOR (B-400 UN)	16902	100	10.8 Lb

XX



# **CYCLONE LEVEL SYSTEM: LEVELLING SYSTEM**

#### SYSTEM TO FACILITATE THE LAYING AVOID LIPPAGE AND IMPROVING FINISHING.







#### **CYCLONE KIT**

- The kit consists of 300 clips and 100 reusable caps.
- Packaged in a practical bucket.

	REF.		
KIT CYCLONE 3 MM	35965	1	40
KIT CYCLONE 5 MM	35903	1	40

#### **SUPERPRO**





#### **CYCLONE CAPS**

- Reusable, special 1/4" (6 mm) external thread.
- Eccentric detail for better force concentration.
- Crowned area for better grip. Dimensions: 2 " 5/16 x 2 " 5/16 x 1 " 1/2 (5 9x59x38 mm).
- · Supplied in reusable container.

	REF.	=	
CYCLONE CAPS (B-100)	35949	5	50
CYCLONE CAPS (B-300)	35950	4	24
CYCLONE CAPS (B-1200)	35951	1	12

#### **SUPERPRO**



#### **CYCLONE FLAT BASE**

- · Available in various models:
- Flat base clips of 3mm (1/8") and 5mm (3/16").
- · Visual thickness identification by colour.

	REF.	=	
CYCLONE L.S. 1/8" 3 MM FLAT BASE (B-100)	35946	36	12
CYCLONE L.S. 1/8" 3 MM FLAT BASE (B-300)	35947	12	12
CYCLONE L.S. 1/8" 3 MM FLAT BASE (C-2400)	35948	1	20
CYCLONE L.S. 3/16" 5 MM FLAT BASE (B-100)	35900	36	12
CYCLONE L.S. 3/16" 5 MM FLAT BASE (B-300)	35901	12	12
CYCLONE L.S. 3/16" 5 MM FLAT BASE (C-100)	35902	1	20

XX



# **BUCKETS AND TUBS**

Plastic products for construction





# **PLASTIC TUBS "FLEXTUB"**









#### PLASTIC TUB №. 3 "FLEXTUB" (10.5 GAL.)

- Greater comfort during transport. For easy waste collection.
- · Reinforced handles. Greater resistance.
- · Lightweight.











REF.	<u></u>				
8773	13"	17 5/16"	10.5 gal	291h	

PLASTIC TUB №. 3 "FLEXTUB" (10.5 GAL.) 88773 13" 17 5/16" 10.5 gal. 2.9 Lb 10 300





#### PLASTIC TUB №. 4 "FLEXTUB" (14.5 GAL.)

- Greater comfort during transport. For easy waste collection.
- · Lightweight.





PLASTIC TUB BLACK COLOR №. 4 (55 L.)





REF.

88774



20 7/8"



14.5 gal.





(0

# **PLASTIC BUCKETS "LIGHTBUCK"**









#### PLASTIC BUCKET MODEL 2 "LIGHTBUCK" (5.8 GAL.)

- Greater comfort during transport. Easy waste collection.
- Heavy duty metal handle.
- Plastic handle. Comfort.









	REF.	<b>É</b>			$^{\circ}$	=		
PLASTIC BUCKET MODEL 2 WITH PLASTIC HANDLE [5.8 GAL.]	88772	14 9/16"	10 5/8"	5.8 gal.	2 Lb	10	450	



# SAFETY EQUIPMENT

Personal equipment for construction professionals





### **KNEE PADS AND ERGONOMIC SEAT**









#### **GEL COMFORT KNEE PADS**

- · Ergonomic design professional and high comfort knee pads.
- Its design combines the use of hard materials against impacts and uneven floors and soft materials therein, adapted to the user's anatomy.
- In addition to protecting the user's knees through the use of silicone gel inside, its studied ergonomics provide them with great stability, preventing ligaments and tendons fatigue.
- They incorporate two bands Neoprene closure.
- · Conforms to EN14404. Protection level: 1.

	REF.	=	
GEL COMFORT KNEE PADS	81998	6	96





#### **GEL DUPLEX KNEE PADS**

- Professional knee pads with ergonomic design. Highly comfortable.
- Their design combines the use of hard materials to protect against impacts and uneven floors and soft materials adaptable to the user's anatomy on the inside.
- Besides protecting the user's knees thanks to the silicone gel in their inside, their studied ergonomics gives them great stability, preventing ligaments and tendons fatigue.
- Wide range of uses thanks to their design " two in one ":
- Can be used together with the external rubber protection of great stability and resistance.
- With the main body only, less bulky, which allows the knee to slide without problem over smooth surfaces.
- They incorporate a double fastener, inferior and superior, easy adjustable.
- Conforms to EN14404.
- · Protection level: 1.

	REF.	=	
GEL DUPLEX KNEE PADS	81989	6	96



SUPERPRO	△ HIGH LOAD CAPACITY	HARD SURFACES

#### **SR-1 ERGONOMIC SEAT**

- Aluminum chassis high strength and stability.
- · Allows an ergonomic position of comfort.
- · Prevents injuries in knees and back.
- · Adjustable seat height and angle for optimum adaptation to each use.
- Robust construction with 7 heavy duty wheels.
- · Includes tray for tools and accessories.
- Ideal for flooring, parquet installation, cleaning and other operations on pavements tasks. Replaceable ergonomic kneepads.
- · Maximum weight: 286 lb (130 kg).

	REF.	=	
SR-1 ERGONOMIC SEAT	81999	1	18





# CLEANUP AND MAINTENANCE

Products and accessories for cleaning and installing ceramic tile





## **SPONGES, FLOATS AND PADS**

 COMPLETE RANGE OF SPONGES AND GROUT FLOATS FOR CLEANING AND PROTECTION OF TILES.





#### **HIDRO ROUNDED SPONGES**

- Convenient box with 2 bags x 30 Hidro Rounded Sponge vacuum packaged. Not individually packed.
- · Polyurethane sponges.
- · HIDRO models are highly absorbent.
- Extra large all purpose sponge.

	REF.	
HIDRO ROUNDED SPONGE	68995	
HIDRO ROUNDED SPONGE VACUUM PACKAGED (60UN)	68999	60



#### HIDRO ROUNDED SPONGES

- Mixed Rounded Sponge vacuum packaged 30 units, not individually packed.
- · Polyurethane sponges.
- · Mixed models: heavy duty grouting and haze buffer sponges.

	REF.	<u> </u>
MIXED ROUNDED SPONGE	68996	
MIXED ROUNDED SPONGE VACUUM PACKAGED (60UN)	68997	60

## **WASHBOYS**





#### **RUBICLEAN TRIPLE SUPERPRO**

- Plastic washboy, lightweight and high resistance.
- Equipped with 3 spiral rollers for further draining.
- Includes wheels and carrying handle.
- Capacity: 5.3 gl. (24 l.)
- Useful capacity: 2.2 gl. (10 l.)
- Dimensions: 20 7/8" x 11 1/32" x 14 9/16" (53 x 28 x 37 cm).
- · Supplied assembled and in 1 unit box.

	REF.	=	
RUBICLEAN TRIPLE SUPERPRO WASHBOY	21995	1	18






#### **RUBICLEAN TRIPLE SUPERPRO**

- · Composed by:
- Rubiclean Eco (Ref. 24948), Sponge standard (Ref. 24966), Rubber Trowel for Joints (Ref. 24969) and High absorption sponge plus with handle (Ref. 84927).
- Capacity: 5.2 gl. (20 l.)

	REF.	
RUBICLEAN ECO KIT	68910	1




# RUBI CLUE

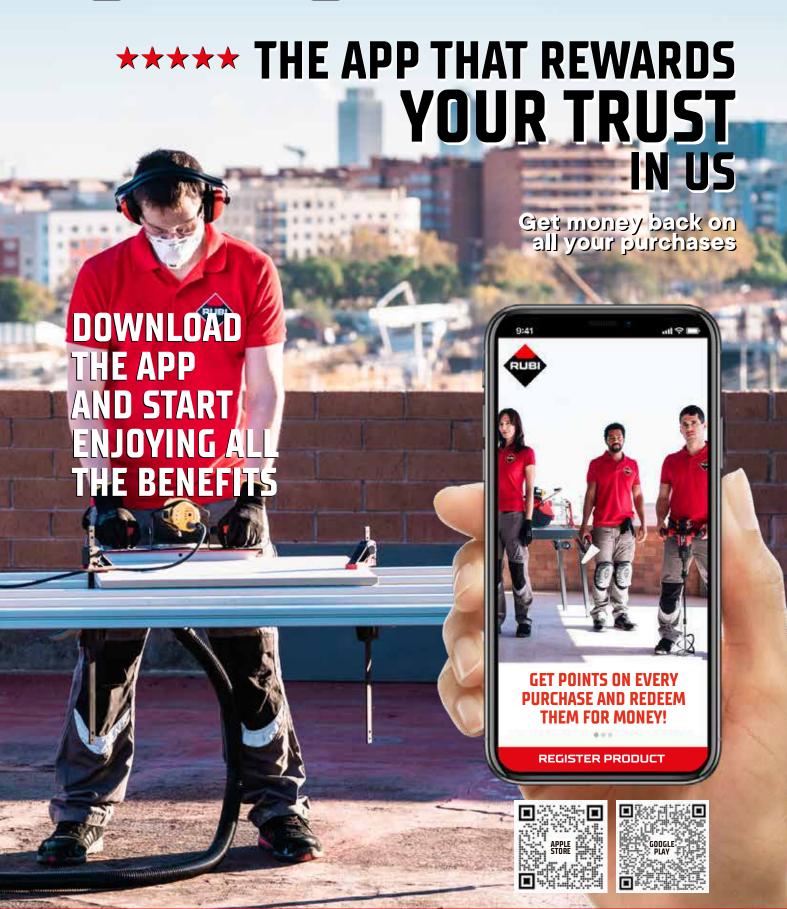



## SYMBOLOGY AND CERTIFICATIONS

In this catalogue to provide reader's with the maximum amount of information and to be as clearly as possible, we have used the following symbols:

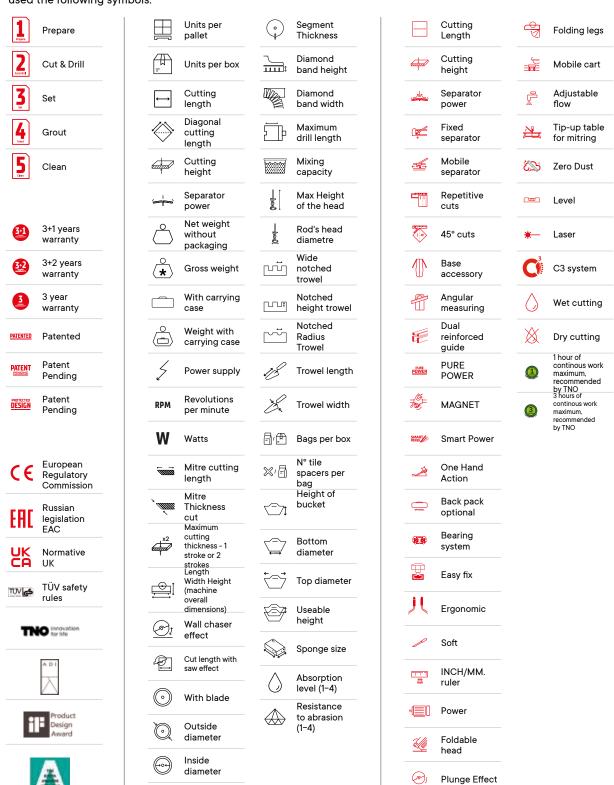

Rubi Group comply with the Directive 2002/96/EC on waste electrical and/or electronic and Directive 2002/95/EC on the restriction of certain substances in their manufacture, applying the law of each member state according to EEC your specific criteria. [WEEE, WEEE, ECDRAEE, etc...] [ROH5].

Images are for illustration purposes and may change without notice.

high

<sup>\*</sup>The gross weight of some electrical machines may vary depending on the type of pallet and carton type used in packaging.

<sup>\*\*</sup>Any manipulation or modification of machine voids the warranty. Our warranty covers defects in manufacturing or assembly in accordance with the applicable law.



# RUBICLUB

# **JOIN THE COMMUNITY OF 70.000+ EXPERTS IN THE ART OF TILING**

- 1. SIGN UP IN LESS THAN 1 MINUTE
- 2. EXTEND THE WARRANTY OF YOUR PURCHASES EASILY
- 3. GAIN ACCESS TO EXCLUSIVE BENEFITS AND GIFTS

### **SCAN THE QR CODE OR ENTER WWW.RUBI.COM**





Club Rubi Email clubrubi@rubi.com



### RUBI GROUP

#### **RUBI TOOLS USA Inc.**

10702 NW 147th Street, Suite 100 P. 1305 715 9892 F. 1305 715 9898















