


This is just a short order form. For RUBI's full line of products, please visit our website.

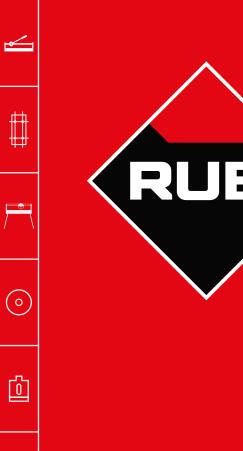

××

00.	About RUBI Group
04	Introduction
01.	Electric tile cutting
18	Electric cutters and mitre saws
28	Accesories for Electric cutters
02.	Diamond blades
30	Dry and wet cutting diamond blades
03.	Grinding ← polishing
35	Grinding wheels and blades
37	Polishing pads
04.	Manual tile cutting
40	Manual Tile Cutters
54	Scoring wheels and accessories for manual cutters
05.	Slab System
57	Cutting large tile

62

70

06.

77

81


Handling large tile

Installing large tile

Mixing

Electric Mixers

Mixing Paddles

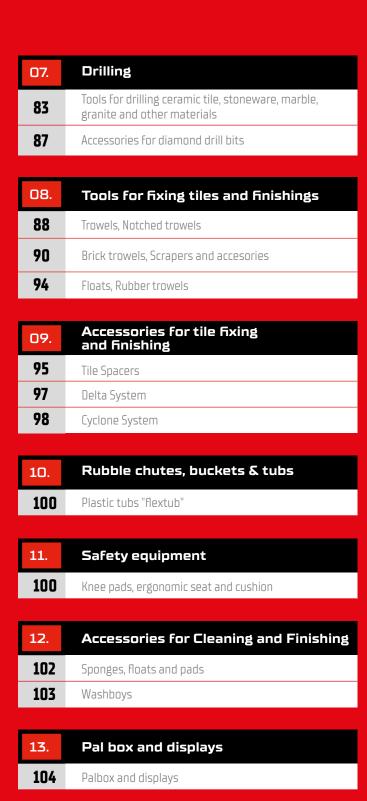




























THE BEST OPTION FOR EACH JOB SINCE 1951

At RUBI Group, we are experts in the design, manufacture and distribution of revolutionary machinery and tools for cutting, laying and maintaining tiles. Our relentless dedication to excellence has positioned us as the undisputed leaders in the industry. Every product we create is the result of our passion for innovation and our unwavering commitment to quality.


With the invention of the first hydraulic mosaic tile cutter in history, invented and patented by the Boada brothers in 1951, RUBI has always worked with a clear mission: to provide differentiated solutions to construction professionals by providing maximum efficiency, profitability and safety for the optimal installation of ceramic tiles.

In this way, by placing the installer at the centre of our strategy, we ensure that **innovation**, **the high quality of our products and excellence are fundamental principles throughout our product range**. The RUBI brand is currently recognised by the most demanding construction and design professionals in more than 120 countries, thanks to our robust international network of subsidiaries and branches.

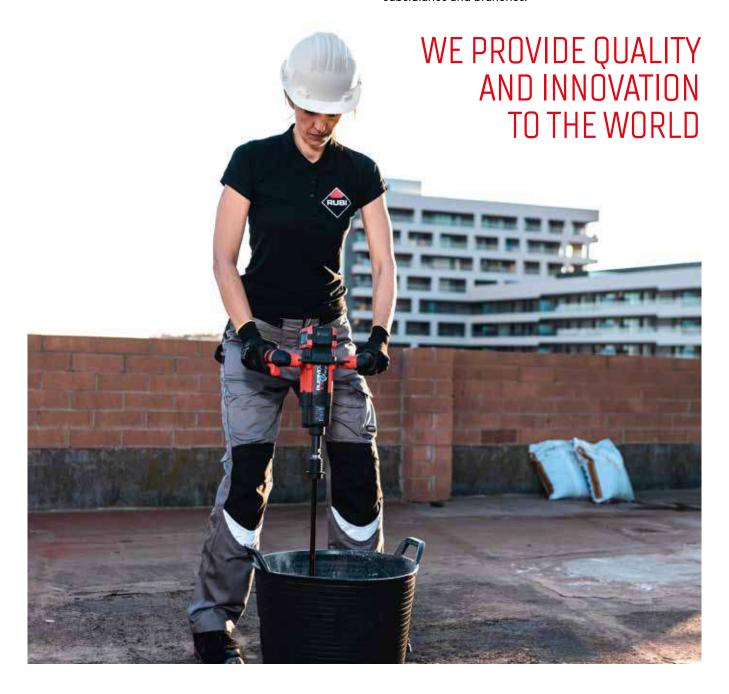



RUBI IS RUBI ALL OVER THE WORLD

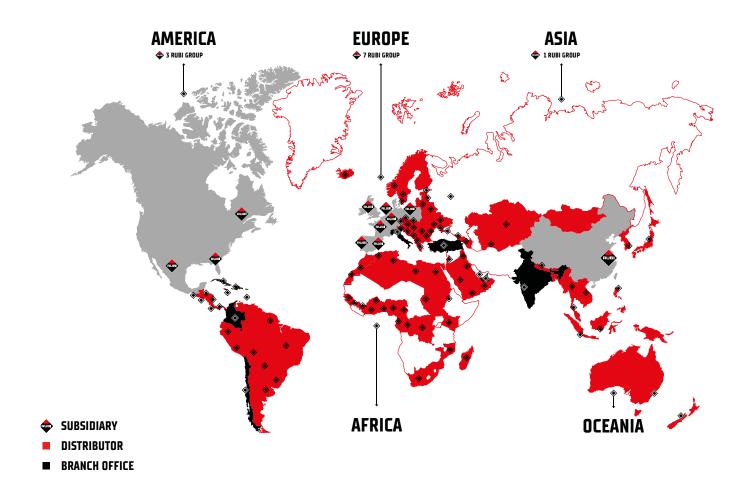

- +600 People in the RUBI Team
- 2 Production and logistics centres
- 11 International subsidiaries

- 120 Countries with RUBI brand distribution
- +100 Official Distributors

At RUBI Group, our multidisciplinary team is highly qualified and undergoes continual training. We are firmly committed to excellence, respect and passion, core values that guide our actions every day.

Our team is made up of more than 600 professionals in 11 subsidiaries and 9 branches around the world. Our experience and know-how support us in providing quality solutions at an international level.



BETTER PROFESSIONALS. BETTER PLACES.

THE RUBI 'BETTER PROFESSIONALS, BETTER PLACES' COMMITMENT.

At RUBI Group we are guided by our corporate purpose "Better Professionals. Better Places" that reflects our focus on two fundamental aspects, improving the quality and performance of our industry through the professionals whose talent is recognised by all, as well as the places they transform with their creativity.

We strive to change the future by being leaders in training exceptional professionals and contributing to building exceptional places, for the benefit of a better world.



Training for construction students at the BTP CFA apprenticeship centre in Antibes, France.

SDG FOR A SUSTAINABLE AND EQUITABLE FUTURE

Our commitment focuses on sustainable development as part of our Corporate Social Responsibility strategy, which encompasses the three key areas of sustainability: social, environmental and economic.

In doing so, we draw on 8 of the 17 Sustainable Development Goals (SDGs) set by the United Nations for the period 2015–2030, which guide us on our path towards a future with a focus on sustainability.

We firmly believe that environmental policies and social and economic sustainability are the responsibility of the



Collaboration with the Vicente Ferrer Foundation in the construction of housing for vulnerable people in Anantapur, India.



entire RUBI team. Only in a fairer, more equal and more sustainable world can we continue growing and working together with society and our environment.

TOGETHER WE ARE BUILDING A SUSTAINABLE AND EQUITABLE FUTURE FOR ALL.





Beach clean-up in Florida by RUBI Tools USA team.









RUBI

LET'S BUILD BETTER PLACES TOGETHER!

The RUBI Academy is a pioneering project designed to professionalise and promote the tiler's trade, aimed at present and future ceramics professionals.

With more than 70 years' experience in training and supporting ceramic tile installers, we bring together all our training activities in an inclusive and accessible space: the RUBI Academy.

The RUBI Academy promotes learning opportunities through a wide range of international training events, webinars, downloadable tutorials and audio-visual content available on our website.

In addition to these training actions, the RUBI Academy supports initiatives such as the "RUBI Scholarship", which promotes specialisation in tile installation among young students and collaborates in training events aimed at women in the construction industry or unemployed people who are continuing their training.

The main base of the RUBI Academy is located in our facilities in Santa Oliva, where it has a physical space dedicated to training. It has a classroom for theory classes and another space with more than 6243 sqf for practical training.

In this way, the RUBI Academy is consolidated as an accessible and quality training space, which also serves as an in-person and virtual meeting point for professionals in the sector. We value and raise the profile of the tiler's trade, bringing it closer to people and acknowledging the important role of ceramic tile installers in the construction industry.



FOLLOW US ON OUR YOUTUBE CHANNEL TO SEE ALL THE TRAINING VIDEOS










SHOWROOMS IN SUBSIDIARIES

RUBI's 11 subsidiaries cover global demand and the training and after-sales service, together with our trusted distributors, so we are always close to the user and can offer them solutions adapted to the characteristics of each market. In addition, in several of them, including our headquarters, we have modern showrooms displaying our latest market launches. We offer, in this way, an updated and innovative experience to our customers and users, showing how RUBI products meet the needs of the tiler in line with the new trends in the ceramic industry.

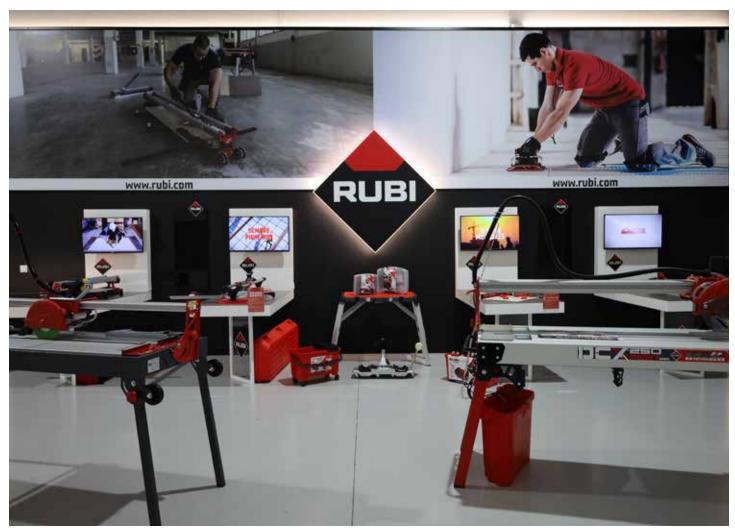

Showroom at RUBI Portugal's premises

CORPORATE MUSEUM

Since 1951, the RUBI team has been passionately devoted to professionalising the construction trades. As a reflection of our commitment, in 2003 we opened "The Tools of Construction" Corporate Museum at our main facilities in Santa Oliva, Tarragona. The museum is open to customers, professionals and students, providing them with a unique educational experience. They will be able to explore our historical collection of RUBI construction tools and test their skills in cutting and laying tiles.

HISTORY AND INNOVATION COME TOGETHER TO DRIVE GROWTH AND EXCELLENCE IN THE SECTOR.





AFTER-SALES SERVICE

RUBI's after-sales team, together with our extensive network of official technical services, work daily to deal as efficiently as possible with incidents and any questions and needs our customers and professionals may have regarding the cutting and laying of ceramic tiles.

At RUBI Group, we lead the market with high and fast response rates, thus achieving exceptional customer satisfaction worldwide. We guarantee superior performance in our tools, providing a long-lasting and satisfying purchasing experience with impeccable customer service.

There are a number of ways for you to contact us:







warrantyusa@rubi.com

+1 305 715 98 92



RUBI CLUB

RUBI CLUB members are always one step ahead of other tile laying professionals, thus gaining greater profitability and prestige for their business.

At RUBI, all products give you points that can be conveniently changed for money or gifts, and you get great discounts just for registering your purchases. You can also extend the useful life of your tools, with the free warranty extension of up to 5 years, and get the most out of your investments. Thanks to our new products and exclusive promotions for RUBI CLUB members, you can work with the best tools under the best conditions.

Currently, more than 70,000 experts in the art of tile laying around the world already trust CLUB RUBI to make them better professionals and deliver their projects in the most efficient way.

Join the top community of tile laying experts worldwide and benefit from all its advantages!



GET MONEY BACK ON YOUR PURCHASES



EXTEND THE WARRANTY FREE OF CHARGE



ACCESS EXCLUSIVE PROMOTIONS



RECEIVE INVITATIONS FOR EVENTS



ENJOY UNIQUE CONTENT



PARTICIPATE IN COMPETITIONS AND DRAWS







At RUBI, innovation and quality are fundamental pillars in everything we do: from the conception of the design, through the production phase, and finally reflected in our products. We are proud to offer solutions that enable the tiling professional to carry out their work with creativity and good attention to detail, obtaining optimum results of the highest quality.


TECHNOLOGICAL LEADERSHIP

119 Patented products

Protected products with industrial design





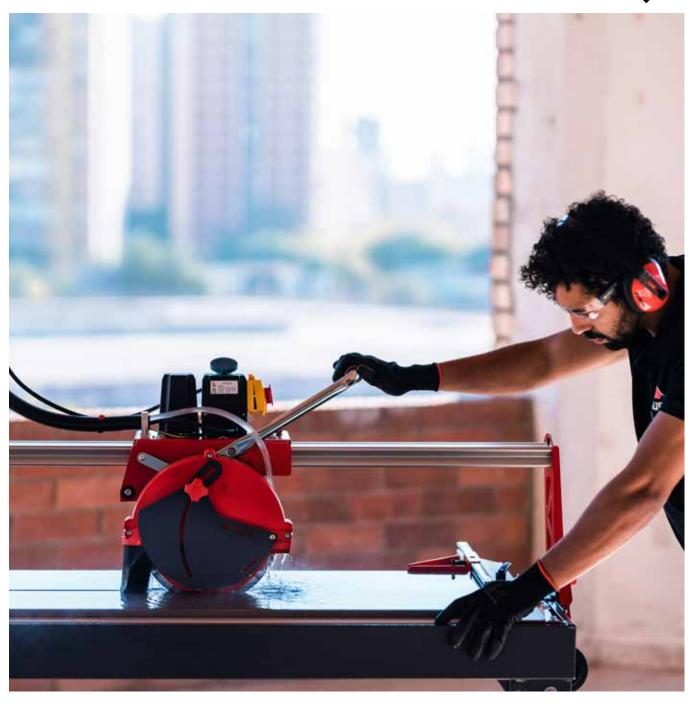

INNOVATION

We are constantly researching and developing new solutions based on the evolution of market and technology trends, our own experience and ongoing conversations with end users, our partners and other professionals.

QUALITY

We only use materials of the highest quality and we work in compliance with strict design and manufacturing standards in order to offer tools with the performance levels that our customers expect.

GUARANTEE

We strive to offer greater durability in our products and a peace of mind that comes from our long track record, also backed up by a customer support service and constant communication with the same global nature.

SOLUTIONS

Understanding and helping to shape our industry for generations has allowed us to create a wide range of tools that provide excellence and efficiency in the cutting and laying of tiles.



PARTNERSHIP WITH CAS

RUBI & CAS work to offer professionals battery-powered tools for ceramic tile installation with total freedom of movement. CAS batteries are compatible with more than 35 brands and over 300 products, making it a low-cost, high-performance solution for tilers. From RUBI, we have created and launched 4 innovative and revolutionary products with this leading technology.





18V CAS Li-Ion 18V battery compatible with Metabo 18V cordless tools and all of those that form part of the CAS platform.





12V CAS Li-lon 12V battery compatible with Metabo 12V cordless tools and all of those that form part of the CAS platform.



CAS BATTERIES

12/18V 2.0/4.0/5.2AH





Battery-powered tools for tile installers

COMPATIBLE WITH MORE THAN 35
BRANDS AND OVER 300 PRODUCTS





Save



1 battery pack for many brands



Save money



Save resources



Largest multi-manufacturer battery pack system



compatible

CAS BATTERY COMPATIBILITY

18 V 5.2 Ah	✓	✓	×	x
18 V 2.0 Ah	✓	✓	×	×
12 V 2.0 Ah	×	×	✓	1
12 V 4.0 Ah	×	×	✓	1

The charger is compatible with all batteries.



THE RUBI EXPERIENCE

5 STEPS TO EXCELLENCE

RUBI ensures quality, efficiency and creativity from start to finish at every stage of the tile installation process.

This basic signage across our entire product range helps the professional find the right tool for the task at hand, providing a clear and visual solution.

Our portfolio is now organised into these 5 categories, which have been defined taking into account our customers' testimonials about their own work processes, in the more than 120 countries where we operate.













1. Preparation

This phase includes all the processes prior to the installation of ceramic and porcelain tiles, starting with the preparation and making good of the substrates and the checking of levels, followed by the layout and design of the joint pattern and ending with the preparation and application of the tile adhesive.



2. Cutting and Drilling

Although after the preparation of the adhesive, this logically takes us to the installation stage, RUBI has included the cutting and drilling phase in second place. The reason is very simple, if we take into account that the tile needs to be cut (or drilled), it cannot be installed until this step has been carried out. All installations require tiles to be adapted and resized to the installation space and, whether it is to a greater or lesser extent, a ceramic tile will always have to be cut (or drilled).



3. Installation

In this stage, we mainly focus on bringing together all the necessary tools to ensure proper handling and installation of the tile, obtaining the best results both in flatness and alignment in order to make the setting-out design a reality with maximum precision.



4. Grouting

As its name indicates, this stage includes all the tools necessary for the filling and definition of the tile joint, as well as the removal of excess material and a first cleaning stage.



5. Cleaning

As it must do, the last stage brings together everything that is necessary to deliver the perfect job. The final cleaning of any ceramic tile installation process will always make the first impression on any user. For this reason, it is as important as any of the previous stages.





DC-250 PYTHON

MOVING HEAD MACHINE, VERSATILITY AND PRECISION

For cutting porcelain stoneware.































- · Motor assembly mounted on sliding bearings for maximum precision and reliability. Foldable at 45° for mitre. Direct drive motor.
- · Steel plate structure. Sturdy and maximum resistance to working conditions.
- · Patented ZERO DUST system exclusive to RUBI and certified by TNO, for safe exposure because of reduction of respirable dust particles generated during cutting.
- · C3 Pyhton cooling system. New adjustable refrigeration system. Allows to adjust the point of water's fall depending on the material's thickness, getting a direct impact of the water in the cutting point. This allows to increase the refrigeration's efficiency and to reduce water dispersion.
- · Foldable legs with wheels for an easier transportation and removable tables for easy cleaning of the machine.
- Adjustable aluminium square (0° 60°) with lateral stop for repetitive cuts at 0° and 45° .
- Safety protector for turbo and segmented blades.
- Blade cooling by water (50W water pump) with flow control.
- · Includes Red Cobra 10" Blade. Supplied with cable.

	REF.	5	RPM	\longleftrightarrow			x2	, dililin	\odot	\bigcirc		ightharpoons	*	<u>-</u>	
DC-250 PYTHON 850	56911	120V-60Hz	2790	33 11/16"	39"	27"	2 3/8 / 3 9/16"	2 3/16"	5/8"	10"	53 15/16x23 1/4x51 9/16"	120.2 Lb	153.2 Lb	1	**1
DC-250 PYTHON 1200	56914	120V-60Hz	2790	42 1/2"	48"	33"	2 3/8 / 3 9/16"	2 3/16"	5/8"	10"	63 3/4x32 5/16x51 9/16"	131.28 Lb	165 Lb	1	**1

The cutting capacities can vary depending on the head position, special flanges and disc diameter.



DCX-250 XPERT

PROFESSIONAL MOVING HEAD MACHINE FOR WET CUTTING WITH PLUNGE EFFECT.

For occasional cutting of natural stone such as marble or granite.



































- · Reinforced aluminium chassis with innovative triple beam system and steel sides. Improves the stability and rigidity of the chassis.
- · Reinforced cutting guide for a better cut finish.
- \cdot C3-PYTHON System increases cooling efficiency and reduces water dispersion.
- $\cdot \ \mbox{High performance plunge effect. Cutting height adjustment.}$
- · Includes transport handle and off-road type reinforced wheels, which provide better transportability and handling of the machine.
- Steel double settling system for improved efficiency and water recovery.
- Angular measurement with aluminium square adjustable from 0° to 60° for repetitive cuts.
- Includes reinforced folding legs with folding-prevention system and quick lock.
- External and easy to remove water tank with 8 gal (30 L) capacity.
- Includes improved splash guard system with auto-sliding protective cover.
- Patented ZERO DUST system exclusive to RUBI certified by the TNO, for safe exposure thanks to the reduction of the breathable dust particles generated during the cut.
- · Ergonomic bi-material handle for comfortable operation of the cutting head. Earth integrated into the chassis.
- Includes Cobra 10" Blade. Supplied with cable.

	REF.	5	RPM	\longleftrightarrow			x2	, dililin	<u></u>	\bigcirc	$^{\circ}$		=	
DCX-250 XPERT 1250	52962	230V-50Hz.230V-50Hz.	3350	49 3/16"	52 3/8"	35 7/16x35 7/16"	2 3/8 / 3 9/16"	1 15/16"	1"	10"	172 Lb	75 9/16x29 1/8x51 3/16"	1	**1
DCX-250 XPERT 1550	52972	230V-50Hz.	3350	61 1/16"	64 3/16"	43 5/16x43 5/16"	2 3/8 / 3 9/16"	1 15/16"	1"	10"	190 Lb	87 3/8x29 1/8x51 3/16"	1	**1



DS-250 N

MOBILE HEAD MACHINE FOR HIGH ACCURACY.

For wall tiles, floor tiles, porcelain tiles, marble, granite and other materials.































- · Motor assembly mounted on sliding bearings for maximum precision and reliability. Perfect finishes.
- · Folding legs with integrated castors: Pyramidal orientation to improve the stability and safety of the machine.
- · Wheels and handle included. Easy transport.
- · Aluminium structure. Lighter cutter with maximum resistance to working conditions.
- Removable aluminium tables for easy cleaning of the machine.
- · With thermic security switch.
- · Water pump cooling of blade with flow control valve.
- With a double set of flanges, one especially designed for mitre cuts.
- · Motor assembly mounted on sliding bearings for mitre cuts.
- · Safety protector for segmented blades.
- · With lateral stop for repetitive cuts.
- · Removable water tank system.
- 2mW line laser. Spirit level for easy field installation.
- Includes Cobra 10" Blade. Supplied with cable.
- · Supplied with ZERO DUST system already assembled. Also provided with a second anti-splash standard protector

	REF.	5	RPM	\longleftrightarrow					\bigcirc		Ô		=	
DS-250 N 1300	52934	230V-50 Hz.	3400	52"	37"	2"	1"	1"	10"	78x33 7/8x50"	212.7 Lb	265 Lb	1	**1
DS-250 N 1500	52944	230V-50 Hz.	3400	60"	42"	2"	1"	1"	10"	86 5/8x33 7/8x50"	220 Lb	276 Lb	1	**1



DX-350 N

MOBILE HEAD MACHINE WITH PLUNGE EFFECT FOR TOTAL VERSATILITY.

For all types of ceramic and porcelain tiles, building materials such as marble, granite, facade and fireproof bricks.

































- · Motor assembly mounted on sliding bearings for maximum precision and reliability. Perfect finishes.
- · Folding legs with integrated castors: Pyramidal orientation to improve the stability and safety of the machine.
- · Aluminium structure. Lighter cutter with maximum resistance to working conditions.
- · High performance plunge effect. Maximum cutting height.
- $\boldsymbol{\cdot}$ Equipped with protective safety system for segmented blades.
- · With thermal security switch.
- · Water pump cooling of blade with flow control valve.
- Diamond blade Ø 14" (350 mm) not included.
- · Allows the use of a Ø 12" (300 mm) blade.
- · Adjustable mobile head with plunge effect capability.
- · Motor on top and belt transmission.
- With lateral stop for repetitive cuts.
- · Aluminium working surface removable for easy cleaning.
- · Removable water tank system.
- 2mW line laser. Circular level for easy field installation.
- Includes Vip Turbo Mesh 12" Blade. Supplied with cable.
- Supplied with ZERO DUST system already assembled. Also provided with a second anti-splash standard protector

	REF.	5	RPM	\longleftrightarrow				x2		\bigcirc		\bigcirc	=	
DX-350 N 1300	52918	120V-60 Hz.	3400	52 3/16"	58 7/16"	41 5/16x41 5/16"	2 9/16"	4 1/8 / 8 11/16"	1"	12-14"	78x33 7/8x56 5/16"	220 Lb	1	**1



DU-200 EVO

MOBILE HEAD CUTTER FOR RENOVATIONS AND LIGHT WORKS.

To cut ceramic and porcelain wall and floor tiles.





























- \cdot Built-in foldable legs. Very easy to fix.
- · With wheels and handle for a more comfortable transport and handling.
- · External water tank, easy to handle and clean.
- · C³ System, improves blade's cleaning and cooling for a higher performance.
- Motor assembly mounted on sliding bearings and foldable for mitre cuts.
- With lateral stop for repetitive cuts and adjustable square from 0 to 45°.
- Direct drive motor with thermal protector and reinforced chassis.
- · Corrugated tube to protect power cable and water pipe.
- · Front blade cooling diffuser with 5 positions depending on the hardness or the abrasion of the material.
- Bi-material handle, better ergonomics.
- With; CEV-SUPERPRO diamond blade Ø 8" (200 mm) included. Supplied with cable.

	REF.	5	RPM	\longleftrightarrow			, dillin	\odot	\bigcirc			=	
DU-200 EVO 650	55907	120V-60Hz.	2915	25 9/16"	17 11/16×17 11/16"	13/8"	13/16"	V	8"	46 1/16x15 3/8x40 3/16"	49.6 Lb	1	9
DU-200 EVO 850	54976	120V-60Hz.	2915	33 7/16"	24x24"	13/8"	13/16"	1	8"	53 9/16x15 3/8x40 3/16"	60 Lb	1	6

The displayed product may not correspond exactly with the actual model.



DT-10IN MAX

TRANSPORTABLE ELECTRIC CUTTER WITH MITRE EFFECT. GOOD FINISH.

For cutting stoneware, tiles, ceramics, refractories and other materials.









3 9/16'













- · Python cooling system combined with the Zero Dust system, keeps your work area clean by reducing the production of splashes.
- · It incorporates a tubular steel support with wheels and foldable, to transport the machine easily.
- · With lateral stop for repetitive cuts with adjustment from 0° to 45° and magnetic support for for the blade key.
- · Diamond blade for fast, smooth cuts with a long service life.
- Laser indicator to facilitate ceramic placement and obtain more precise cuts.
- \cdot Tilting cutting head adjusts for precise 22.5° and 45° bevel cuts.
- Tank with level indication min. and max. Maximum capacity: 5 gal. (19 I).
- It incorporates an aluminum table with a rubber surface with a cutting capacity of 36" (90 cm).
- replaceable table available (Ref #58907) that increases the cutting capacity to 48".
- Includes Arrowhead 10" Blade. Supplied with cable.

	REF.	5	RPM	\longleftrightarrow			, dililin	(in)	\bigcirc		Ô	=	
DT-250 MAX	26994	120V-60 Hz	4000	36"	25"	3 9/16"	1"	1"	10"	63x368 1/8x48 7/16"	99 Lb	1	

The cutting capacities can vary depending on the head position, special flanges and disc diameter.



DT-7IN MAX

TRANSPORTABLE ELECTRIC CUTTER WITH MITRE EFFECT. GOOD FINISH.

Recommended for cutting ceramic, porcelain, stone and glass tile.























- · Incorporates tubular steel support and foldable, to transport the machine easily.
- · Universal motor with replaceable brushes.
- \cdot With lateral stop for repetitive cuts with adjustment from 0 ° to 45 °.
- · Premium Laser-cut Blade: For fast, smooth cuts with long life.
- \cdot Tilting cutting head adjusts for precise 22.5 ° and 45 ° bevel cuts.
- · Water tank with level indication min. and max.
- · Maximum capacity: 4.27 gal / 16.2 L
- Aluminum main table. Rear water tray extensions in reinforced plastic.
- $\boldsymbol{\cdot}$ Includes 7" Blade. Supplied with cable.

	REF.	5	RPM	\longleftrightarrow					O		$\stackrel{\circ}{\Box}$		
DT-250 MAX	26993	120V-60 Hz	6000	24"	18"	2 1/4"	1"	5/8"	7"	48x23.2x44 7/16"	56.12 Lb	1	

The cutting capacities can vary depending on the head position, special flanges and disc diameter.



ND 7IN MAX

PORTABLE ELECTRIC CUTTER.

Ideal for renovations and small tile jobs for cutting ceramic, porcelain, stone, and glass tile.





























- \cdot Machined aluminum table with tilting right table for 22.5 ° and 45 ° miter cuts.
- · Self-aligning extruded aluminum fence with single action lever for fast setup of accurate and repetitive cuts.
- · Soft-Slip aluminum angle guide glides smoothly along the aluminum fence for 0° to 45° diagonal cuts.
- · Transparent splash guard provides a clear view of the blade and the line of cut for precision alignment.
- Perfect for repairs and renovations. Ideal for indoor work.
- · Anti-splash system that keeps dry the work area by reducing splash production.
- Detachable rear table support allows straight cuts up to 24" in length.
- · On-board tool storage for convenient blade changes.
- Integrated carry handle for easy portability to work sites.
- Direct drive 1.0 HP induction motor with thermal protection.
- · Large water tank provides continuous water to cut to reduce dust and cool blade.
- Tubular steel chassis with reinforced leg supports.
- Premium laser-cut 7in. diamond blade included for fast and smooth cuts.

	REF.	5	RPM	\longleftrightarrow				(in)	\bigcirc		$^{\circ}$			
ND 7IN MAX	45986	120V-60 Hz	3450	24"	13"	1 1/4"	7/8"	5/8"	7"	23x19.5x10.5"	27 Lb	1	20	

The breaking capacities may vary depending on the position of the head, special flanges and disc diameter.





ND 7IN READY

PORTABLE ELECTRIC CUTTER.

Ideal for renovations and small tile jobs for cutting ceramic, porcelain, stone, and glass tile.





























- \cdot Stainless steel table with tilting right table for 22.5 ° and 45 ° miter cuts.
- · Extruded aluminum fence with single action lever for fast setup of accurate and repetitive cuts.
- · Soft-Slip angle guide glides smoothly along the aluminum fence for 0° to 45° diagonal cuts.
- · Transparent splash guard provides a clear view of the blade and the cut line for precision alignment.
- Direct drive induction motor with thermal protection.
- Premium laser-cut 7in. diamond blade included for fast and smooth cuts.
- · Non-slip feet for greater stability.
- Tubular steel chassis.
- · Large water tank provides continuous water to cut to reduce dust and cool blade.

	REF.	5	RPM	\longleftrightarrow			, dililin		Q				
ND 7IN READY	45985	120V-60 Hz	3450	20"	13"	1 1/4"	7/8"	5/8"	7"	22.5x19x10 2/4"	21 Lb	1	20

The breaking capacities may vary depending on the position of the head, special flanges and disc diameter.



	Name	Reference	Rip Cut	Diagonal	Blade	Arbor	Plunge cut	НР
	DU-200 EVO 650	54976	33''	24''	8"	1" & 5/8"	Ν	1,1 HP
	DU-200 EVO 850	54907	26''	18''	8''	1'' & 5/8''	Ν	1,1 HP
	DC-250 850 PHYTON	56911	38''	27''	10''	5/8''	Y	1,5 HP
	DC-250 1200 PHYTON	56914	48"	33''	10''	5/8''	Y	1,5 HP
	DCX-250 XPERT 1250	52962	49''	35''	10''	5/8''	Y	2 HP
	DCX-250 XPERT 1550	52972	61''	43''	10''	5/8''	Y	2 HP
	DS-250 N 1300	52934	52''	37''	10''	1''	Ν	3 HP
HH	DS-250 N 1500	52944	60''	42''	10''	1''	Ν	3 HP
H	DX-350 N 1300	52918	58''	41"	12-14''	1''	Y	3 HP
	DT-10IN MAX	26994	36''	25''	10''	5/8''	Y	15 Amps
	DT-7IN MAX	26993	24"	18"	7"	5/8''	Y	10 Amps
	ND 7" READY	45985	20"	13"	7''	5/8''	N/A	3 / 4 HP
	ND 7" MAX	45986	24"	13"	7''	5/8''	N/A	1 HP





























ACCESSORIES FOR ELECTRIC CUTTERS



 Δ

A





LASER & LEVEL KIT DV/DC/DCX/DS/DX

- · Kit includes:
- Circular bubble level to facilitate proper positioning of the electric cutter.
- Laser Tracer indicating the passage of the disc and facilitates placement of material
- · Laser power: 2 mW
- · Laser Class: 2
- · Not compatible with DC-250 PYTHON models.

	REF.	=
LASER & LEVEL KIT DV/DC/DCX/DS/DX	54999	1





LATERAL STOP FOR DC/DCX/DS/DX

• Facilitates positioning of the tile, while reducing the percentage of errors.

	REF.	=
LATERAL STOP FOR DC/DCX/DS/DX	54822	1

SUPERPRO



TILE FIXER DV/DC/DCX/DS/DX

- Allows the fixing of the tile during cutting, thus avoiding sudden movements.
- · Accessory adaptable to DV,DC,DS and DX series (up to 2009).

	REF.	_ W
TILE FIXER DV/DC/DCX/DS/DX	51916	1

SUPERPRO



TABLE EXTENSION

- Increases work surface for large format tiles. 23 5/8"(600x280mm).
- Maximum weight: 33Lb, (15kg).
- Compatible with various models of cutting machines.

	KEF.	<u>=^</u> _
TABLE EXTENSION DV/DC/DCX/DS/DX	54993	1





ROLLER TABLE EXTENSION

- · With rollers to simplify movement of the tiles.
- · With adjustable foldable legs.
- Work surface 26 9/16"x22 5/8" (675x575mm) and maximum weight 154lb (70kg).
- · Installation on both sides of the machine.

	REF.	=
ROLLER TABLE EXTENSION DU/DC/DCX/DS/DX (FROM 2013)	51914	1



EXTENDABLE TABLE DT-10IN MAX

- For better grip of large tiles with a cutting capacity of up to 48" (120 cm).
- · Exclusive for DT -250 MAX (Ref. 26994).
- Extendable legs included to prevent tipping of the support.
- Main table manufactured in aluminium with a rubber layer.
- Guides manufactured in extruded aluminium with reinforcing cross-bars.

	REF.	=
EXTENDABLE TABLE DT-10IN MAX	58907	1



ADJUSTABLE LENGTH LATERAL STOP DC/DCX/DS/DX

- For fixing large format tiles.
- Adjustable to the maximum length of electric cutter.
- $\boldsymbol{\cdot}$ Tile is held laterally thus avoiding any movement.
- Especially suitable for blocking and execution of repetitive miter.

	REF.	=
ADJUSTABLE LENGTH LATERAL STOP DC/DCX/ DS/DX	54844	1





SET OF FLANGES FOR MITRING CUTS.

- To reduce saw flex in miter cuts.
- · Available in several models.
- Flange for reinforced saws.

	REF.	-
SET OF FLANGES 0184MM DX-350	51915	
SET OF FLANGES 0130MM DV/DC/DCX/DX-250	57991	1
SET OF FLANGES FOR DT-10IN MAX	58906	



DIAMOND BLADES

· DRY & WET CUT.







BLADE BADGER MESH DRY

- For cutting all type of hard materials as granite, slate, natural stone, quartz conglomerate, rustic stoneware, clinker, refractory, and all kind of porcelain tiles.
- This blade is a robust blade for heavy duty jobs and during cutting to counter any type of overheating, this blade has two ways for cooling.
- 5/8" ring adapter included.

	REF.	<u></u>	<u> </u>	•	<u></u>	
BLADE BADGE MESH DRY 4" USA	34900	4"	%" & %"	1/16"	3/8"	1
BLADE BADGE MESH DRY 4 1/2" USA	34901	4 1/2"	%" & %"	1/16"	3/8"	1
BLADE BADGE MESH DRY 5" USA	34902	5"	%" & %"	1/16"	3/8"	1



quality 5.0 ★★★★
speed 4.5 ★★★★



EXTRA LONG LIFE

VIP TURBO MESH DRY

- Recommended blade for cutting hard materials such as granite, rustic tiles, dekton, clinker, refractory, slate and porcelain tile.
- The turbo mesh design of the diamond band offers greater cutting speed on hard materials without sacrificing finish quality.
- 5/8" ring adapter included.
- Thicker center to avoid vibrations and wobbling.

	REF.	O	<u></u>	•	•	=
VIP MINI TURBO MESH DRY 3 1/4" USA	31952	3 1/4"	5⁄8" & 7⁄8"	1/16"	3/8"	1
VIP TURBO MESH DRY 4" USA	31926	4"	%" & %"	1/16"	3/8"	1
VIP TURBO MESH DRY 4 1/2" USA	31927	4 1/2"	%" & %"	1/16"	3/8"	1
VIP TURBO MESH DRY 5" USA	31949	5"	%" & %"	1/16"	3/8"	1





 \odot



quality 5.0 ****

speed 4.5 ****

○ PREMIUM EXTRA LONG LIFE

VIP TURBO MESH WET

- Recommended blade for cutting hard materials such as granite, rustic tiles, dekton, clinker, refractory, slate and porcelain tile.
- The turbo mesh design of the diamond band offers greater cutting speed on hard materials without sacrificing finish quality.
- 5/8" ring adapter included.
- Thicker center to avoid vibrations and wobbling.

	REF.	Ö	<u></u>	()		
VIP TURBO MESH WET 7" USA	31929	7"	%" & %"	1/16"	3/8"	1
VIP TURBO MESH WET 8" USA	31940	8"	%" & 1"	1/16"	3/8"	1
VIP TURBO MESH WET 10" USA	31941	10"	%" & 1"	1/16"	3/8"	1
VIP TURBO MESH WET 12" USA	31946	12"	1"	1/16"	3/8"	1
VIP TURBO MESH WET 14" USA	31947	14"	1"	1/8"	3/8"	1



PREMIUM

RED COBRA DRY

- Recommended blade to cut Porcelain, Ceramic, Marble, Granite, Natural Stone.
- 5/8" ring adapter included.

	REF.	O	<u></u>	()		
RED COBRA DRY 4" USA	31950	4"	⁵ /8" & ⁷ /8"	1/16"	1/4"	1
RED COBRA DRY 4 1/2" USA	31951	4 ½"	5/8" & 7/8"	1/16"	1/4"	1



○ PREMIUM

RED COBRA WET

- Recommended blade to cut Porcelain, Ceramic, Glass, Marble, Granite, Natural Stone.
- 5/8" ring adapter included.
- Thicker center to avoid vibrations and wobbling.

	REF.	Ō	<u></u>	(*)		
RED COBRA WET 7" USA	31960	7"	5/8" & 7/8"	1/16"	5/16"	1
RED COBRA WET 8" USA	30998	8"	5/8" & 1"	1/16"	5/16"	1
RED COBRA WET 10" USA	31961	10"	5/8" & 1"	1/16"	3/8"	1
RED COBRA WET 12" USA	30999	12"	1"	1/8"	3/8"	1

ref.31960

speed 4.5









○ PREMIUM

BLADE THICKER WET

- For cutting all types of ceramic, porcelain and natural stone materials.
- For cutting thicknesses between 20mm (3/4") and 35mm (1-3/8").
- · Joint by laser welding.
- Extra-long life.
- Suitable for use on cutting tables and cut-off machines that incorporate guard systems in compliance with the standard for use of segmented blades.
- Special bonded alloy that provides a good finish with a very fast cutting speed.

	REF.	<u> O</u>	<u></u>	<u></u>	<u></u>	
THICKER WET 10" USA	32962	10"	%" & 1"	1/16"	3/8"	1
THICKER WET 12" USA	32963	12"	1"	1/8"	3/8"	1
THICKER WET 14" USA	32964	14"	1"	1/8"	3/8"	1







○ PREMIUM

ARROWHEAD TURBO

- · Recommended blade to cut fine porcelain tiles.
- Turbo blade. Turbo edge for faster cutting.
- · High Tech. High speed.
- · Use or wet or dry.

	REF.	Ö	<u></u>	()	<u></u>	
ARROWHEAD WET & DRY TURBO 4 1/2"	31916	4 1/2"	% & %"	1/16"	5/16"	1
ARROWHEAD WET & DRY TURBO 7"	30985	7"	% & %"	1/16"	1/16"	1
ARROWHEAD WET 10"	30994	10"	% & 1"	1/16"	1/16"	1



quality 4.0 ****
speed 4.0 ****

○ PREMIUM

ARROWHEAD J-SLOT

- Recommended blade to cut fine porcelain tiles.
- · High Tech. High speed.

	REF.	<u></u>	<u> </u>	<u></u>	<u></u>	
ARROWHEAD 7"	31901	7 "	5/8 "	1/16"	5/16"	1
ARROWHEAD 10"	31900	10"	5/8 "	1/16"	3/8"	1



 \odot



○ PREMIUM

GLASS WET

- Recommended blade to cut Glass mosaic, glass blocks and other glass materials.
- · High quality finish at low speed.

	REF.	<u></u>	Q	•		<u>-</u>
GLASS PREMIUM 7"	31994	7 "	% " & ⁷ /8"	1/16"	1/4"	1
GLASS PREMIUM 8"	31998	8"	% "& 1"	1/16"	5/16"	1
GLASS PREMIUM 10"	31999	10"	% " & 1"	1/16"	5/16"	1

quality 4.0

speed 4.0 **** ref.31994 / 31998

quality 5.0 ★★★★★

speed 3.0 ★★★★

ref.31999







PORCELAIN

- · Recommended blade to cut fine porcelain tiles.
- · High Tech. High speed on porcelain tiles.

	REF.	(in)	Ö	•		F
PORCELAIN WET & DRY 4 1/2"	31914	4 1/2"	⁵ /8" & ⁷ /8"	1/16"	5/16"	1
WET & DRY 4 1/2" SUPER PRO	31913	4 1/2"	5/8" & 7/8"	1/16"	3/8"	1
PORCELAIN 7"	31912	7"	5/8"	1/16"	5/16"	1
PORCELAIN 10"	31907	10"	5/8"	1/16"	5/16"	1





NATURAL STONE

- Recommended blade to cut fine natural stone.
- High Tech. High speed on natural stone.

	REF.		O	•		=
NATURAL STONE 7"	31918	7"	5/8"	1/16"	5/16"	1
NATURAL STONE 10"	31917	10"	5/8"	1/16"	3/8"	1









GLASS

 $\boldsymbol{\cdot}$ Recommended blade to cut glass.

	REF.	()	Q	(*)		
GLASS 7"	31920	7 "	5/8"	1/16"	5/16"	1
GLASS 10"	31919	10"	5/8"	1/16"	3/8"	1







GRINDING BLADES

- · VACUUM BRAZED embossed plate.
- For edges and surfaces grinding of natural stone, all kind of ceramic tiles and paint or resin coatings.
- For GRINDERS use.
- Maximum recommended speed: 15,300 RPM.
- · Fine grinding finish (Ref.31974).
- · Coarse grinding finish (Ref.31979).

	REF.	\bigcirc		\odot		RPM	=
VDF 100 FINE PRO	31974	4"	7/8"	1/16"	7/8"	15300 max	1
VDG 100 COARSE PRO	31979	4"	7/8"	1/8"	7/8"	15300 max	1

GRINDING & POLISHING









NO VIBRATIONS

GOOD FINISH

CUTTING & GRINDING BLADES

- For cutting and grinding soft natural stone and ceramic tiles and synthetic materials.
- $\boldsymbol{\cdot}$ For adjustment cuts and grinding on all types of porcelain and hard materials.
- For materials with <3/4" (20 mm) thickness.
- Electroplated continous rim blade.
- $\boldsymbol{\cdot}$ Two-sided and reversible blade for a better performance.
- For grinders use. Connection: 5/8" thread.

	REF.	O		•			RPM	=
ECD 4 1/2" 2IN1 SUPERPRO	31976	4 1/2"	5/8"	1/16"	1/4"	1"	13300 max	1
ECD 5" 2IN1 SUPERPRO	31977	5"	5/8"	1/16"	1/4"	1"	12250 max	1





SUPERPRO

STONE CUP WHEEL

• Perfect for buffing work on any type of natural stone, especially granite and marble, and cured concrete surfaces.

	REF.	Ò	(+o+)	
STONE CUP WHEEL	31921	1	4"	5/8"



SUPERPRO

CLEANING BLOCK

- · For cleaning of diamond blades.
- Made of corindon with a #100 grit.

	REF.	=
CLEANING BLOCK	05973	5



SUPERPRO

N-CLEANING BLOCK

- Specifically designed to bring back the diamonds on the rim of diamond blades when cutting porcelain.
- Made of silicon carbide with a #20 grit.

	REF.	-
N-CLEANING BLOCK	05974	5



SUPERPRO

PAD SUPPORT FOR POLISHING AND BUFFING

- \cdot Fixing brackets for flexible polishing and buffing blades Ø100 mm.
- · Compatible with jobs dry and water-cooled.
- · VELCRO fastening.
- · Connection polisher / grinder with M14 thread.

	REF.		=	
SUPPORT FLOPPY PAD 0100MM M14	62986	4"	1	









NATURAL STONE

QUALITY FINISH

DRY POLISHING DIAMOND PADS

- Resin polishing pads. 8 DRY polishing pads. Maximum operating speed: 3,000 rpm.
- Premium cooling technology on both versions (Dry & Wet).
- · Will remove scratches from all Natural Stones.

	REF.	Q	=
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN # 50	61911	4"	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #100	61913	4"	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #200	61915	4"	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #400	61931	4"	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #800	61932	4"	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #1500	61933	4"	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #3000	61940	4"	1
RESIN DRY POLISHING PAD FINAL BUFF 4" (WHITE)	61973	4"	1









SUPERPRO	NATURAL STONE	QUALITY FINISH

DRY POLISHING DIAMOND PADS

- Resin polishing pads. 8 WET polishing pads. Maximum operating speed: 4,500 rpm.
- Premium cooling technology on both versions (Dry & Wet).
- · Will remove scratches from all Natural Stones.

	REF.	\bigcirc	=
DIAMOND PADS WET POLISHING 0100 MM - GRAIN # 50	61942	4"	1
DIAMOND PADS WET POLISHING 0100 MM - GRAIN #100	61945	4"	1
DIAMOND PADS WET POLISHING 0100 MM - GRAIN #200	61957	4"	1
DIAMOND PADS WET POLISHING 0100 MM - GRAIN #400	61958	4"	1
DIAMOND PADS WET POLISHING 0100 MM - GRAIN #800	61959	4"	1
DIAMOND PADS WET POLISHING 0100 MM - GRAIN #1500	61961	4"	1
DIAMOND PADS WET POLISHING 0100 MM - GRAIN #3000	61964	4"	1
RESIN WET POLISHING PAD FINAL BUFF 4" (WHITE)	61971	4"	1



SUPERPRO	PORCELAIN TILE	QUALITY FINISH	LONG LIFE
----------	----------------	----------------	-----------

MANUAL POLISHING PADS

- Range of diamond rubber pads for roughing and edge polishing, cutting and surfaces of natural stone and ceramic tile.
- · Semi-flexible. Good adaptation to the user's hand. Wet use is recommended.
- Different grit sizes: # 60, # 120 and # 200 for roughing, # 400 for polishing.
- Dimensions of the diamond plate: 2 3/16 x 3 9/16 (55x90 mm).
- Rubber pad dimensions: 2 5/16 x 3 11/16 x 1 3/16 (58x94x30 mm).

	REF.	
DIAMOND POLISHING PAD GRAIN # 60	61974	10
DIAMOND POLISHING PAD GRAIN #120	61975	10
DIAMOND POLISHING PAD GRAIN #200	61976	10
DIAMOND POLISHING PAD GRAIN #400	61977	10




PRO-EDGER BEVELLING AND MITRING ACCESSORY

PROFESSIONAL PORTABLE SYSTEM FOR INTENSIVE USE, ESPECIALLY DESIGNED FOR DRY BEVELLING AND MITRING PRINCIPALLY OF LARGE FORMAT TILES.

It can bevel and mitre porcelain, ceramic and any natural stone material of any length.



















- · It makes mitre cuts at 45° up to a maximum thickness of 3/4" (20 mm), and with no thickness limitation for bevelling.
- · Progressive bevelling and mitring at different depths to prolong the useful life of the grinding wheel and make bevelling easier for the user.
- · Compatible with (4 1/2" & 5") 115 & 125mm angle grinders with cable or battery that are easily and safely fitted thanks to the joint made with an M14 threaded shaft and quick-fastening belt.
- · Sealed high-speed bearings, to prevent the ingress of dust generated during the bevelling or mitring.
- · Highly wear-resistant polyethylene slides.
- A vacuum cleaner can be easily fitted for dust extraction (ZERO-DUST).
- · Quick and simple grinding wheel change.
- · Chassis with carbon steel sheet.
- Highly friction-resistant white polyethylene slides
- · Plastic handle.
- · Sealed single-row deep-groove ball bearings.
- 45° x 3/4" grinding wheel included (ref. 16946).
- PVC plastic grinding wheel guard.
- Fixing to angle grinder by means of a 5/8"-11" (Ref. 16901) and quick fastening belt.
- Progressive wear bevelling and mitring is adjustable by 3/8".
- · A damp cloth is recommended for cleaning.
- · Water is not necessary for use.

	REF.					Ů	*	=	
PRO-EDGER PORTABLE BEVELING USA	16901	√	13/16"	5/8"	14 15/16x8 1/4x6 11/16"	9 Lb	9.9 Lb	1	24

ACCESSORIES



Fine Grit PRO-EDGER mitring Wheel



Turbo Twist Coarse Grit PRO-EDGER mitring Wheel



Fine Grit PRO-EDGER bevelling Wheel







GOOD FINISH

FINE GRIT PRO-EDGER BEVELLING WHEEL

- · Grinding wheel for bevelling.
- Diamond grits fixed by means of a vacuum brazing system.
- Recommended for use with ANGLE GRINDERS between 9000 12000 rpm.
- Round finish available on 3/16" and 3/8" (5 and 10 mm) radius.
- · Internal diameter: 16.1 mm (M16 thread).
- For exclusive use with PRO-EDGER.

	REF.	O	<u></u>	::	RPM	
FINE GRIT R.5 PRO-EDGER BEVELLING WHEEL	16957	2 5/8"	0"	1/4"	12000 max.	1
FINE GRIT R.10 PRO-EDGER BEVELLING WHEEL	16958	3"	0"	7/16"	12000 max.	1







FINE GRIT PRO-EDGER MITRING WHEEL

- · Grinding wheel for mitering.
- Diamond grits fixed by means of a vacuum brazing system.
- Recommended for use with ANGLE GRINDERS between 9000 12000 rpm.
- · 45° type tool with 1/32"-3/32"(1-2 mm) edge.
- · Internal diameter: 5/8" (16.1 mm) (M16.
- For exclusive use with PRO-EDGER.

	REF.	Q	(m)	_	RPM	
45X20 SMOOTH FINE GRIT PRO-EDGER MITRING WHEEL	16946	3 11/16"	0"	13/16"	12000 max.	1
45X15 SMOOTH FINE GRIT PRO-EDGER MITRING WHEEL	16985	3 5/16"	0"	9/16"	12000 max.	1





FAST

TURBO TWIST COARSE GRIT PRO-EDGER MITRING WHEEL

- · Grinding wheel for mitering.
- Diamond grits fixed by means of a vacuum brazing system.
- Recommended for use with ANGLE GRINDERS between 9000 12000 rpm.
- The TURBO TWIST model can be used for grinding before finishing with a fine grit, as its grooved design can chip the tile profile.
- · Internal diameter: 5/8" (16.1 mm) (M16 thread).
- · For exclusive use with PRO-EDGER.

To choldowe doe with the Ebden.	REF.	\bigcirc	(i)	;	RPM	<u></u>
TURBO TWIST COARSE GRIT PRO-EDGER MITRING WHEEL 45X15	16984	3 5/16"	0"	9/16"	12000 max.	1






TZ

MAXIMUM POWER, THE MOST ADVANCED MANUAL CUTTER ON THE MARKET.

For intensive cutting of all types of ceramic tile, ideal for porcelain stoneware and extruded stoneware.

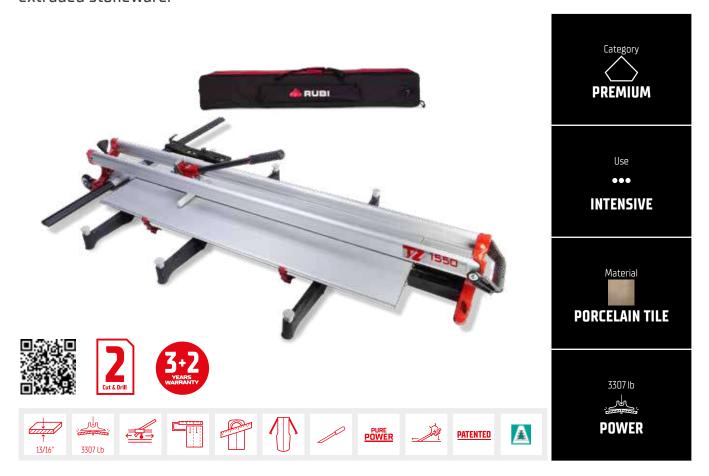

- · Powerful breaking system (up to 3307 lb), operable with just one hand.
- · Accurate with soft slider movements.
- · Large cutting capacity, up to 7/8" (21mm) thickness. Ideal for large format tiles*.
- · Robust with a foldable structure for high strength and easy transportation.
- Excellent performance breaking system: Clean cuts with soft motion.
- Robust chassis, guides and breaking system.
- Swivel square with central pivot for fast and accurate measurements in angle cutting.
- · Adjustable lateral stop for repetitive cuts.
- · Support base for excellent tile placement.
- Easy to transport: rubber wheels with bearings and handle.
- Interchangeable scoring wheels ranging from Ø 5/16" 7/8" (8mm –22mm).
- Includes Ø 5/16" (8 mm) SILVER and Ø 7/8" (22 mm) EXTREME scoring wheels. Reinforced textile bag for transport and protection.
- On models 1300/1550/1800: The reinforced textile bag of these models includes 2 built-in wheels.

	REF.		\longleftrightarrow			-		=	
TZ-850	17956	√	33 7/16"	24x24"	1/8-13/16"	3307 Lb	49.4 Lb	1	8
TZ-1020	17955	√	40 3/16"	27 9/16x27 9/16"	1/8-13/16"	3307 Lb	54.2 Lb	1	8
TZ-1300	17957	√	51 3/16"	35 7/16x35 7/16"	1/8-13/16"	3307 Lb	66 Lb	1	8
TZ-1550	17958	√	61 1/16"	43 5/16x43 5/16"	1/8-13/16"	3307 Lb	73 Lb	1	8
TZ-1800	17999	√	70 7/8"	47x47"	1/8-13/16"	3307 Lb	79.94 Lb	1	8



TX-MAX

PROFESSIONAL MANUAL CUTTER WITH HIGH-PERFORMANCE MULTIPOINT BREAKER.

For intensive cutting of all types of ceramic tile, ideal for porcelain stoneware and extruded stoneware.





- \cdot Highly precise scoring.
- · Entire system highly efficient.
- · Reinforced components. Heavy duty.
- · High breaking power (2646 lb) MASTER POWER. One-handed operation.
- Head with extra-long aluminium sliders with "self-lubricating" friction bearings.
- Portable breaker with aluminium pressure pad, equipped with plastic protector to avoid marking delicate surfaces. Better visibility of the scoring and cutting zone.
- The pressure pad is locked by a ratchet mechanism and is unlocked by the trigger, allowing one-handed scoring and breaking for faster use. Increases performance with both thin and thick materials.
- $\boldsymbol{\cdot}$ Injected-aluminium base, reinforced with a central rib, for increased strength.
- · Floating tables and supplementary arms for large-size ceramic tile, increasing cutting stability.
- Rotating square, with central pivot point and lateral end stop. Greater precision in angle cuts.
- · Handle with soft grip for better ergonomics and comfort.
- Equipped with Ø5/16" (8 mm) SILVER and Ø 7/8" (22 mm) EXTREME scoring wheels. Compatible with the entire plus line of scoring wheels.
- · Includes a carrying case (the 1250 model is equipped with wheels to transport the machine).

	REF.		\longleftrightarrow		and a	`		=	
TX-710 MAX	17910	√	27 15/16"	20x20"	1/8-13/16"	2646 Lb	29.3 Lb	1	10
TX-1020 MAX	17916	√	40 3/16"	27 9/16x27 9/16"	1/8-13/16"	2646 Lb	42.8 Lb	1	10
TX-1250 MAX	17922	√	49 3/16"	33 7/16x33 7/16"	1/8-13/16"	2646 Lb	57 Lb	1	10

^{*}There are some materials over 9/16" (15 mm) thick which, due to their physical properties, possible inner or surface tensions, are difficult to cut manually. It is recommended to make some sample cuts to determine the compatibility of the product.



HIT-PLUS / HIT-PLUS RS

ROBUST AND ACCURATE TILE CUTTER FOR THE MOST DEMANDING WORK ON LARGE FORMAT TILES.

For professional cutting of porcelain and ceramic tiles.





POWER

























- · MAGNET System. The pressure pad for scoring and breaking can be locked and unlocked with one hand. FASTER use and cutting accuracy.
- Full view of the scoring and cutting area thanks to the forward position of the scoring wheel in front of the pressure pad.
- · Closed extruded aluminium structure base for greater RIGIDITY and cutting CAPACITY.
- · With HIGH performance moving breaker.
- · Ground, chrome-plated solid steel guides with anti-corrosion treatment, and 1" (25 mm) diameter for greater torsional strength.
- With a square that includes a side stop for repetitive and 45° cuts.
- Equipped with 4 additional aluminium arms for working with large ceramic tiles.
- Moving guides stop for adjusting the cut to the tile dimension.
- Double tile support with accessory for cutting at 45°.
- Handle with soft grip for better ERGONOMICS and COMFORT.
- Wide range of scoring wheels adaptable to each material (6 mm- ¼", 8 mm- 10 mm ½", 10 mm ½", 12 mm ½" diameter). Includes Extreme 7/8" (22 mm) scoring wheel.
- Equipped with 2 wheels and grip for better tool movement.
- The 63" (1600 mm) long versions include wheels for easier transport.

	REF.		\longleftrightarrow			-	$\stackrel{\circ}{\bigcirc}$		=	
HIT-1200 PLUS	27900	-	48"	33 7/16x33 7/16"	1/8-11/16"	1984 Lb	48.3 Lb	56.4 Lb	1	24
HIT-1600 PLUS	27909	-	63"	39"	1/8-11/16"	1984 Lb	49 Lb	O Lb	1	24
HIT-1800 PLUS	27916	-	70 7/8"	50x50"	1/8-11/16"	1984 Lb	60.1 Lb	O Lb	1	12



HIT-N

ROBUST AND ACCURATE FOR LARGE TILES.

For professional cutting of porcelain and ceramic tiles.







- · Slider assembly with ball bearings for greater smoothness and comfort during scoring.
- · Full view of the scoring and cutting area thanks to the forward position of the scoring wheel in front of the pressure pad.
- · Closed extruded aluminium structure base for greater rigidity and cutting capacity.
- Ground, chrome-plated solid steel guides with anti-corrosion treatment, and 3/4" (20 mm) diameter for greater torsional strength.
- Guides fixed with clamps for greater rigidity.
- With side stop for repetitive and 45° cuts.
- Equipped with 4 additional aluminium arms, for large-sized ceramic tiles.
- · Handle with soft grip for better ergonomics and comfort.
- Wide range of scoring wheels adaptable to each material (6 mm- 1/1, 8 mm- 1/1, 18 mm 1/1, 12 mm 1/1, 22 mm 1/1 diameter).
- · Includes 7/8" (22 mm) scoring wheel.

	REF.		\longleftrightarrow		and a		Ċ		=	
HIT-850 N	26963	-	33 7/16"	24x24"	1/8-9/16"	1764 Lb	24.69 Lb	O Lb	1	24
HIT-1000 N	26992	-	39"	27 9/16x27 9/16"	1/8-9/16"	1764 Lb	27.49 Lb	O Lb	1	24
HIT-1200 N	26961	-	48"	33 7/16x33 7/16"	1/8-9/16"	1764 Lb	31.2 Lb	O Lb	1	24



TR-MAGNET

SUITABLE FOR DIAGONAL CUTS WITH A REVOLVING SQUARE FOR HIGH ACCURACY.

For intensive cutting of porcelain tiles and ceramic tiles.





- $\boldsymbol{\cdot}$ Fast operating system with magnet, for one handed use.
- · Reinforced operating material. Increased breaking power.
- · Revolving square with central pivot for fast and accurate measurements for cutting angles.
- · Floating base with shock absorber for better tile breaking.
- Solid steel guides, 3/4" (20 mm), chrome-plated and rectified, with anti-corrosion treatment for increased torsional strength.
- Multipoint breaker 800 kg of power.
- · Heavy-duty metal arms.
- · Handle reinforced with SOFT-GRIP.
- Lateral end stop for making repetitive cuts.
- · Base extension for large sizes.
- Two-layer base with shock-absorbing effect.
- $\cdot \ \mathsf{High}\text{-}\mathsf{strength} \ \mathsf{aluminium} \ \mathsf{base}.$
- Interchangeable scoring wheels from 1/4" (6mm) to 7/8" (22 mm).
- With Ø 3/8" (10mm) SILVER and Ø 7/8" (22mm) EXTREME scoring wheels and carrying case included.

	REF.		\longleftrightarrow		and a	-		=	
TR-600 MAGNET	17907	V	24"	16 9/16x16 9/16"	1/8-9/16"	1764 Lb	30.6 Lb	2	18
TR-710 MAGNET	17908	V	28"	20x20"	1/8-9/16"	1764 Lb	34.2 Lb	1	15



TP-S

SINGLE GUIDE WITH MULTIPOINT SEPARATOR AND ANGULAR MEASUREMENT.

Ideal for high quality cutting of ceramic and porcelain tiles.







- · Ergonomic handle with incorporated separator for greater speed and ease of use.
- · Swivel bracket with central pivot for fast and accurate measurements.
- · Long-lasting laser engraved square.
- · Reinforced pressure pad.
- \cdot 1/2" (12 mm) reinforced guide. Greater bending resistance and increased precision.
- Lateral end stop for making repetitive precision cuts.
- Two-layer base with shock-absorbing effect.Base extension for large sizes. Carrying handle. (TP-66-S and TP-75-S).
- · Assembly designed to be used by pushing the handle.
- RUBIFLEX bi-material handle.
- Ø 7/8" (22mm) EXTREME scoring wheel included. (Ref. 01901)

	REF.	\longleftrightarrow		annal .	-		=	
TP-66 S	12914	26"	18 1/8x18 1/8"	3/16-13/16"	2205 Lb	25.4 Lb	1	12
TP-75 S	12928	29 1/2"	20 7/8x20 7/8"	3/16-13/16"	2205 Lb	26 Lb	1	12
TP-125 S	11975	49 3/16"	33 7/16x33 7/16"	3/16-13/16"	2205 Lb	54 Lb	1	12

^{*}Some materials with a thickness greater than 9/16" (15 mm) may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibil



TP-T

SINGLE GUIDE CUTTER WITH MULTIPOINT SEPARATOR AND ANGULAR MEASUREMENT.

Ideal for high quality cutting of ceramic and porcelain tiles.







- · Separator set with height adjustment. Optimum separation for each thickness.
- · Swivel bracket with central pivot for fast and accurate measurement of angular cuts.
- · Long-lasting laser engraved square.

2205 I h

- Reinforced pressure pad. 1/2" (12 mm) reinforced guide. Greater bending resistance and increased
- precision. Lateral end stop for making repetitive precision cuts. Two-layer base with shockabsorbing
- effect. Base extension for large sizes. Carrying handle. (TP-66-T and TP-75-T).
- · Assembly designed to be used by pulling the handle.
- RUBIFLEX bi-material handle. Ergonomic and heavy duty construction.
- $\cdot \text{ Cut thickness adjustment system with 3 settings 1/4"-3/8"/3/8"-1/2" / 1/2"-3/4" (6-9 \text{ mm/9-12 mm/12-20 mm})^{*}, fast and precise.}$
- Ø 22mm EXTREME scoring wheel included (Ref. 01901).

	REF.	\longleftrightarrow		animal .	, J	Ċ	=	
TP-66 T	12917	26"	18 1/8x18 1/8"	3/16-13/16"	2205 Lb	25.4 Lb	1	12
TP-75 T	12929	29 1/2"	20 7/8x20 7/8"	3/16-13/16"	2205 Lb	26 Lb	1	12
TP-125 T	11903	49 3/16"	33 7/16x33 7/16"	3/16-13/16"	2205 Lb	51 Lb	1	12

^{*}Some materials with a thickness greater than 9/16" [15 mm] may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibility and alternatively suggest cutting these types of material using an electric tile cutter.



TS-MAX

AUTHENTIC & ORIGINAL: LIGHTWEIGHT AND FUNCTIONAL WITH HIGH PERFORMANCE BREAKER.

For professional cutting of porcelain tiles and ceramic tiles.

























- · Progressive breaking system "SMART POWER" adapts to different material hardness.
- · Wide base. Greater base surface for higher stability and cutting quality.
- · Reinforced components for heavy duty work. High durability.
- · Ergonomic handles. Maximum comfort.
- · Bigger reinforced base for a higher comfort and better stability when cutting.
- Powerful single point breaker. Up to (1764 lb) 800 kg breaking pressure.
- Double guide for direct view of scoring/cutting line.
- Chromed steel guides, rectified and calibrated, with anti-rust treatment.
- Lateral stop for repetitive straight and 45° cuts.
- Interchangeable scoring wheels ranging from $\varnothing 1/4$ " (6mm) to 7/8" (22 mm).
- Includes \varnothing 5/16" (8mm) ENDURE and \varnothing 3/8" (1 0 mm SILVER) scoring wheels and a transport case with reinforced locks and hinges.

	REF.		\longleftrightarrow		animal .			=	
TS-43 MAX (GREY)	18972	√	16 15/16"	12x12"	1/4-9/16"	1764 Lb	19.4 Lb	1	24
TS-66 MAX (GREY)	18974	√	26"	18 1/8x18 1/8"	1/4-9/16"	1764 Lb	29.5 Lb	1	20
TS-75 MAX (GREY)	18975	√	29 1/2"	20 7/8x20 7/8"	1/4-9/16"	1764 Lb	33.3 Lb	1	20



SPEED-MAGNET

FOR THE MOST DEMANDING TILING PROJECTS.

For professional cutting of porcelain tiles and ceramic tiles.





























- · Quick speed system with magnet, ideal for one-handed use. Easy and fast to use.
- · Great visibility during scoring.
- · Reinforced structured elements. High breaking power.
- · Aluminum base for robustness. Light and easy to transport.
- · Solid 13/16" (20mm) steel guides. Chromed and rectified with anti-corrosion treatment for greater resistance to twisting.
- · Multipoint breaker 1764 lb (800kg) power.
- · Reinforced SOFT-GRIP handle.
- · Lateral stop for repetitive cuts and 45 degrees square.
- Interchangeable scoring wheels ranging between \emptyset 1/4" 7/8" (6mm-22mm).
- Scoring wheel Ø 5/16" (8mm) ENDURE. included.
- Direct view of scoring and cutting line.
- 72/92 models:
- -Aluminum lateral support.

	REF.		\longleftrightarrow		and a		Ů			
SPEED-62 MAGNET WITH CASE	14988	√	24 7/16"	17 5/16x17 5/16"	1/8-9/16"	1764 Lb	18 Lb	25.4 Lb	2	24
SPEED-72 MAGNET WITH CASE	14989	√	28 3/8"	20 1/16x20 1/16"	1/8-9/16"	1764 Lb	20.9 Lb	30 Lb	2	18
SPEED-92 MAGNET WITH CASE	14990	√	36 1/4"	25 9/16x25 9/16"	1/8-9/16"	1764 Lb	26 Lb	37 Lb	1	18




SPEED-N

THE MOST VERSATILE TILE CUTTER IN ITS RANGE.

For professional cutting of ceramic tiles, occasionally for porcelain tiles.



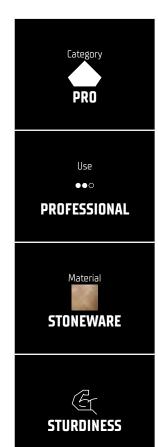













- · Chromed and rectified steel guides, with anticorrosion treatment. Higher durability.
- · Aluminum base for higher robustness.
- · Light and easy to transport.
- With lateral stop for repetitive cuts and 45 degree squares.
- Interchangeable scoring wheels ranging between Ø 1/4" (6mm) to Ø 3/8" (10mm).
- \cdot Scoring wheel Ø 5/16 (8 mm) SILVER included.
- · Direct vision of scoring and cutting line.
- 72/92 models;
- -Aluminum lateral support.

	REF.		\longleftrightarrow		and a	ightharpoons		=	
SPEED 42-N WITHOUT CASE	14949	-	17"	12x12"	3/16-9/16"	12 Lb	-	2	64
SPEED-62 N WITH CASE	14985	√	24 7/16"	17 5/16x17 5/16"	3/16-9/16"	15 Lb	23.4 Lb	2	24
SPEED-72 N WITH CASE	14986	V	28 3/8"	20 1/16x20 1/16"	3/16-9/16"	18.1 Lb	27.6 Lb	2	18
SPEED-92 N WITH CASE	14987	V	36 1/4"	25 9/16x25 9/16"	3/16-9/16"	24 Lb	35.1 Lb	1	18




FAST

LIGHT AND VERSATILE CUTTER.

For professional cutting of ceramic tiles.























- · Extruded aluminum base.
- · New rigid and stable separator.
- · Reinforced 3/4" (18mm) guides for greater resilience.
- · Four side brackets for a great additional support.
- · Wider foam base.
- Chromed steel guides with anti-rust treatment.
- · Lateral stop with 45° square.
- Base for greater support of the tile.
- Interchangeable scoring wheels from Ø1/4"(6mm) to 3/8" (10mm).
- \cdot Ø1/4" (6mm) SILVER scoring wheel included.
- \cdot Two-layer base with shock absorption.
- · Direct view of the scoring and cutting line.

	REF.		\longleftrightarrow		and a	Ö		=	
FAST-65	13940	-	25 9/16"	17 11/16x17 11/16"	1/2"	13.9 Lb	O Lb	4	48
FAST-85	13941	-	33 7/16"	24x24"	1/2"	16.5 Lb	O Lb	2	32

VERSATILITY



STAR PLATINUM

LIGHT AND VERSATILE MANUAL CUTTER.

For professional cutting of ceramic tiles, occasionally for porcelain tiles.





















- · Multipoint breaker with aluminium pressure pad and steel breaker bar for greater ROBUSTNESS and breaking POWER.
- · Aluminium tool holder, more RIGID and STABLE for EASIER tile scoring.
- · Cast aluminium base, LIGHT and STRONG with side extensions for large pieces.
- · Cast ALUMINIUM guide supports for greater ROBUSTNESS.
- Dual guide for greater VISIBILITY of the scoring and cutting line.
- Solid, chromed, ground and calibrated steel guides with anti-corrosion treatment.
- · Side stop with millimetre scale and 45° square.
- Interchangeable scoring wheels from Ø1/4"(6mm) to 3/8" (10mm).
- Ø 1/4" (6 mm) SILVER scoring wheel included.

	REF.	\longleftrightarrow		and a	Ö		
STAR-51 PLATINUM	15901	20 1/16"	14 3/16"	1/2"	8.29 Lb	6	1
STAR-63 PLATINUM	15902	24 13/16"	17 11/16"	1/2"	9.68 Lb	6	1



SCORING WHEELS

	TILE TYPE							
TILE SURFACE		CERAMIC WALL		CERAMIC FLOOR PORCELAIN Bila - Bilb Bia			QUARRY AI - AIIa - AIIb - AIII	
Smooth polished	6 mm • ½" 8 mm • ¾" 10 mm • ¾" 18 mm • ¾"	Silver* Silver/Endure Silver Silver			6 mm • ¼" 8 mm • ½;" 10 mm • ¾" 18 mm • ¾"	Silver Silver/Endure* Silver Silver		
Smooth Matt	6 mm • ¼" 8 mm • ¾" 10 mm • ¾" 18 mm • ¾" 22 mm • ¾"	Silver* Silver/Endure Silver Silver Silver/Extreme	6 mm • ¼" 8 mm • ¾" 10 mm • ¾" 18 mm • ¾" 22 mm • ¾"	Silver Silver/Endure Silver* Silver Silver/Extreme	6 mm • ¼" 8 mm • ¾" 10 mm • ¾" 18 mm • ¾" 22 mm • ¾"	Silver Silver/Endure* Silver Silver Silver/Extreme	8 mm • 5%" 10 mm • 3/" 18 mm • 3/" 22 mm • 7/6"	Silver/Endure Silver Silver* Silver/Extreme
Textured	8 mm • %e" 18 mm • %" 22 mm • %"	Silver/Endure* Silver Silver/Extreme	8 mm • 1/4." 18 mm • 1/4." 22 mm • 1/4."	Silver/Endure Silver* Silver/Extreme	8 mm • 5%;" 18 mm • 3%;" 22 mm • 3%;"	Silver/Endure Silver* Silver/Extreme	18 mm • ¾" 22 mm • ¼"	Silver* Extreme
Highly textured	8 mm • %e" 18 mm • %" 22 mm • %"	Endure Silver Extreme*	8 mm • 5/4." 18 mm • 3/4" 22 mm • 7/6"	Endure Silver Extreme*	8 mm • 5/4." 18 mm • 5/4." 22 mm • 7/4"	Endure Silver Extreme*	18 mm • ¾" 22 mm • ¾"	Silver Extreme*
Structured	8 mm • %e" 18 mm • ¾" 22 mm • ¾"	Endure Silver Extreme*	8 mm • 5/4" 18 mm • 3/4" 22 mm • 7/4"	Endure Silver Extreme*	8 mm • 5/4;" 18 mm • 3/4" 22 mm • 3/4"	Endure Silver Extreme*	18 mm • ¾" 22 mm • ⅓"	Silver Extreme*



SCORING WHEELS

Refs: Ø mm:							PRO					UPERPRO		PREM		
								VER					IDURE		XTREN	
		಄	Refs: Ø mm:	1945	1902	19 59	1946	1904	1960	1950 18	1905 18	1906	1903	1901	1907	1900
			Ø inch:			5/16		3/8			3/4		5/16	7/8		7∕8
						PLUS		PLUS			PLUS		PLUS			PLUS
MOII	sive	TZ				0		0					0			0
REM	••• Intensive															
PREMIUM ■	÷	TX MAX				0		0					0			0
		TP														
		IP												0		
		TR MAGI	NET	0	0		0			0		0			0	
		HIT PLUS	S RS	0	0		0			0		0			0	
2 PRO	sional															
UPE E	•• · Professional	HIT PLUS	S	0	0		0			0		0			0	
SUPERPRO	•															
		HIT N		0	0		0			0		0			0	
		TS MAX		0	0		0			0		0			0	
		SPEED M	/AGNET	0	0		0			0		0			0	
		SPEED N	l	0	0		0					0				
		FAST		0	0		0					0				
20		STAR PL	ATINUM	0	0		0					0				
◇ PRO	• ° o Ocasional															
~		STAR		0	0		0					0				
		DDAGT			_											
		PRACTIC		0	0		0					0				
		BASIC							0							
															■ Inc	



PREMIUM SCORING WHEELS

PLUS SCORING WHEELS FOR TZ & TX-MAX PROFESSIONAL CUTTERS.

PATENTED





8MM PLUS SILVER SCORING WHEEL (05/16")

- $\boldsymbol{\cdot}$ For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for smooth and slightly textured surfaces.
- Tungsten carbide scoring wheel of high resistance and duration.
- Shaft made with a patented geometry for a maximum precision and minimum vibration.

	REF.	=	
8MM PLUS SILVER SCORING WHEEL (05/16")	01959	10	3600



8MM PLUS SCORING WHEEL (05/16") ENDURE

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for smooth, textured and Highly textured surfaces.
- · Wheel made of tungsten carbide.
- Patented geometry shaft, for maximum precision and minimum vibration.
- · Extra-long life.





10MM PLUS SILVER SCORING WHEEL (03/8")

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for smooth and slightly textured surfaces.
- Tungsten carbide scoring wheel of high resistance and duration.
- Shaft made with a patented geometry for a maximum precision and minimum vibration.

	REF.	=	
10MM PLUS SILVER SCORING WHEEL (03/8")	01904	10	3600



SILVER

18MM PLUS SILVER SCORING WHEEL (03/4")

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for Highly textured.
- · Tungsten carbide scoring wheel of high resistance and duration.
- Shaft made with a patented geometry for a maximum precision and minimum vibration.

	REF.	=	
18MM PLUS SILVER SCORING WHEEL (03/4")	01905	10	3600



> PREMIUM EXTREME

22MM SCORING WHEEL PLUS EXTREME(0 7/8")

- For ceramic walls, ceramic floor, porcelain and rustic ceramic floor, ideal for Highly textured and structured surfaces.
- Tungsten carbide scoring wheel with a superficial titanium treatment.
- · Mounted on bearing. Enhanced smooth user perception.
- Extra-long life.

	REF.	=	
22MM SCORING WHEEL PLUS EXTREME (0 7/8")	01900	10	



SUPERPRO SCORING WHEELS

 FOR TR-MAGNET, HIT-PLUS, HIT-N, TS-MAX AND SPEED-MAGNET CUTTERS.

PATENTED





6MM SILVER SCORING WHEEL (01/4")

- For ceramic wall, ceramic floor and porcelain, ideal for tiles with smooth and slightly textured surfaces.
- Tungsten carbide scoring wheel of high resistance and durability.
- Lock system patented model with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF.	=	
SCORING WHEEL 01/4" (6MM) SILVER	01945	10	4600



8MM SILVER SCORING WHEEL (05/16")

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for smooth and slightly textured surfaces.
- Tungsten carbide scoring wheel of high resistance and durability.
- Lock system patented model with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF.	=	
SCORING WHEEL 05/16" (8MM) SILVER	01902	10	4600



ENDURE

SILVER

SUPERPRO

8MM ENDURE SCORING WHEEL (05/16")

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for smooth, textured and Highly textured surfaces.
- · Wheel made of tungsten carbide.
- Lock system patented geometry shaft, for maximum precision and minimum vibration.
- Extra-long life.

	REF.	=
SCORING WHEEL 05/16" (8MM) ENDURE	01906	5



PRO

10MM SILVER SCORING WHEEL (03/8")

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for smooth and slightly textured surfaces.
- Tungsten carbide scoring wheel of high resistance and durability.
- Lock system patented handle made with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF.	=	
SCORING WHEEL 03/8" (10MM) SILVER	01946	10	4600



PRO SILVER

18MM SILVER SCORING WHEEL [03/4"]




- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for Highly textured.
- Tungsten carbide scoring wheel of high resistance and durability.
- · Lock system patented shaft geometry; maximum precision and minimum vibration.
- Compatible with FAST cutters.

	REF.	=	
SCORING WHEEL 03/4" (18MM) SILVER	01950	10	3600



EXTREME

22MM SCORING WHEEL (07/8") EXTREME



- \cdot Tungsten carbide scoring wheel with a superficial titanium treatment.
- Patented lock system geometry shaft, for maximum precision and minimum vibration.
- Patented model for maximum precision and minimum vibration.
- · Extra-long life.

	REF.	=
SCORING WHEEL 07/8"(22MM) EXTREME	01907	5

SUPERPRO SCORING WHEELS

 \cdot Adaptable scoring wheel for TP & TQ Professional cutters.





EXTREME

22MM SCORING WHEEL PLUS EXTREME (0 7/8") TP/TQ

- · For sharp cuttings in hard ceramic and porcelain tiles.
- Tungsten Carbide scoring wheel with a superficial Titanium treatment.
- Mounted on bearing. Enhanced smooth user preception.
- Extra-long life.

	REF.	=
22MM SCORING WHEEL PLUS EXTREME (0 7/8") TP/TQ	01901	5

SCORING WHEEL SETS

SETS OF SCORING WHEELS OF DIFFERENT DIAMETERS WITH BOX.





SILVER



SCORING WHEEL SET 2

- For TS-MAX, TR-MAGNET, TF-MAX & SPEED-MAGNET models, includes 1 scoring wheel of Ø1/4" (6mm), Ø5/16" (8mm), Ø3/8" (10mm), Ø3/4" (18mm) (2 units) SILVER.
- In plastic box with transparent cover.
- Supplied in blister.

	REF.	=	
SCORING WHEEL SET 2	01969	5	450



TC-125 G2 CIRCULAR CUTTER KIT

CIRCULAR CUTTER, SMOOTH AND PRECISE, IDEAL LARGE FORMAT TILES.

For cutting ceramic and porcelain tiles. Suitable for use with natural and synthetic stone. Especially suitable for large format tiles.





- · Includes a set of suction cups suitable for all surfaces for fixing the guide to the part.
- Equipped with a carbon steel slide on adjustable double set stainless steel radial bearings.

DESIGN

- · Double dust reduction/control system. Dry and wet cutting.
- · Height-adjustable cutting head (saw effect), hinged from 0° to 45°. (mitre). FAST adjustment system.
- · More ergonomic. Additional BI-MATERIAL handle, mainly for mitre cuts.
- Compatible with discs of 5" (125 mm)or 4-1/2" (115 mm) diameter. (Suitable for discs with reinforcement plate, VIP type).
- Switch with SAFETY lock. Prevents UNINTENTIONAL start-up. Electrical cable with PRCD.
- Direct connection to vacuum cleaner. Includes adapter for other models and brands 17/16", 15/8" and 2" (37, 42 and 50 mm) diameter.
- Quick connection and regulating valve for hose (16 mm diameter). Rubber stopper for suction outlet. IMPROVES ergonomics during wet cutting.
- Cast aluminium disc protector with transparent polycarbonate cover with quick opening and closing system. FACILITATES disc change and MINIMISES the projection of particles and water.
- Tilting side guard for mitre cuts. REDUCES water splashing and IMPROVES dust suction.
- Each set contains: two 61" (155 cm) guides, one 25 9/16" (65 cm) guide, 1 TC–125 cutter, 1 Ø5" disc, 2 fixing suction cups, 2 clamps, 2 spacers, 1 vacuum cleaner adapter, 1 carry case and 1 carrying bag. FACILITATES transport and handling.

	REF.		5	RPM	W	\longleftrightarrow		, <i>dilliti</i>	\bigcirc				=	
TC-125 G2 120V 50/60HZ USA	51977	√	110-130V 50-60Hz	13800	1250	126"	13/16-1"	9/16-11/16"	4 1/2-5"	7/8"	14 3/16x9 5/8x8 1/4"	31 Lb	1	
GUIDES KIT TC-125 G2	51949	√											1	

The kit is a cutter reference plus the guide reference (Ref.51949) It must be used with the SLIM SYSTEM G2 guides.



SLAB CUTTER G3

MANUAL CUTTING SYSTEM WITH CONNECTABLE GUIDES.

For manual cutting of large porcelain tiles.













- · System with movable suction cups integrated in the guides. Special grey rubber suction cups for rough surfaces that won't leave marks on the tile.
- · Carriage with lever mechanism for perfect scoring. Extreme roller guide.
- · Highly reinforced guides. Easily interconnected by means of an adjustable lever mechanism.
- · Transport bag with padded handles and pockets for accessories.
- Breaking system by adjustable nippers with soft-grip handle, which facilitates and ensures progressive breaking of the tile, thus reducing the risk of cracking. 2-in-1 nippers and breaker.
- \cdot Ø 7/8" (22 mm) RUBI EXTREME roller guide made of Tungsten Carbide with Titanium Carbide treatment and bearings, to offer better scoring performance and quality.
- Each set contains: Three 44 1/8" (112 cm) guides, 1 marker carriage with 7/8" (22 mm) roller guide, 1 set of nippers and 6 suction cups.
- Transport bag with padded handles and pockets for accessories.

	REF.		\longleftrightarrow	and a	Ĉ		=
SLAB CUTTER G3	16900	√	126"	1/8-3/8"	24 Lb	35.7 Lb	1

The Slab Breaker Plus (ref. 18917) must be used for thicknesses from 3/8" (10 mm) to 9/16" (15 mm).



SLIM CUTTER G2

HAND CUTTING SYSTEM WITH CONNECTABLE GUIDES.

For hand cutting of large porcelain tiles with thicknesses between 1/8" and 3/8" (3 and 10 mm).



- · High-scoring power thanks to the new tilting carriage design and its fixing on the reinforced guides.
- · Maximum 14 3/16" (360 cm) cutting capacity (extendable) thanks to its connectable guides. Allows a 4 3/4" (120 cm) cut with a single guide.
- Excellent fixing of the guides on the tile by means of 3 natural rubber suction cups, suitable for rough surfaces, with double anchoring point.
- · It prevents tile breakage by means of the progressive breaking system of the adjustable nippers with soft-grip handle. 2-in-1 nippers and breaker.
- $\boldsymbol{\cdot}$ Recommended thicknesses between 1/8" and 3/8" (3 1 0 mm).
- · Specially designed for large tiles, it provides a perfect cut without chipping with a light and easy-to-store cutter.
- High durability of the Ø 7/8" (22 mm) RUBI EXTREME roller guide. Manufactured in tungsten carbide with tungsten carbide treatment and bearings, it offers better performance and high scoring quality.
- Easily transportable. It includes two practical reinforced transport bags with compartments, handles and a shoulder strap. These can be transported separately or together with the use of a simple connecting system.
- Each set contains: Two 61" (155 cm) guides, one 21 1/2" (65 cm) guide, 1 marker carriage with 7/8" (22 mm). roller guide, 1 set of nippers, 3 suction cups, 1 Allen key and 2 transport bags.

	REF.		\longleftrightarrow	and a		=
SLIM CUTTER G2	23999	√	141 3/4"	3/8"	O Lb	1

The Slab Breaker Plus (ref. 18917) must be used for thicknesses from 3/8" (10 mm) to 9/16" (15 mm).



CUTTING







SLIM CUTTER G2 SUPPLEMENT GUIDES

· Aluminum guides for the G2 system.

	REF.	=
SLIM CUTTER G2 SUPPLEMENT GUIDE 25 9/16" [65 CM]	52948	1
SLIM CUTTER G2 SUPPLEMENT GUIDE 61" (155 CM)	51999	1





SLAB CUTTER G3 SUPPLEMENT GUIDE

 \cdot Extruded aluminium guide with extra 44" (112 cm).

 $\boldsymbol{\cdot}$ Includes two suction cups integrated into the guide.

	REF.	=
SLAB CUTTER G3 SUPPLEMENT GUIDE AND SUCTION CUPS	16908	1





SLIM CUTTER G2 HEAD

- Tilting carriage with an ergonomic handle for the G2 cutting system.
- Improves the fixing on the guides.

	REF.	=
SLIM CUTTER G2 HEAD	27911	1





























FAST

SLAB BREAKER NIPPERS

- Nippers/breaker for large porcelain tiles of between 1/8" to 3/8" (3 to 10 mm) thick.
- Nippers with bi-material soft-grip handle with clip to keep the nippers closed.
- High breaking power for tiles from 1/8" to 3/8" (3 to 10 mm) thick.
- Reinforced nippers designed for greater comfort and durability.
- · Can be used as nippers for thinner tiles and as a breaker if the thickness or hardness of the material requires it. 2-in-1 nippers and breaker.

	REF.	=
SLAB BREAKER PLIERS	54918	1





A POWER

SLAB BREAKER PLUS

- Auxiliary breaker for the cut of slim porcelain slabs or large tiles.
- To separate thicknesses of 1/4" up to 3/4" (6 mm up to 20 mm).
- Soft-grip handle for a better comfort and ergonomic.
- · With width adjustment system, to achieve an equal, uniform and symmetric distribution of breaking forces when cutting narrow strips.
- Rubber pressure pad for greater control and more precise separation.

	REF.	=
SLAB BREAKER PLUS	18917	1





SUCTION CUP FOR SLIM CUTTER

• Replacement suction cup for Slim Cutter and TC125 guides.

	REF.	=
SUCTION CUP FOR SLUM CUTTER.	18834	1



SLAB TRANS HEAVY DUTY N

FULLY ADJUSTABLE FRAMEWORK FOR HANDLING LARGE FORMAT CERAMIC, PORCELAIN AND NATURAL STONE SLABS.

Especially suited for handling thicker sheet tiles.





















- · Reinforced aluminium profile joined by a system of sliders. Greater structural strength.
- · Includes 2 perpendicular aluminium guides, for greater stiffness.
- Equipped with four retractable and removable Soft-Grip handles to adapt to every situation during installation. Six light coloured vacuum suction cups that do not leave marks on the tile. Increased load capacity.
- \cdot Fast and easy to assemble and disassemble. Easy fix system.
- · Black anodized finish.
- · Maximum load capacity: 375 lb (170 kg).
- Maximum handling size: 11' 1 0" x 5' 3" (360 x 160 cm).
- · Unitary box with RUBI's flexography and full-colour label.


	REF.			=	
SLAB TRANS HEAVY DUTY N	18982	149 5/8x66 15/16x9 5/16"	78 Lb	1	1


Additional vacuum suction cups available can be attached to the system but it does not increase the maximum load capacity of 375 lb (170 kg).



SLIM EASY TRANS PLUS

FOR TRANSPORTING OF LARGE-FORMAT SHEET TILES.

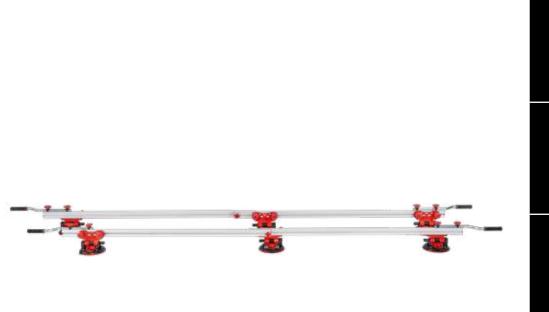

















- Includes 2 retractable and adjustable guides of 67" 126" (170 to 320 cm) of reinforced aluminium and six 8" (20 cm) suction cups (ref. 18827) with high load capacity. Provide added safety and reliability.
- The optimal recommended gripping distance is 27 9/16" (700 mm) distance between handles.
- The soft-grip handles can slide and be removed through the top slot of the guides.
- Multiple position settings for the suction cups.
- Each guide is suitable for working individually, with a maximum load capacity of 88 lb (40kg) at their maximum length.
- · Maximum load capacity: 176 lb (80 kg).
- For workpieces with a maximum length of 126" (3.2 m).

	REF.		Ċ		
SLIM EASY TRANS PLUS	18976	651 3/16x100x89 3/4"	53 Lb	1	1


Adding more suction cups does not increase the load capacity.



SLIM EASY TRANS

TO TRANSPORT LARGE PORCELAIN SLABS.





••• OCCASIONAL



















- This system can be used as a complement to the Slim cutter (Ref. 18911).
- Includes two retracting guides adjustable from 63"–126" (160 to 320 cm) and 10 suction cups for securing rough and smooth surfaces (Ref.66929).
- Maximum load of the unit: 132 lb(60 kg).
- For workpieces with a maximum length of 118" (3 m).
- HOLDING BAR SLIM EASY TRANS (Ref. 18819) is an accessory available to this product.

	REF.		=	
SLIM EASY TRANS	18910	36.6 Lb	1	12

For every two suction cups (Ref. 18915), the load is increased by 22lb (10kg). Up to a maximum of 242.5 lb (110kg), using 10 suction cups.







SLAB TRANS MINI

FOR TRANSPORTING CERAMIC SHEETS AND LARGE-FORMAT TILES WITH A MAXIMUM RECOMMENDED SIZE OF 60X60" (150 X 150 CM).



- · Ideal for medium formats. It adds less weight to the tile conveyor assembly when transporting medium-sized formats.
- Retractable aluminium guide. Allows us to handle and transport tiles 39 3/8" (100 cm) and 83" (210 cm) in size. Especially recommended for formats of up to 60x60" (150 x 150 cm), 1/4" or 5/16" (6 or 8 mm) thick, used diagonally.
- · Highly reinforced, adjustable and removable soft-grip handles. With an anti-twist and soft-grip system which ensures a better grip of the assembly.
- · 2 interchangeable Ø8" (20 cm) suction cups, can be placed at any point on the guide.
- $\boldsymbol{\cdot}$ Suction cups with a safety indicator.
- Each suction cup, of Ø8" (20 cm) in diameter and with a high-load capacity, has an indicator that warns us in the event of a loss of suction.
- The suction cups have a protector to prevent damage during transport.
- With a maximum load capacity of 88 lb (40 kg) at their maximum length.
- Maximum load capacity: 121 lb (55 kg).

	REF.	Ĉ	*		=
SLAB TRANS MINI	18983	18.3 Lb	24.7 Lb	90 15/16x10 1/4x7"	1



SLAB TROLLEY

TRANSPORT AND HANDLING SYSTEM FOR LARGE-FORMAT SHEET TILES.

Especially suitable for handling thicker pieces.

















- Transport system and manoeuvre for large format tiles.
- Especially suitable for thicker/heavier slabs.
- Exclusive to the SLAB TRANS HD N (Ref.18982), SLIM TRANS PLUS (Ref. 18976+18819) and SLIM EASY TRANS systems (Ref.18910+18819).
- Easy and quick to assemble and disassemble. Easy fix connection system.
- · Ultra light and compact.
- Extendable support arm for greater ergonomics when loading and unloading pieces on the workbench.
- Maximum load capacity: 309 lb (140 kg.) including material and trans system.

	REF.		*	=	
SLAB TROLLEY	18934	46 1/16x29 5/16x6 1/2"	33 Lb	1	5








SLAB TABLE

WORK BENCH FOR CUTTING AND HANDLING LARGE-FORMAT SHEET TILES USING THE SLAB SYSTEM RANGE OF TOOLS.







INTENSIVE







- · Workbench to support the cutting and preparation of large format materials using the tools of the Slab system range.
- $\boldsymbol{\cdot}$ Extra-reinforced bars thus increasing the rigidity of the workbench.
- The structure of the table together with the levelling feet achieves a greater stability of the set.
- · Assembly and disassembly fast and easy. Easy fix connection system (hammerhead screws).
- Folding legs. Equipped with security system against involuntary closing.
- Dimensions in working position: 71"x41"x28" (180x104x70 mm).
- Dimensions in transport position: 71"x41"x8" (180x104x20mm).
- Working height: 27 4/7" (70 cm).
- · Maximum load capacity: 551 lb (250 kg).

	REF.				=	
SLAB TABLE	18935	70 7/8x41 1/8x27 9/16"	76.1 Lb	79 Lb	1	9









SLAB TABLE VERSA-TILE

WORK BENCH FOR CUTTING AND HANDLING LARGE-FORMAT CERAMIC SHEETS, SPECIFICALLY DESIGNED FOR THE SLAB RANGE OF TOOLS.







- Dimensions in working position: The table is extendable from 43 3/10" to 59 5/8" (1100 to 1515 mm), which allows you to handle the widest formats. Its length is 71" (1 800 mm).
- Its folding legs and two side wheels make it easy to transport and store.
- Double working height: 27 9/16" and 33 1/6" (70 and 84 cm), which means it can be adapted to different needs, allowing all types of work to be carried out.
- Maximum load capacity: 573 lb (260 kg). Even the largest tiles can be loaded.
- Thanks to its two movable bars and wide T-shaped profiles, you can have a support surface that allows you to work as if on a workbench for the use of smaller tools, such as hand-held cutters, for example.

	REF.		Ů	*	=	
SLAB TABLE VERSA-TILE	18984	70 7/8x60 1/4x33 1/16"	90 Lb	98.3 Lb	1	9











SLAB TABLE LENGTHEN ACCESSORY

· Accessory for the SLAB VERSA-TILE TABLE, it allows you to extend the table up to 118" (3 m) while maintaining its basic features. Also compatible with the SLAB TABLE.

	REF.	=
SLAB TABLE LENGTHEN ACCESSORY	21931	1



○ PREMIUM

SLAB TABLE TILE LIFTING ACCESORY (C-15)

- Makes it possible to lift the workpiece 13/4" (4.5) cm from the SLAB TABLE/SLAB VERSA-TILE TABLE profiles (only "T" profiles).
- Ideal for all types of cross-cutting and drilling on the table without the risk of damaging the profiles.

	REF.	=
SLAB TABLE TILE LIFTING ACCESORY (C-15)	21975	1





SLIM EASY TRANS SUPPLEMENTARY GUIDE SET / SLIM EASY TRANS PLUS

- · Slim Easy Trans has a set of perpendicular guides for increased stability.
- With the supplementary guide set we increase the maximum load capacity to 265 lb (120 kg).
- Increases the rigidity of the unit. Facilitates handling of the pieces. Fast and easy to assemble and disassemble. Black anodized finish.

	REF.	
SLIM EASY TRANS / SLIM EASY TRANS PLUS	18819	1
SUPPLEMENTARY GUIDE SET		





TILE BEATING BLOCK

- For a good settlement of tiles. Waterproof and high wear resistance wood. Perfect flatness. Dimensions: 15 3/4" x 5 3/4" (40x14,5 cm).
- With white natural rubber sheet to prevent damage to the tile.

	REF.	<u>-</u>
TILE BEATING BLOCK 40 X 14,5 CM. WITH RUBBER	72980	1





ERGONOMIC

ERGO TILE BEATER

- · For a good settlement of tiles.
- It facilitates the extraction of the air that remains between the tile and the adhesive.
- With a bi-material handle for maximum comfort and ergonomics.
- · Metal plate for complete rigidity and long durability, reinforced with rubber to avoid damaging the ceramic tiles. Exact, balanced weight.

1	
	1



RUBI TRILLER

COMPACT MANUAL VIBRATOR.

Especially designed for vibrating large format tiles.

















- Compact manual vibrator especially designed for vibrating large format tiles.
- Expels the air trapped under the tile and maximises the adhesive coverage.(Do not use for a long period of time on the same tile to prevent the adhesive escaping.)
- · Suitable for use on floor and wall tiles.
- Compact and light design weighing just 11 Lb (4.8 kg) to facilitate work on walls.
- Floating carbon steel chassis with vibration reduction system for greater user comfort.
- Folded 1/16" (1.5 mm) mm steel sheet chassis, powder painted in red.
- Vibration plate made of PUR plastic, non-marking and easy to change.
- $\boldsymbol{\cdot}$ Easy to change, non-marking contact plate.
- Easy to operate tool with ergonomic double grip.
- · Non-adjustable vibration frequency.

	REF.	5	RPM		ightharpoons	=
RUBI TRILLER USA	18978	110-130v 50/60Hz	2940	11 1/2x9 1/2x7 5/16"	10.6 Lb	1



RUBI TRILLER ENERGY CAS

COMPACT MANUAL BATTERY-POWERED VIBRATOR.

Especially designed for vibrating large-format ceramic sheets.













- Expels the air trapped under the tile and maximises its wetting. (Do not use for a long period of time on the same tile to prevent the adhesive escaping.)
- · Suitable for use on floor and wall tiling (suitable for vertical and horizontal application, floors and walls).
- · Compact and light design weighing just 13 lb (5.8 kg) to facilitate work on vertical surfaces.
- Floating carbon steel chassis with vibration reduction system for greater user comfort.
- Folded 1.5 mm steel sheet chassis, powder painted in red.
- · Vibration plate made of PUR plastic, non-marking and easy to change.
- Easy to operate tool with ergonomic double grip.
- It has a speed regulator to adapt the vibration to the material and substrate being worked on. It includes a circuit breaker safety system.
- · Powered by a Li-HD 12V 4Ah battery (compatible with 12 V batteries from the Metabo CAS platform).
- Includes Rubi BMS (Battery Management System), this is a quality electronic controller that protects the battery system from any overloads and overheating. Furthermore, it optimises the performance of the battery by offering a regular energy flow and extends the autonomy of use as well as the battery life.

	REF.	5	RPM			=
RUBI TRILLER ENERGY USA	10973	12V 4Ah	3000	9 1/2x11 1/2x7 1/16"	12.8 Lb	1
BATTERY CAS LIHD 12V 4AH	85904	12V 4Ah				1




OCTO-PLUS ENERGY CAS

BATTERY-POWERED SUCTION CUP FOR THE HANDLING OF CERAMIC TILES.

Adapts to the surface finish without leaving a mark on the tile.



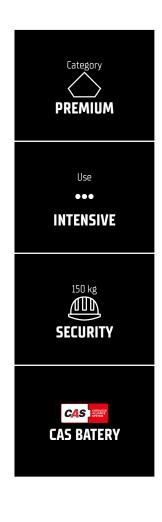









- Bi-material and ergonomic handle.
- Powered by CAS Li-lon 12V 2Ah battery, compatible with Metabo brand battery tools and with all those that are part of the CAS 12V platform.
- LED battery charge level indicator.
- · Maximum load capacity: 331 lb (150kg).*
- Pressure release mechanism.
- · Load loss indicator (LED).
- In the event of a loss of pressure, the vacuum pump is automatically reactivated until the working pressure is reached again.
- \cdot *only on smooth surfaces and horizontal loading.

	REF.	5	O		*	=
OCTO-PLUS ENERGY CAS USA	66976	12V 2Ah	8"	2 Lb	3.3 Lb	1
BATTERY CAS LIPOWER 12V 2AH	85903					1



QUAKE ENERGY CAS

LIGHT AND COMPACT VIBRATOR

For tiles or porcelain sheets.













- Designed to prevent the generation of encapsulated air bubbles between the adhesive and the back of the ceramic tile, thus facilitating ideal adhesion between the adhesive and the tile.
- The low weight and wireless system make it easy to use on vertical supports and work at height.
- The double handle with bi-material handle offers greater ergonomics and comfort to the user, and its geometry facilitates better control and stability of the tool during vibrating.
- The contact base with the ceramic tile does not leave marks and is easily replaceable.
- The front handle improves ergonomics and gives the user a better experience.
- Powered by CAS Li-lon 18V 2Ah battery, compatible with Metabo brand battery tools and with all those that are part of the CAS 18V platform.
- It has a progressive on-off switch (rpm control).
- LED battery-charge indicator.
- New CAS platform LI-POWER 18V-2 Ah battery.

	REF.	5	RPM	\bigcirc	Ċ	*	
QUAKE ENERGY CAS USA	60938	18V 2Ah	10000 Max	5"	3.3 Lb	4 Lb	1
BATTERY CAS LIPOWER 18V 2AH	85901						1





SUPERPRO

•• PROFESSIONAL

SECURITY

USB BATTERY

OCTO-USB ENERGY

- Battery suction cup designed for handling ceramic tiles.
- 3.7V battery integrated in the suction cup and charging via USB-C cable.
- In case of loss of pressure, the vacuum pump is automatically reactivated until it reaches working pressure again.
- · Maximum load capacity: 309 lb (140 kg).
- Includes transport case.

	REF.	5	O		*	=
OCTO-USB ENERGY	66967	3.7 V 1.2 Ah	8"	2 Lb	3.3 Lb	2





TRIPLE SUCTION CUP

- Body made of highly resistant aluminium. With ergonomic handle for greater comfort.
- · Maximum load of capacity: 220lbs (100 kg).

	REF.	=	
TRIPLE SUCTION CUP	66904	1	80





VACUUM

SECURITY

SC-200 SUCTION CUP WITH VACUUM PUMP

- Suction cup for handling large and heavy tiles.
- · Adapts to any surface finish.
- Suction applied by manual vacuum pump.
- · Load loss indicator (red mark).
- Pressure-release mechanism.
- · Maximum load capacity: 243 lb (110 kg).

	REF.	<u> </u>
SC-200 SUCTION CUP WITH VACUUM PUMP	18919	1



GSC-200 GREY VACUUM SUCTION

- · Suction cup for the manipulation of large ceramic tiles and heavy porcelain slabs.
- Adapts to any surface without leaving any marks.
- · Fixing by vacuum manual pump.
- · Load loss indicator (red mark).
- · Pressure release mechanism.
- · Maximum load capacity: 243 lb (110 kg).
- · High resistance plastic body.

	REF.		=
GSC-200 GREY VACUUM SUCTION	21951	3.3 Lb	1









ROUGH

RM ROUGH SURFACE SUCTION CUP

- Suction cups for handling tiles with rough and/or slightly structured surfaces.
- · Injected polycarbonate body. Very light.
- Metal reinforcement in the lever base for greater tensile strength.
- Ergonomic polypropylene handle for faster, safer handling.
- · Natural rubber.
- · Maximum load capacity:55 lb (25 kg).
- · Suction cup diameter: 4 3/4" (120 mm).

	REF.	=
RM ROUGH SURFACE SUCTION CUPS	66929	1





ROUGH

RM ROUGH SURFACE DOUBLE SUCTION CUP

- Double suction cup for handling tiles with rough and/or slightly structured surfaces.
- · Body made of highly resistant aluminium.
- Metal reinforcement in the lever base for greater tensile strength.
- Ergonomic polypropylene handle for faster, safer handling.
- · Natural rubber.
- · Maximum load capacity: 121lb (55 kg).
- · Suction cup diameter: 4 3/4" (120 mm).

	REF.	<u> </u>
RM ROUGH SURFACE DOUBLE SUCTION CUP	66952	1





TILE GAP CLOSER

- · For a precise and easy adjustment of the gap between tiles during floor or wall
- · Large diameter suction cups 5 7/8" (150 mm) for any kind of tile surface (flat, rough, structured, etc.)
- For lateral displacement of tiles and gap reduction between 0-19/16" (0 40 mm).
- Enables to equal the level of the tiles between 0-3/4" (0-20 mm).
- Maximum lifting capacity up to 100 Kg (220 lbs).

	REF.		ightharpoons		=
TILE GAP CLOSER	60926	18 7/8"	7.96 Lb	8.47 Lb	1























RUBIMIX E-10 ENERGY CAS

FREEDOM OF MOVEMENT.

For cementitious adhesives, resins, paints and other materials.













- · Brushless motor. Maintenance-free and increases the product's lifespan. Maximum efficiency.
- · Powered by a CAS Li-Ion 18V 5.2Ah battery pack, compatible with METABO cordless tools and all of those that form part of the CAS 18V platform.
- · Light and strong. Maximum reliability.
- · Dual bi-material grip handle. Better ergonomics, comfort and stability.
- Equipped with a 2-speed gearbox.
- Progressive switch (RPM control) to optimise the mixing of each material.
- · Switch safety lock prevents unintentional start-up.
- LED battery-charge indicator.
- Connection to mixing paddles with M14 thread and FAST-IN adapter (included).
- · Double-insulated motor.

	REF.		5	RPM		=	
RUBIMIX E-10 ENERGY CAS USA	26572	√	101/	18.0 / 20 / 28.0 70.0	18.9596 Lb	1	20
BATTERY RUBIMIX E-10 CAS 18V 5.2AH	85902		18V	1ª 0-420/ 2ª 0-700		1	

RUBIMIX-9 SUPERTORQUE

VERSATILE ELECTRIC MIXER, SUITABLE FOR CEMENTITIOUS ADHESIVES, RESINS, PAINTS AND OTHER MATERIALS.

Facilitates homogeneous mixing of the materials and prevents the creation of bubbles and/or lumps.















- · Electric mixer with high torque.
- · Electronic speed controller (rpm control) to OPTIMISE the mixing of each material.
- · Equipped with a mechanical 2 SPEED gearbox (450/780 rpm).
- · Better electrical SAFETY thanks to its double insulation.
- ATTRACTIVE and FUNCTIONAL Design.
- Connection to mixing paddles with M14 thread.
- Double handle with bi-material grip providing better ERGONOMICS, COMFORT and STABILITY.
- · Chassis in TECHNICAL, LIGHT, and STRONG plastic. Maximum RELIABILITY AND DURABILITY.
- · SAFETY on button. Prevents unintentional start-up.
- · Smooth start system.
- Direct access to the motor's brush housing for quick and easy maintenance.
- Includes mixing paddle with 3 helixes of 5 1/2" (140 mm) diameter for mortars and cementitious adhesives.
- Option to couple a Rubi fast-in adapter for paddles (NOT included).
- Includes brushes and 3/4" and 7/8" (19 and 22 mm) spanners.
- Compatible with chucks and range of mixing paddles RUBI.

	REF.	W	5	RPM	Ö	=	
RUBIMIX-9 SUPERTORQUE USA + CHUCK	26973	1800	120V-50/60Hz.	1ª 0-450 / 2ª 0-780	11.2 Lb	2	18






VERSATILITY BY CHANGING THE MIXING PADDLE.

For cementitious adhesives, resins, paints and other materials.



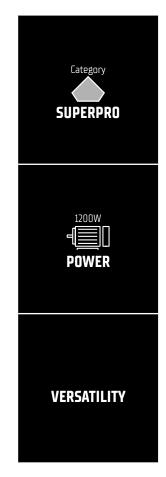









- \cdot Higher mixing performance, thanks to a more efficient torque.
- · 2 speed gearbox and Electronic speed controller (R.P.M. regulation) to optimize the mixing of each material.
- · Quick and easy to change the brushes. High comfort.
- · Safety lock to prevent unexpected start.
- Power: 1200 W.
- · Double insulation.
- Direct connection M14 thread.
- Electronic regulator (1st 0-650 r.p.m. / 2nd 0-850 r.p.m.). Ø maximum paddle: 5" 1/2 (140 mm).
- Ø 4 3/4" (120 mm.) mixing paddle included.

	REF.		W	5	RPM	Č		
RUBIMIX-9 N USA + CHUCK	24949	-	1200	110-130V 50-60 Hz.	1ª 0-650 / 2ª 0-850	12.3 Lb	2	24

RUBIMIX-8 EASY PRO

MULTIPURPOSE ELECTRIC MIXER, SUITABLE FOR CEMENTITIOUS ADHESIVES, RESINS, PAINT, AND OTHER MATERIALS. Facilitates a homogeneous mixing of materials, avoiding the formation of bubbles and/or lumps



- · 1400 W Electric Motor.
- · Mixing paddles connection through M14 thread.
- · Greater electrical SAFETY thanks to double isolation.
- · EASY and INTUITIVE use. ATTRACTIVE and FUNCTIONAL design.
- $\bullet \ \, \text{Ergonomic bi-material handle with improved grip that provides greater comfort \& stability}.$
- · chassis in technical plastic, light & resistant. maximum reliability & durability.
- Anti-ignition security system. Prevents inadvertent start-up.
- Includes Ø4" 3/4 (Ø120 mm) red triple helix split mixing paddle (M14 thread continuous full rod) for mortar and cementitious adhesives.
- Direct access to engines brushes for a fast and easymaintenance.
- · Spare brushes and 3/4"& 7/8" (19 & 22 mm) keys included.
- Compatible with drill holder and RUBI mixing paddles range.

	REF.	W	5	RPM	Ċ	<u></u>	
RUBIMIX-8 EASY PRO 120V 50/60 USA.	16906	1400	120V-50-60Hz.	1ª 0-700	13 Lb	2	18



MIXING PADDLES

ADAPTABLE TO RUBI MIXERS AND OTHER BRANDS.










MIXER PADDLES FAST-IN 3HELIX

- · To mix cement mortars.
- Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- · Less effort in mixing.
- Less vibrations. Greater comfort.
- · Fast connection without tools FAST-IN.
- Compatible with RUBIMIX E-10 ENERGY CAS, RUBIMIX-9 POWER MAX, RUBIMIX-16 ERGOMAX or FAST-IN (Ref. 76907) Adaptable to any mixer with M14x2 connection.

	REF.			<u></u>	=	
MIXER PADDLE M-120-FI 3H	76942	33-55 Lb	24"	4 3/4"	2	
MIXER PADDLE M-140-FI 3H	76943	55-88 Lb	24"	5 1/2"	2	84





MORTAR MIXER PADDLE THREAD M14 3 HELIX

- To mix cement mortars.
- Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- · Less effort in mixing.
- · Less vibrations. Greater comfort.
- M14 x 2 thread connection.
- Adaptable directly to RUBIMIX range and other brands.

	REF.		8	<u>\$</u>	
MORTAR MIXER PADDLE M-100-R 3H	25978	33-44 Lb	21 5/8"	4"	6
MORTAR MIXER PADDLE M-120-R 3H	25979	33-55 Lb	24"	4 3/4"	2
MORTAR MIXER PADDLE M-120-R 3H LONG	26953	33-55 Lb	24"	4 3/4"	2
MORTAR MIXER PADDLE M-140-R 3H	76919	55-88 Lb	24"	5 1/2"	2
MORTAR MIXER PADDLE M-160-R 3H	76940	66-132 Lb	24"	6"	2







ADAPTER FAST-IN THREAD

- · Adapter for use of the FAST-IN mixer paddles.
- Transforms threaded connection M14x2 to quick connection system FAST-IN.
- · Adaptable to any mixer with M14x2 thread.

	REF.	=
FAST-IN ADAPTER	76907	1





EGGBEATER

- $\boldsymbol{\cdot}$ To mix thinset, mortar, grout and other setting materials.
- Reduces the creation of bubbles.
- $\boldsymbol{\cdot}$ White zinc coating for rust protection.
- 27" hexagonal shaft.

	REF.		<u> </u>	=
EGGBEATER	76908	5"	27"	6





MORTAR MIXING PADDLE-HEXAGONAL ROD

- $\boldsymbol{\cdot}$ To mix thinset, mortar, grout and other setting materials.
- Reduces the creation of bubbles.White zinc coating for rust protection.
- 27" hexagonal shaft.

	REF.	8	<u>\$</u>		
MORTAR MIXING PADDLE-	74957	/s"	70"	77 /// lb	4
HEXAGONAL ROD	24957	4	20	33-44 Lb	0





DIAMOND DRILL BITS - WET CUT

· FOR WET DRILLING OF WALL TILES, FLOOR TILES, PORCELAIN AND OTHER MATERIALS.





















EASY GRES DRILL BITS

- Diamond drill bits to be used with electric drill without hammer.
- The quality of the diamond allows the drilling of ceramics, porcelain, granite, marble and glass.
- · Ideal to install bathroom accessories and any type of decorative accessories over ceramic surfaces.
- They must always be used with the EASY GRES guide which allows their adequate refrigeration ensuring a high accuracy and good results.
- Body made of steel and bit made of electrodeposited diamond.
- · Lateral opening to improve cooling of the drill bit and to allow the elimination of solid waste produced after the drilling of the hole.
- Recommended speed of use between 400 and 1000 r.p.m. depending of the material to be drilled.
- To achieve a better finish and a longer life of the drill bit, it's important to observe the adequate speed of use and to apply a moderate pressure during the drilling.
- · Supplied in blister.

	REF.	RPM			
EASY GRES DRILL BIT 7/32" (6 MM.)	04922	1000 max.	1"	10	4600
EASY GRES DRILL BIT 1/4" (6.5 MM.)	05913	1000 max.	1"	10	4600
EASY GRES DRILL BIT 5/16" (8 MM.)	04923	1000 max.	1"	10	4600
EASY GRES DRILL BIT 3/8" (10 MM.)	05914	1000 max.	1"	10	4600
EASY GRES DRILL BIT 1/2" (12 MM.)	04921	1000 max.	1"	10	4600
EASY GRES DRILL BIT 3/4" (20 MM.)	05941	500 max.	1 1/16"	1	
EASY GRES DRILL BIT 1 1/8" (28 MM.)	05942	500 max.	1 1/16"	1	
EASY GRES DRILL BIT 1 3/8" (35 MM.)	05943	500 max.	1 1/16"	1	
EASY GRES DRILL BIT 1 5/8" (40 MM.)	05944	500 max.	1 1/16"	1	
EASY GRES DRILL BIT 1 3/4" (43 MM.)	05965	500 max.	1 1/16"	1	
EASY GRES DRILL BIT 2" (50 MM.)	05966	500 max.	1 1/16"	1	
EASY GRES DRILL BIT 2 1/4" (55 MM.)	05967	500 max.	1 1/16"	1	
EASY GRES DRILL BIT 2 1/2" (65 MM.)	05969	500 max.	1 1/16"	1	
EASY GRES DRILL BIT 2 11/16" (68 MM.)	05978	500 max.	1 1/16"	1	
EASY GRES DRILL BIT 3" (75 MM.)	05979	500 max.	1 1/16"	1	
EASY GRES DRILL BIT 4" (100 MM.)	05981	500 max.	1 1/16"	1	
EASY GRES DRILL BIT 4 3/4" (120 MM.)	05982	500 max.	1 1/16"	1	



靣



















PELECTRIC DRILL WITHOUT PERCUSSION

EASY GRES DRILL BIT SETS 0 7/32" TO 1/2" (6 - 12 MM.)

- The EASY GRES guide allows holes both vertically and horizontally, thanks to its functional design incorporating a water tank with flow control valve.
- The EASY GRES guide attaches easily to any surface, thanks to its renewable adhesives.

	REF.	RPM			
EASY GRES DRILL BIT 7/32" (6 MM.) SET	04927	1000 max.	1"	10	800
EASY GRES DRILL BIT 5/16" (8 MM.) SET	04928	1000 max.	1"	10	800
EASY GRES DRILL BIT 3/8" (10 MM.) SET	04929	1000 max.	1"	10	800
EASY GRES DRILL BIT 1/4" AND 3/8" (6.5 AND 10 MM.) SET	04909	1000 max.	1"	10	800





PORCELAIN TILE

ELECTRIC DRILL WITHOUT PERCUSSION

KIT EASY GRES PLUS

- The kit includes:
- · MULTIDRILL guide.
- · Water tank and hose.
- EASY GRES drills Ø 3/4", 11/8", 13/8", 13/4", 2", 21/2" and 3" (20, 28, 35, 43, 50, 65 and 75 mm.) and case.

	REF.	RPM		=	
KIT EASY GRES PLUS	50937	500 max.	1 1/16"	1	48



O





EXTRA LONG LIFE

ELECTRIC DRILL WITHOUT PERCUSSION

FORAGRES DRILL BITS 0 13/16" TO 4 3/4" (20 - 120 MM.)

- To drill floor tiles, porcelain tiles, granite and marble.
- · Always use cooled with water and non-hammer electric drill.
- \cdot Ø 15/8" (40 mm.) drill bit, designed for housing of toilet flushing mechanisms. Supplied in blister.



	REF.	RPM		
FORAGRES DRILL BIT 3/4" (20 MM.)	04970	900 max.	1 3/16"	1
FORAGRES DRILL BIT 1 1/8" (28 MM.)	04971	900 max.	1 3/16"	1
FORAGRES DRILL BIT 1 3/8" (35 MM.)	04972	900 max.	1 3/16"	1
FORAGRES DRILL BIT 1 5/8" (40 MM.)	04963	900 max.	1 3/16"	1
FORAGRES DRILL BIT 2" (50 MM.)	04973	900 max.	1 3/16"	1
FORAGRES DRILL BIT 2 1/2" (65 MM.)	04974	900 max.	1 3/16"	1
FORAGRES DRILL BIT 2 11/16" (68 MM.)	04918	900 max.	1 3/16"	1
FORAGRES DRILL BIT 3" (75 MM.)	04975	900 max.	1 5/16"	1
FORAGRES DRILL BIT 4" (100 MM.)	04976	450 max.	1 3/16"	1
FORAGRES DRILL BIT 4 3/4" (120 MM.)	04977	450 max.	1 3/16"	1





ELECTRIC DRILL WITHOUT PERCUSSION PORCELAIN TILE EXTRA LONG LIFE SUPERPRO

KIT FORAGRES

- Kit includes:
- · MULTIDRILL Guide.
- · Tank and hose.
- Diamond drill bits Ø 3/4", 11/8", 13/8", 13/4", 2" and 2 11/16" (Ø 20, 28, 35, 43, 50, 68

	REF.	RPM		=
KIT FORAGRES	50903	900 max.	1 3/16"	1

DIAMOND DRILL BITS - DRY CUT

• FOR DRY DRILLING OF WALL TILES, FLOOR TILES AND PORCELAIN TILES.





















DRYGRES DRILL BITS

- For dry drilling in ceramic, porcelain, natural stone and other materials.
- · Maximum operating speed 14,000 r.p.m. M14 thread finish.
- They can be used both with grinders or drill without hammer, using the included
- · Usable with grinder. Supplied in blister.

	REF.	RPM		=
DRYGRES DRILL BIT 0 1/4" (6 MM.)	05993	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 5/16" (8 MM.)	05932	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 3/8" (10 MM.)	05901	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 3/4" (20 MM.)	05934	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 1 1/8" (28 MM.)	05902	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 1 3/8" (35 MM.)	05987	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 1 3/4" (43 MM.)	05936	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 2" (50 MM.)	05903	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 2 1/2" (65 MM.)	05937	14000 max.	1 7/16"	1
DRYGRES DRILL BIT 0 3" (75 MM.)	05938	14000 max.	1 7/16"	1























KIT DRYGRES

- They can be used both with grinders or drill without hammer, using the included adapter kit.
- The kit includes: MULTIDRILL guide with carry case. Ref.50917, Ref.50936, Ref.50996. Dry cutting diamond drill bits:
- Ø1 1/8"(28mm),1 3/8"(35mm),1 3/4"(43mm)& 2 11/16"(68mm).
- Ø1 1/8"(28mm),1 3/8"(35mm),1 3/4"(43mm),2"(50mm)&2 11/16"(68mm).
- Ø1/4"(6mm),5/16"(8mm),3/4"(20mm),1 3/8"(35mm),50 &2 11/16"(68mm).

	REF.	RPM		=
KIT 5 BITS DRYGRES	50936	14000 max.	1 7/16"	1



SUPERPRO	PORCELAIN TILE	LONG LIFE	CORDLESS POWER DRILL

DRYGRES DRILL BITS 4DRILL

- Specially designed for dry drilling in porcelain stoneware. Suitable for other ceramic materials, natural stone and artificial stone.
- With high resistant welding of the diamond grains for a longer duration.
- "Easy-Start" Without slipping. Suitable for work without a centering guide.
- Perfect for cordless drills (1000 2500 rpm).
- Reinforced body with grub screw for better performance and rigidity, thus maintaining the wax on the tip of the drill (no wax Ø28 & Ø35 mm models).
- · High quality finish.
- Designed to be used exclusively with either a cordless drill or an electric drill.
- Their hexagonal connection allows them to adapt quickly to drills with a 10 mm chuck

REF.	RPM		=
05951	1000 min.	1 7/16"	1
05952	1000 min.	1 7/16"	1
05953	1000 min.	1 7/16"	1
05954	1000 min.	1 9/16"	1
05956	1000 min.	1 9/16"	1
05957	1000 min.	1 9/16"	1
05970	2000 min.	1 9/16"	1
05971	2000 min.	1 9/16"	1
	05952 05953 05954 05956 05957 05970	05951 1000 min. 05952 1000 min. 05953 1000 min. 05954 1000 min. 05956 1000 min. 05957 1000 min. 05970 2000 min.	05951 1000 min. 17/16" 05952 1000 min. 17/16" 05953 1000 min. 17/16" 05954 1000 min. 19/16" 05956 1000 min. 19/16" 05957 1000 min. 19/16" 05970 2000 min. 19/16"



SUPERPRO	PORCELAIN TILE	LONG LIFE	CORDLESS POWER DRILL

KIT DRYGRES 4DRILL

- For dry drilling in porcelain stoneware. Suitable for other ceramic materials, natural stone and artificial stone.
- · Hexagonal connection, compatible with battery drills.
- · Kit composed of:
- DRYGRES 4DRILL diamond drills dry cut Ø 6, 8, 10 and 12 mm.
- · With case.

	REF.	RPM	=
KIT DRYGRES 4DRILL	05939	1000 min.	1





ACCESSORIES FOR DIAMOND DRILL BITS

GUIDANCE SYSTEMS, AND OTHER ACCESSORIES FOR DIAMOND DRILLS.







TANK FOR MULTIDRILL GUIDE

- Bottle of 1200 ml. volume, with manual pressure pump.
- Includes 3/32" (2 m). hose.

	REF.	=
TANK AND HOSE FOR MULTIDRILL GUIDE	50947	1





MULTIDRILL GUIDE

- By fixing with suction cup, allows horizontal and vertical holes in the right place, preventing the drill bit from slipping.
- Compatible with dry cutting diamond drill bits, removable diamond drill bits Ø 1/4" to 9/16" (6–14 mm.) and wet cutting diamond drill bits Ø 13/16" to 3" (20–75 mm.).

	REF.	L-W
MULTIDRILL GUIDE	51921	1



SUPERPRO

- · Chuck attachable to the entire RUBIMIX range to work with hexagonal and round finishing rods below 12mm. (1/2").
- · Includes chuck key Ref. 71969.

	REF.	-
СНИСК	71967	1





ELECTRIC DRILL ADAPTER

- For the use of dry cutting diamond drill bit with electric drill. (M14)
- Use without hammer.


	REF.	=
M14 ADAPTER FOR ELECTRIC DRILL	05976	1



TROWELS AND NOTCHED TROWELS

THE WIDE RANGE OF NOTCHED EDGES (SQUARED, TRIANGULAR, OR ROUNDED) IS ADAPTED TO ALL CERAMIC MATERIALS AND FORMATS AND DIFFERENT BONDING MATERIALS.
 NOTCHED EDGES AVAILABLE FROM 1/8" (3 X 3 MM.) TO 13/16" (20 X 20 MM.).



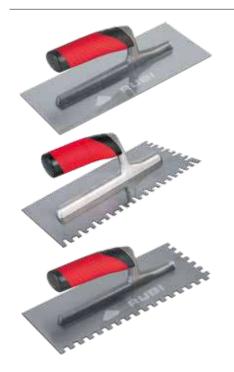



TROWELS & NOTCHED TROWELS OPEN RUBIFLEX HANDLE

- \cdot Steel plate special high wear resistance with corrosion protection by clear coat.(STEEL)
- Ergonomic RUBIFLEX handle with two textures.
- · Perfect flatness of the plate.

	REF.	ГГГ				
STEEL NOTCHED TROWEL 1/8"X1/8" (3X3 MM.)	76961	1/8"	1/8"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) 3/16"X3/16" [4.5X4.5 MM.]	76965	3/16"	3/16"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) 1/4"X1/4" (6X6 MM.)	76962	1/4"	1/4"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) 1/4"X13/32" (6X10 MM.)	76966	1/4"	3/8"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) 1/2"X1/2" [12X12 MM.]	76967	1/2"	1/2"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) R-13/32" (10 MM.)	76964	0"	0"	3/8"	6	270
STEEL NOTCHED TROWEL 28 CM. YW	72949	1/4 / 1/2"	5/16 / 1/4"	0"	6	270



SUPERPRO OPEN HANDLE RUBIFLEX

PRO STAINLESS STEEL

- Tile adhesive (thin-set) application.
- Aluminum structure. Light and resistant. Bi-material handle RUBIFLEX. Improves ergonomics. Stainless steel plate.
- Plate's fixation by 6 electro welded points. Irremovable and maximum mechanical resistance.

	REF.	
PRO STAINLESS STEEL 1/4" X 1/4" TROWEL	76952	6
PRO STAINLESS STEEL 5/16"X 5/16" TROWEL	76953	6
PRO STAINLESS STEEL 3/8" X 3/8" TROWEL	76954	6
PRO STAINLESS STEEL 1/2" X 1/2" TROWEL	76955	6





CLOSED HANDLE

WOODEN

19"(48CM) TROWELS & NOTCHED T. CLOSED WOOD HANDLE

- Steel plate special high wear resistance, corrosion-protected by clear coat (STEEL).
- Stainless steel plate special high wear resistance (INOX)
- Perfect flatness of the plate.
- \cdot The notches 13/16" x 13/16" (20 x 20 mm.) developed for dosing of glue mortar on uneven floors. Allows more material thickness.

	REF.	ГГГ			<u></u>	
STEEL TROWEL 19" (48 CM.)	65988	0"	0"	0"	6	360
STEEL NOTCHED TROWEL 19" (48 CM.) 1/4" X 1/4" (6 X 6 MM.)	65958	1/4"	1/4"	0"	6	360
STEEL NOTCHED TROWEL 19" (48 CM.) 3/8" X 3/8" (8 X 8 MM.)	65959	5/16"	5/16"	0"	6	360
STEEL NOTCHED TROWEL 19" (48 CM.) 13/32" X 13/32" (10 X 10 MM.)	65983	3/8"	3/8"	0"	6	360
STEEL NOTCHED TROWEL 19" (48 CM.) 1/2" X 1/2" (12 X 12 MM.)	73973	1/2"	1/2"	0"	6	360
STEEL NOTCHED TROWEL 19" (48 CM.) 13/16" X 13/16" (20 X 20 MM.)	75962	13/16"	13/16"	0"	6	360





16" NOTCHED TROWELS

- · Double stainless steel for corrosion resistance.
- · Spread more adhesive with each pass.
- Ideal for tile with an edge 15" and large.

	REF.	Lr <u>i</u>				
16" NOTCHED TROWEL 16" 1/2"X1/2"X1/2"	26976	1/2"	1/2"	1/2"	6	360
16" NOTCHED TROWEL 16" 1/4"X1/2"X1/4"	26977		1/4"	1/4"	6	360
16" NOTCHED TROWEL 16" 1/4"X3/8"X1/4"	26978	1/4"	1/4"	0"	6	360
16" NOTCHED TROWEL 16" 1/4"X1/4"X1/4"	26979	1/4"	1/4"	0"	6	360





TECH-FLEX NOTCHED TROWELS

- Open RUBIFLEX handle for ergonomics.
- The trowel can be left resting on the edge of the carrycot.
- The curved and toothed plate is made of rubber for lightness and safety because it does not cut like metal films.
- •The curved shape of the plate is comfort engineered because it reduces operator effort and reduces adhesive loss during application.

enort and reduces admestive loss during application.		
	REF.	<u> </u>
TECH-FLEX NOTCHED TROWELS 1/4" X 3/8" (6X8) MRA	66972	-
TECH-FLEX NOTCHED TROWELS 3/8"X 13/32" [8X10] MRA	66973	-
TECH-FLEX NOTCHED TROWELS 13/32" X 1/2" [10X12] MRA	66974	-





BRICK TROWELS





PFP05

• Ergonomic RUBIFLEX.

	REF.	18	X,		<u>-</u>
PFP05-180 MM. (7 1/16")	75418	7"	4 1/8"	0.628 Lb	6
PFP05-200 MM. (7 7/8")	75420	8"	4 5/16"	0.703 Lb	6



PFP19

· Ergonomic RUBIFLEX.

	REF.	18	K	Ċ	=
PFP19- 80 MM. (4 5/16")	76808	4 5/16"	3"	0.335 Lb	6
PFP19- 90 MM. (5 1/16")	76809	5 1/16"	3 9/16"	0.37 Lb	6



PFP33

· Ergonomic RUBIFLEX handle.

	REF.	18	X.	Ö	=
PFP33-170X50 MM. (6 11/16" X 1 15/16")	79050	6 11/16"	1 15/16"	0.34 Lb	6

SCRAPERS





PRO HEAVY DUTY SCRAPER 5"

- To remove old coverings (ceramic tiles, wallpaper, vinyl tiles, carpets, paint, etc..)
- · Ideal for repair jobs (substitution of broken tiles) and renovations.



PRO HEAVY DUTY SCRAPER 5"	66953	1
5 BLADES FOR PRO HEAVY DUTY SCRAPER 5"	66954	1



JOINT SCRAPER

- Ergonomic handle with two electroplated tungsten carbide plates with high resistance to abrasion.
- $\boldsymbol{\cdot}$ Useable with 1, 2 or 3 plates depending on width of the joint.
- · Supplied in blister.

	REF.	=	
JOINT SCRAPER	65907	5	600
SPARE JOINT SCRAPER	71974	10	4600



RUBBER MALLET - FLAT/SPHERICAL SIDES

 $\boldsymbol{\cdot}$ Allows to strike at any angle. One flat surface and the other spherical.



	REF.	=	
WHITE RUBBER MALLET 17.6 OZ. (500 GR.)	66906	6	336



RUBISCRAPER-250

ELECTRIC GROUT SCRAPER

For grout removal without damaging the tile.





















- · Ergonomic design and bi-material finishing, for greater comfort and better stability.
- · Light and resistant. Maximum reliability.
- · Blades made in tungsten carbide. Resharpenable for a greater performance. Patented model.
- · Fast locking / unlocking system for easy assembly of blade.
- · deal for repair work (replacement of broken tiles).
- Equipped with 3 speeds. V1: 6500 i.p. / V2: 8000 i.p. / V3: 9500 i.p.
- Power: 250 W.
- · Stroke length: 3/32" (2 mm).
- Double insulation.
- Blades for joints of 1/16" (1.5 mm) (ref. 66810, use only with speed 1) and 1/8" (3 mm) (ref. 66812) included.
- Includes 2 special blades (st eel made) Ref. 66243 & 66244 to remove rests of thin-set from the back of the tiles or on the substrate.
- · Transpot Case Included
- Interchangeable blades for 1/16"(1.5mm), 3/32" (2mm), 1/8" (3mm) and 3/16" (4 mm) joints.

	REF.	5	W	=
RUBISCRAPER-250 USA	66942	120V-60Hz	250	1
1.5 MM (1/16") BLADE	66810			1
3 MM (1/8") BLADE	66812			1







NIPPERS FOR PORCELAIN TILES

- Specially for cutting narrow strips of a maximum of 7/16" (1cm).
- · Replaceable scoring wheels (Ref:01953).
- Equipped with tungsten carbide scoring wheels with titanium surface treatment to last longer. With a gentle turn, the scoring wheels can be repositioned when they start getting worn.

	REF.	=	
NIPPERS FOR PORCELAIN TILES	83942	5	765

SUPERPRO



NIPPERS FOR CERAMIC TILES

- · Tungsten carbide edge of great hardness.
- · To rectify cuts of ceramics.

	REF.	=
NIPPERS FOR CERAMIC TILES	65926	6

SUPERPRO



SHAPE TEMPLATE

• Copies the shape of the areas which are awkward to mark onto tiles, for subsequent cutting. Maximum depth 13/4" (4.5 cm).

	REF.	=
SHAPE TEMPLATE	70925	10

SUPERPRO



RULE SUPPORT SET

- · For easy adjustment and levelling of the rule for wall tiling.
- In box of 2 units.

	REF.	=	
RULE SUPPORT SET 20" (50 CM.)	60998	1	



LATEX GLOVES

- · Ideal for wet or abrasives tasks.
- For minimal risks only.
- · Made of 100% latex.
- · Conforms to EN420.

	REF.	=	
LATEX GLOVES	20907	12	3240

SUPERPRO



CAULK GUN 9 INCH

- · Dripless heavy duty 10 Oz. caulk gun.
- · Thrust Ratio (12:1).

	REF.	=
CAULK GUN 9 INCH	66992	6







In Change Day Con Con

MANUAL GROUT MORTAR APPLICATOR


- · Great capacity (650 cc) grout mortat applicator.
- · Very light structure made of aluminum.
- It allows an easy, quick and clean application.
- · Reduce consumption of grout and after grouting residue.
- · Pressure adjustable with trigger.
- Replaceable and adjustable nozzles to the joint width.
- Also usable for the application of silicone and PU rigid and flexible cartridges.
- Quick and clean application.

	REF.	=
MANUAL GROUT MORTAR APPLICATOR 650 CC.	65990	1



RUBILEVEL ANTISHOCK

- · Levels manufacturated in reliable, resistant aluminum.
- Double machining to ensure a constant precision in the top face and the base.
- · Accuracy: 1/50" (0,5 mm/m).
- $\boldsymbol{\cdot}$ Three bubbles for checking horizontal, vertical and and 45° levels.
- Double and ergonomic bi-material handle.
- · Rubber protector at the ends.
- DUAL view vertical vial for front measurements. Eliminates parallax error.
- MAGNIFIED horizontal vial for the CLEAREST view of the bubble.





FOLDING 4-IN-1 WORKING TABLE

- 4 uses in 1: Work bench, scaffold, dolly and creeper.
- Foldable, easy to transport and storage.
- Double sided board: MDF wood side (work bench function) and non-slippery PP plastic side (rest of functions). EASY interchangeable.
- Reinforced stainless steel area for harder jobs. Avoids damages on wooden surface.
- Angle conveyor and rule printed on the wooden side. Also includes a hole for small drillings (max. 25 mm) and hand tools insterts on metal frame.
- Folded table: 31 1/2"x20 1/2"x5" (80x52x12,5cm).
- Unfolded table: 45 1/4"x20 1/2"x31 1/2" (115x52x80cm).

	REF.	=	
FOLDING 4-IN-1 WORKING TABLE	66924	1	16





FLOATS FOR PLASTER





PLASTER FLOATS

• Flexible polyethylene and nonstick base.

	REF.	
PLASTIC HANDLE FLOAT 12" X 5" (30 X 14 CM.)	71904	6

RUBBER GROUT FLOATS







REPLACEABLE GROUT FLOAT PRO

- · Grout Float (Ref.26906) with sheet resistant to abrasion.
- · Replaceable with spare (ref. 84925).

	REF.	=
SPARE GROUT FLOAT PRO	26906	6
REPLACEABLE GROUT FLOAT PRO	84925	15

PRO



GROUT FLOATS PRO

- · Black foam rubber.
- Grout Float PRO 9"x4" 22.5x10cm. (Ref.84926), with white rubber sheet wear resistant.

	REF.	=	
RUBBER GROUT FLOAT 9"X4"X19/32" [22,5X10X1,5CM]	84926	6	384





GROUT FLOATS SUPERPRO PLASTIC

- · Plastic ergonomic handle.
- Available in different hardnesses of rubber for best finish as the joint width.
- Rubber float trowel, with white rubber sheet wear resistant.
- · Solid rubber float, with hard rubber abrasion resistant. Thermoflex float, medium hardness.

	REF.	=	
RUBBER GROUT FLOAT SUPERPRO	65971	6	540
THERMOFLEX RUBBER GROUT FLOAT SUPERPRO	65973	6	540
SOLID RUBBER GROUT FLOAT SUPERPRO	65972	6	540



TILE SPACERS & WEDGES

 TILE SPACERS, "T" SPACERS AND WEDGES FOR THE CORRECT PLACEMENT OF TILES. QUALITY BASE MATERIAL.



SUPERPRO





- For wall & floor tiles with minimum joint.
- · Quality base material, without impurities or imperfections.

	REF.	=	
TILE SPACERS 1/32" (1 MM.) - (B-300 U.)	26998	10	1200

SUPERPRO





TILE SPACER 1/16" (1.5MM)

- For wall & floor tiles with minimum joint.
- Quality base material, without impurities or imperfections.

	REF.	=	
TILE SPACERS 1/16" (1.5 MM.) - (B-300 U.)	26991	10	960
TILE SPACERS 1/16" (1.5 MM.) - (1000 PC.) JAR	02280	1	

SUPERPRO





- For wall & floor tiles with minimum joint.
- · Quality base material, without impurities or imperfections.

	REF.	<u>_</u>	
TILE SPACERS 3/32" (2 MM.) - (B-300 U.)	26997	10	1680

SUPERPRO





TILE SPACERS 1/8" (3MM)

- For floor tiles with thin joint.
- · Quality base material, without impurities or imperfections.

	REF.	=	
TILE SPACERS 1/8" (3 MM.) - (B-200 U.)	26990	10	1200
TILE SPACERS 1/8" (3 MM.) - (1000 PC.) JAR	02281	1	

SUPERPRO





TILE SPACERS 3/16" (5MM)

- · For floor tiles.
- · Quality base material, without impurities or imperfections.
- · Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.	<u>-</u>	
TILE SPACERS 3/16" (5 MM.) - (B-100 U.)	26989	10	960
TILE SPACERS 3/16" (5 MM.) - (400 PC. JAR)	02282	1	

SUPERPRO







TILE SPACERS 1/4" (6MM)

- · For floor tiles.
- Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.	=	
TILE SPACERS 1/4" (6 MM.) - (B-100 U.)	02036	10	540







T-SPACERS 1/32" (1MM)

- · Ideal for "brick style" tiling and perimeters.
- Quality base material, without impurities or imperfections.

	REF.	-
T-SPACERS 1/32" (1MM) (B-300 UN.)	02859	10





T-SPACERS 1/16" (1.5MM)

- · Ideal for "brick style" tiling and perimeters.
- · Quality base material, without impurities or imperfections.

	REF.	- W
T-SPACERS 1/16" (1.5MM) (B-300 UN.)	26988	10
T FOR GROUTS 1/16" (1.5MM) (JAR-1000 UN.) USA	02715	1

AD

△






T-SPACERS 1/8" (3MM)

- · Ideal for "brick style" tiling and perimeters.
- Quality base material, without impurities or imperfections.

	REF.	=	
T-SPACERS 1/8" (3 MM.) - (B-200 U.)	26986	10	1680
T-SPACERS 1/8" (3 MM.) - (JAR-1000 U.)	02399	1	

SUPERPRO



- Ideal for "brick style" tiling and perimeters.
- Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.		
T-SPACERS 3/16" (5 MM.) -(B-100 U.)	26987	10	2040
"T" SPACERS 3/16" - (JAR-400 U.)	02398	1	



XX









WEDGES

- · Wedges for tiling.
- · Quality base material, without impurities or imperfections.

	REF.	=	
WEDGES 3/16" (5 MM.)-(B-500 U.)	02950	10	1500
WEDGES 3/16" (5MM.)-(JAR-500 PCS.)	02283	1	

SUPERPRO



HORSESHOE SPACERS

- $\boldsymbol{\cdot}$ For Rectify the position of the pieces during installation.
- Thanks to their geometry, horseshoe shaped, these spacers can be combined together to give the same function as a traditional crosshead or "T".

	REF.	- -
SPACER HORSESHOE 1/16" (300 UN) JAR	13841	10
SPACER HORSESHOE 1/8" (250 UN) JAR	13840	1



DELTA LEVEL SYSTEM: LEVELLING SYSTEM

SYSTEM TO FACILITATE THE LAYING AVOID LIPPAGE AND IMPROVING FINISHING.





KIT DELTA LEVEL SYSTEM

- \cdot The kit consists of 1 pliers, 100 clips and 100 reusable wedges.
- · Packaged in a handy bucket.

	REF.	=	
KIT DELTA LEVEL SYSTEM 1/32" 1MM (3-12MM)	03913	1	80
KIT DELTA LEVEL SYSTEM 1/16" 1,5MM (3-12MM)	03914	1	80













DELTA LEVEL SYSTEM STRIP

- · Made in PP.
- Different models available:
- \cdot Clip 1/32" (1 mm) 1/16" (1.5 mm) and 3/32" (2 mm). for tiles from 1/8" (3mm) to 1/2" (12 mm) thick.
- \cdot 1/8" (3 mm) and 3/16" (5 mm) clip for tiles from 1/4" (6 mm) to 9/16"(15 mm) thick.
- \cdot 1/16" (1.5mm) and 3/16" (5mm) also available in taller clips up to 7/8".

	REF.	<u></u>	
200 CLIPS 1/32" DELTA LEV. SYS [1/8"-1/2"]	02851	21	168
400 CLIPS 1/32" DELTA LEV. SYS [1/8"-1/2"]	02839	13	104
240 CLIPS 1/32" DELTA LEV. SYS [1/8"-1/2"]	02870	1	16
200 CLIPS 1/16" DELTA LEV. SYS [1/8"-1/2"]	03937	21	168
400 CLIPS 1/16" DELTA LEV. SYS	03938	13	104
2400 CLIPS 1/16" DELTA LEV. SYS [1/8"-1/2"]	03939	1	16
200 CLIPS 3/32" DELTA LEV. SYS [1/8"-1/2"]	02853	24	192
400 CLIPS 3/32" DELTA LEV. SYS [1/8"-1/2"]	02854	13	104
2400 CLIPS 3/32" DELTA LEV. SYS [1/8"-1/2"]	02856	1	16
200 CLIPS 1/8" DELTA LEV. SYS [1/4"-9/16"]	03941	21	168
400 CLIPS 1/8" DELTA LEV. SYS [1/4"-9/16"]	03942	11	88
2400 CLIPS 1/8" DELTA LEV. SYS [1/4"-9/16"]	03943	1	16
200 CLIPS 3/16" DELTA LEV. SYS [1/4"-9/16"]	06827	21	168
400 CLIPS 3/16" DELTA LEV. SYS [1/4"-9/16"]	06828	11	88
2400 CLIPS 3/16" DELTA LEV. SYS [1/4"-9/16"]	06829	1	16
100 CLIPS 1/16" DELTA LEV. SYS [7/16"-7/8"]	02846	20	320
100 CLIPS 3/16" DELTA LEV. SYS [1/2"-7/8"]	06981	20	240







DELTA LEVEL SYSTEM PLIERS FAST-FIX

- FAST-FIX regulation system. Without screws, faster and intuitive.
- · Made of steel with bi-material soft-grip handles for greater ergonomics.
- Protective cover on the pressure cam to avoid damaging the tile.

	REF.	<u> </u>
DELTA LEVEL SYSTEM PLIERS FAST-FIX	03901	6






- Prevents the generation of lippage during ceramic tile installation, both in flooring and on walls.
- \cdot Recommended for formats of 11 " 13/16x 11 " 13/16 (30x30 cm) and above, always with back buttering.

	REF.	=	
DELTA LEVEL SYSTEM WEDGE N (B-100 UN)	03948	12	192
DELTA LEVEL SYSTEM WEDGE N (B-200 UN)	03949	13	104
DELTA LEVEL SYSTEM WEDGE N (B-400 UN)	03950	6	48
DELTA LEVEL SYSTEM WEDGE N (C-1200 UN)	03951	1	16









 $\boldsymbol{\cdot}$ For Delta System wedges or Cyclone system threads. Reusable.

	KEF.	≫'⊡
LEVELLING CERAMIC PROTECTOR (B-100 UN)	16902	100
	`	



CYCLONE LEVEL SYSTEM: LEVELLING SYSTEM

· SYSTEM TO FACILITATE THE LAYING AVOID LIPPAGE AND IMPROVING FINISHING.



<>.⊢





CYCLONE KIT

- The kit consists of 300 clips and 100 reusable caps.
- · Packaged in a practical bucket.

	REF.	=	H
KIT CYCLONE 1,5 MM	35964	1	40
KIT CYCLONE 3 MM	35965	1	40





PATENT

CYCLONE CAPS

- Reusable, special 1/4" (6 mm) external thread.
- Eccentric detail for better force concentration.
- \cdot Crowned area for better grip. Dimensions: 2 " 5/16 x 2 " 5/16 x 1 " 1/2 (5 9x59x38 mm).
- Supplied in reusable container.

	REF.	=	
CYCLONE CAPS (B-100)	35949	5	50
CYCLONE CAPS (B-300)	35950	4	24
CYCLONE CAPS (B-1200)	35951	1	12



SUPERPRO



CYCLONE FLAT BASE

- · Available in various models:
- Flat base clips of 1mm (1/32"), 1.5mm (1/16"), 2mm (3/32") and 3mm (1/8"), 5mm (3/16").
- · Visual thickness identification by colour.

	REF.	=	
CYCLONE L.S. 1/32" 1 MM FLAT BASE (B-100)	35937	36	12
CYCLONE L.S. 1/32" 1 MM FLAT BASE (B-300)	35938	12	12
CYCLONE L.S. 1/32" 1 MM FLAT BASE (B-2400)	35939	1	20
CYCLONE L.S. 1/16" 1,5 MM FLAT BASE (B-100)	35940	36	12
CYCLONE L.S. 1/16" 1,5 MM FLAT BASE (B-300)	35941	12	12
CYCLONE L.S. 1/16" 1,5 MM FLAT BASE (B-2400)	35942	1	20
CYCLONE L.S. 3/32" 2 MM FLAT BASE (B-100)	35943	36	12
CYCLONE L.S. 3/32" 2 MM FLAT BASE (B-300)	35944	12	12
CYCLONE L.S. 3/32" 2 MM FLAT BASE (C-2400)	35945	1	20
CYCLONE L.S. 1/8" 3 MM FLAT BASE (B-100)	35946	36	12
CYCLONE L.S. 1/8" 3 MM FLAT BASE (B-300)	35947	12	12
CYCLONE L.S. 1/8" 3 MM FLAT BASE (C-2400)	35948	1	20
CYCLONE L.S. 3/16" 5 MM FLAT BASE (B-100)	35900	36	12
CYCLONE L.S. 3/16" 5 MM FLAT BASE (B-300)	35901	12	12
CYCLONE L.S. 3/16" 5 MM FLAT BASE (C-100)	35902	1	20

SUPERPRO



CYCLONE CROSS BASE

- · Available in various models:
- Cross base clips of 1.5 mm (1/16") and 3 mm (1/8"). Visual thickness identification by colour.

	REF.	=	
CYCLONE L.S. 1/16" 1,5 MM CROSS BASE (B-100)	35952	36	12
CYCLONE L.S. 1/16" 1,5 MM CROSS BASE (B-300)	35953	12	12
CYCLONE L.S. 1/8" 3 MM CROSS BASE (B-100)	35955	36	12
CYCLONE L.S. 1/8" 3 MM CROSS BASE (B-300)	35956	12	12

SUPERPRO



CYCLONE CROSS T BASE

- · Available in various models:
- \cdot Cross base clips of 1.5 mm (1/16") and 3 mm (1/8") . Visual thickness identification by colour.

	REF.	<u>-</u>	
CYCLONE L.S. 1/16" 1,5 MM CROSS T BASE (B-300)	35959	12	12
CYCLONE L.S. 1/8" 3 MM CROSS T BASE (B-300)	35962	12	12

SUPERPRO



LEVELLING CERAMIC PROTECTOR

- To protect the tiles against scratching or abrasive damage caused by friction between wedges, caps and delicate tiles, particularly in the presence of sand or hard particles.
- For Delta System wedges or Cyclone system threads. Reusable.

	REF.		$\stackrel{\circ}{\Box}$
LEVELLING CERAMIC PROTECTOR (B-400 UN)	16902	100	10.8 Lb



PLASTIC TUBS "FLEXTUB"

· THE HIGH QUALITY PLASTIC TUBS ARE SUITABLE FOR USE IN VARIOUS INDUSTRIES, COMBINE OPTIMAL RESISTANCE WITH GOOD FLEXIBILITY AND ARE VERY LIGHTWEIGHT. THEIR SHAPE AND THE DESIGN OF THEIR HANDLES MEANS THAT ANY OF THE PLASTIC TUBS IN THIS RANGE CAN BE CARRIED IN ONE HAND WITH NO RISK OF BREAKAGE OR FATIGUE.





- THE COMMON CHARACTERISTICS OF ALL THE PLASTIC BASKETS ARE:
- MADE WITH HIGH QUALITY POLYETHYLENE, GREATER ROBUSTNESS.
- \cdot suitable for all types of work in the construction industry as well as other industries.
- VERY THICK WALLS FOR MAXIMUM STRENGTH AND RESISTANCE.





PLASTIC TUB №. 3 "FLEXTUB" (10.5 GAL.)

- · Greater comfort during transport. For easy waste collection.
- · Reinforced handles. Greater resistance.
- · Lightweight.













PLASTIC TUB №. 3 "FLEXTUB" (10.5 GAL.)

300

88773

PRO



PLASTIC TUB №. 4 "FLEXTUB" (14.5 GAL.)

- · Greater comfort during transport. For easy waste collection.
- · Lightweight.





















PLASTIC TUB BLACK COLOR №. 4 (55 L.)

REF.

20 7/8"

14.5 gal.

200

KNEE PADS, ERGONOMIC SEAT AND CUSHION







A HIGH LOAD CAPACITY

HARD SURFACES

SR-1 ERGONOMIC SEAT

- · Aluminum chassis high strength and stability.
- · Allows an ergonomic position of comfort.
- · Prevents injuries in knees and back.
- · Adjustable seat height and angle for optimum adaptation to each use.
- · Robust construction with 7 heavy duty wheels.
- · Includes trav for tools and accessories.
- · Ideal for flooring, parquet installation, cleaning and other operations on pavements tasks. Replaceable ergonomic kneepads.
- · Maximum weight: 286 lb (130 kg).

	REF.		
SR-1 ERGONOMIC SEAT	81999	1	18





ALL TERRAIN 4X4





- Ideal for much more comfortable installation of tiles and flooring in general in different phases of the installation: substrate preparation, installation, grouting and cleaning.
- · LARGE SUPPORT surface area for optimal STABILITY and COMFORT.
- $\boldsymbol{\cdot}$ Double strap for keeping the knee pad tightly fitted to the leg at all times.
- · Avoids blocking of blood flow at the back of the knee.
- · Quick strap fastening.
- In accordance with EN14404. Performance level: 1.

	REF.	=	
SET OF PROFESSIONAL KNEE PADS N	66957	6	192





GEL COMFORT KNEE PADS

- Ergonomic design professional and high comfort knee pads.
- Its design combines the use of hard materials against impacts and uneven floors and soft materials therein, adapted to the user's anatomy.
- In addition to protecting the user's knees through the use of silicone gel inside, its studied ergonomics provide them with great stability, preventing ligaments and tendons fatigue.
- They incorporate two bands Neoprene closure.
- · Conforms to EN14404. Protection level: 1.

	REF.	=	
GEL COMFORT KNEE PADS	81998	6	96



○ PREMIUM HARD SURFACES

GEL DUPLEX KNEE PADS

- Professional knee pads with ergonomic design. Highly comfortable.
- Their design combines the use of hard materials to protect against impacts and uneven floors and soft materials adaptable to the user's anatomy on the inside.
- Besides protecting the user's knees thanks to the silicone gel in their inside, their studied ergonomics gives them great stability, preventing ligaments and tendons fatigue.
- Wide range of uses thanks to their design " two in one ":
- Can be used together with the external rubber protection of great stability and resistance
- With the main body only, less bulky, which allows the knee to slide without problem over smooth surfaces.
- They incorporate a double fastener, inferior and superior, easy adjustable.
- · Conforms to EN14404.
- Protection level: 1.

	REF.	=	
GEL DUPLEX KNEE PADS	81989	6	96



SPONGES, FLOATS AND PADS







SPONGE FLOAT PRO

- Polyurethane foam floats with high absorption.
- The PLUS model has slits for increased performance drag dirt.

	REF.		\Diamond			
SPONGE FLOAT PRO PLUS	24988	11 1/16x5 1/2x1 3/16"	3	3	10	240





- · Floats with SUPERPRO sponge for grout cleaning and finishing.
- PLUS model has cuts for increased performance in wiping away dirt.





SUPERPRO



REPLACEABLE SUPERPRO SPONGES 12" X 5 11/32" (30X13,5CM)

- Float sponges for cleaning and finishing tile and grout jobs. Interchangeable sponges adaptable to the ergonomic handle. (Ref. 22912) and secure attachement to other brands.
- Sponges available with different levels of absorption and resistance to abrasion. Comfortable and secure attachement system.
- PLUS models have cuts for increased drag on the dirt.

	REF.			\Diamond	=	
FLOAT WITH REPLACEABLE SUPERPRO SPONGE	22900	12x5 5/16x1 9/16"	1	2	10	180
FLOAT WITH REPLACEABLE SWEEPEX SUPERPRO SPONGE	22916	12x5 5/16x1 9/16"	3	3	10	180
REPLACEABLE SUPERPRO SPONGE	22910	12x5 5/16x1 9/16"	1	2	10	320
REPLACEABLE SUPERPRO SPONGE PLUS	22918	12x5 5/16x1 9/16"	1	2	10	320
REPLACEABLE EPOXY CELLULOSE SUPERPRO SPONGE	22932	12x5 5/16x1 3/16"	4	4	10	
REPLACEABLE SWEEPEX SUPERPRO SPONGE	22922	12x5 5/16x1 3/16"	3	3	10	320
REPLACEABLE SWEEPEX SUPERPRO SPONGE PLUS	22914	12x5 5/16x1 9/16"	3	3	10	320

SUPERPRO

FLOAT WITH 10" (25 CM.) SUPERPRO PADS


- To clean ceramic surfaces and other materials.
- Float with three different roughness replaceable pads; soft (red), medium (blue) and hard (brown).
- · Float with three very stuff pads (white).
- 3 sets of pads: very soft (white), soft (red), medium (blue) and hard (brown).
- · Available set of 3 pads of different roughness: soft (red), medium (blue) and hard (brown).



	REF.		
FLOAT + 3 MIXED PADS	20900	10x4x1"	1
3 PADS REPLACEMENT SET - MEDIUM	20973	10x4x1"	1
3 PADS REPLACEMENT SET - HARD	20974	10x4x1"	1
3 PADS REPLACEMENT SET - SOFT/MEDIUM/HARD	20902	10x4x1"	1



SUPERPRO



SUPERPRO SPONGES

- PLUS models have cuts for increased drag on the dirt.
- Ref. 20905 available in Palbox.

	REF.			\Diamond	=	
SUPERPRO SPONGE	20905	8x5 1/8x2 3/4"	1	2	24	384
MIXED SUPERPRO SPONGE	20906	8x5 1/8x2 3/4"	4	2	24	288
EPOXY CELLULOSE SUPERPRO SPONGE	22928	6 11/16x4x1 9/16"	4	4	12	792
STANDARD PRO SPONGE	24966	6 11/16x4x2 3/4"	2	1	24	720



HIDRO ROUNDED SPONGES

- Convenient box with 2 bags x 30 Hidro Rounded Sponge vacuum packaged. Not individually packed.
- · Polyurethane sponges.
- HIDRO models are highly absorbent.
- Extra large all purpose sponge.

	REF.	=
HIDRO ROUNDED SPONGE VACUUM PACKAGED (60UN)	68999	60



HIDRO ROUNDED SPONGES

- · Mixed Rounded Sponge vacuum packaged 30 units, not individually packed.
- · Polyurethane sponges.
- · Mixed models: heavy duty grouting and haze buffer sponges.

	REF.	=
MIXED ROUNDED SPONGE VACUUM PACKAGED (30UN)	68997	60

WASHBOYS





RUBICLEAN TRIPLE SUPERPRO

- Plastic washboy, lightweight and high resistance.
- Equipped with 3 spiral rollers for further draining.
- Includes wheels and carrying handle.
- Capacity: 5.3 gl. (24 l.)
- · Useful capacity: 2.2 gl. (10 l.)
- Dimensions: 20 7/8" x 11 1/32" x 14 9/16" (53 x 28 x 37 cm).
- Supplied assembled and in 1 unit box.

	REF.	=	
RUBICLEAN TRIPLE SUPERPRO WASHBOY	21995	1	18



RUBICLEAN TRIPLE SUPERPRO

- Composed by:
- Rubiclean Eco (Ref. 24948), Sponge standard (Ref. 24966), Rubber Trowel for Joints (Ref. 24969) and High absorption sponge plus with handle (Ref. 84927).
- · Capacity: 5.2 gl. (20 l.)

	REF.	=
RUBICLEAN ECO KIT	68910	1



DISPLAYS

 VARIOUS DISPLAY UNITS TO SHOW RUBI PRODUCTS, OPTIMIZING SPACE AVAILABLE AND HELPING TO PROMOTE SALES.



HIDRO ROUNDED SPONGE-DISPLAY

- Sponges provides individually packed and with cardboard display. Polyurethane sponges.
- HIDRO models are highly absorbent.
- Extra large all purpose sponge.

	REF.	=
XL HIDRO ROUND SPONGE-DISPLAY (22 1/2"X 20 3/16"X 23 5/8")	68995	120

• Display will be sent unassembled.



MIXED ROUNDED SPONGE-DISPLAY

Sponges provides individually packed and with cardboard display. Polyurethane sponges.

• Mixed models: heavy duty grouting and haze buffer sponges.

	REF.	
MIXED ROUND SPONGE-DISPLAY [22 1/2"X 20 3/16"X 23 5/8"]	68996	120

· Display will be sent unassembled.





SUPERPRO SPONGE

- Contains x135 units of ref. 20905.
- Dimensions: 23" x 15" x 47" (60 x 40 x 120 cm).

	REF.	=	
SUPERPRO SPONGE PALBOX	69955	1	4





CARDBOARD GENERAL DISPLAY.

- Cardboard general display.
- Dimensions: 55 1/8 (1.40 m) high, 16 1/8 (41 cm) wide, 12 5/8 (32 cm) deep.

	REF.	=
CARDBOARD GENERAL DISPLAY1000MM	91905	1



GENERAL DISPLAY STAND

 $\boldsymbol{\cdot}$ Trays and shelves are optional.

	REF.	=
GENERAL DISPLAY 40" X 89" (100CM X 225CM)	93911	1
GENERAL DISPLAY 25" X 89" (65CM X 225CM)	93910	1
GENERAL DISPLAY 40" X 89" (100CM X 40CM) SHELF	90570	1
GENERAL DISPLAY 25" X 89" (65CM X 40CM) SHELF	90571	1
SHORT HOOK FOR GENERAL DISPLAY	90681	1
SET 2 DISPLAY BARS	90810	1
PRICE HOLDER HOOK	90656	1
PRICE HOLDER HOOK LABEL	90709	1
	·	





MANUAL CUTTERS RACK (1 FACE)

- Metal display stand with the capacity to display a manual cutter.
- · It incorporates an anti-theft system.
- Dimensions: 84" x 14" x 23" (2130x350x582 mm).

	REF.	-
MANUAL CUTTERS RACK (1 FACE)	93138	1



DISPLAY FOR MANUAL TILE CUTTERS

- · Capacity to display 3 manual tile cutters.
- Dimensions: 46" x 22" x 10" (1170x560x260 mm).

	REF.	=	
DISPLAY FOR MANUAL CUTTERS.	90305	1	6



DISPLAY FOR RUBI MIXERS

- $\cdot \cdot$ Display stand to hold two mixers and various mixing paddles.
- Dimensions: 79" x 48" x 29 1/2" (2000x1211x750 mm).

	REF.	
DISPLAY FOR MIXERS	91908	1
DISPLAY BOARD IMAGE RUBIMIX	26447	1
	1	<u> </u>



DISPLAY RANGE LEVELING

· Cardboard dispenser display for the levelling range.

	REF.	=
DISPLAY RANGE LEVELING	93056	1



SYMBOLOGY AND CERTIFICATIONS

In this catalogue to provide reader's with the maximum amount of information and to be as clearly as possible, we have used the following symbols:









3.2	3+2 years warranty	

3	3 year warranty	

PATENTEU	Patented
DATENT	Patent





















	D CEN	Н		C /11101
le read ls:	er's with the	ma	ximum	amount of info
	Units per pallet		•	Segment Thickness
=	Units per box			Diamond band height
\longleftrightarrow	Cutting length			Diamond band width
	Diagonal cutting length			Maximum drill length
	Cutting height			Mixing capacity
	Separator power			Max Height of the head
\bigcirc	Net weight without packaging		<u>}</u>	Rod's head diametre
*	Gross weight		r <u>i</u>	Wide notched trowel
	With carrying case			Notched height trowel
	Weight with carrying case		<u></u>	Notched Radius Trowel
5	Power supply		18	Trowel length
RPM	Revolutions per minute		X	Trowel width
W	Watts			Bags per box
	Mitre cutting length			N° tile spacers per bag
, dimi	Mitre Thickness cut			Height of bucket
x2	Maximum cutting thickness - 1 stroke or 2 strokes			Bottom diameter
	Length Width Height		<u></u>	Top diameter
O_l	Wall chaser effect			Useable height
	Cut length with saw effect			Sponge size
	With blade		\Diamond	Absorption level (1-4)
O	Outside diameter			Resistance to abrasion (1-4)



Plunge Effect

Rubi Group comply with the Directive 2002/96/EC on waste electrical and/or electronic and Directive 2002/95/EC on the restriction of certain substances in their manufacture, applying the law of each member state according to EEC your specific criteria. [WEEE, WEEE, ECCRAEE, etc...] (RoHS).

Images are for illustration purposes and may change without notice.

Inside

high

diameter

Disc segment

^{*}The gross weight of some electrical machines may vary depending on the type of pallet and carton type used in packaging.

^{**}Any manipulation or modification of machine voids the warranty. Our warranty covers defects in manufacturing or assembly in accordance with the applicable law.



RUBICLUB

JOIN THE COMMUNITY OF 70.000+ EXPERTS IN THE ART OF TILING

- 1. SIGN UP IN LESS THAN 1 MINUTE
- 2. EXTEND THE WARRANTY OF YOUR PURCHASES EASILY
- 3. GAIN ACCESS TO EXCLUSIVE BENEFITS AND GIFTS

SCAN THE QR CODE OR ENTER WWW.RUBI.COM





Club Rubi Email clubrubi@rubi.com



RUBI GROUP

RUBI TOOLS USA Inc.

10702 NW 147th Street, Suite 100

- P. 1 305 715 9892
- F. 1 305 715 9898













